

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: [Merging two-path and S-V models for LOS desktop channel environments]

Date Submitted: [July, 2006]

Source: [Hirokazu Sawada, Yozo Shoji, Chang-Soon Choi, Katsuyoshi Sato, Ryuhei Funada, Hiroshi Harada, Shuzo Kato, Masahiro Umehira, and Hiroyo Ogawa]

Company [National Institute of Information and Communications Technology]

Address [3-4, Hikarino-Oka, Yokosuka, Kanagawa, 239-0847, Japan]

Voice:[+81.46.847.5096], FAX: [+81.46.847.5079], E-Mail:[sawahiro@nict.go.jp]

Re: []

Abstract: [This contribution describes update of the generic channel model merging two-path and S-V models.]

Purpose: [Contribution to mmW TG3c meeting.]



Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

Agenda

- Channel model for LOS desktop environments
- Proposal of TSV model
- Measurement procedure and results
- Extracted TSV model parameters

Importance of channel model for LOS desktop

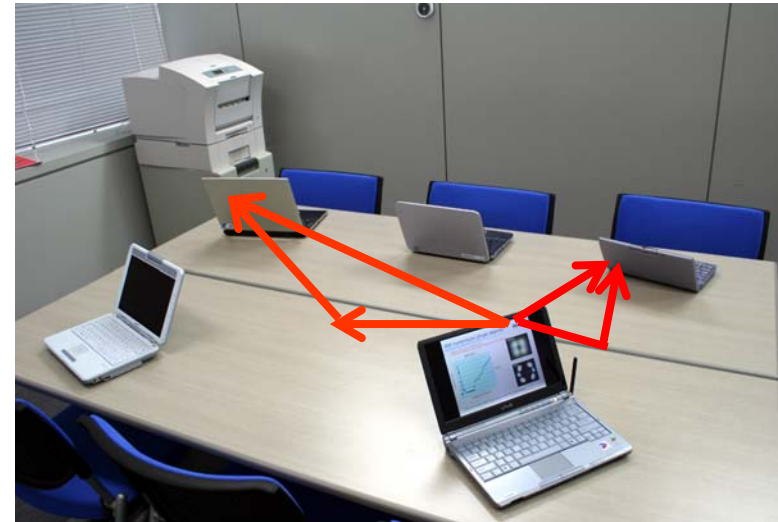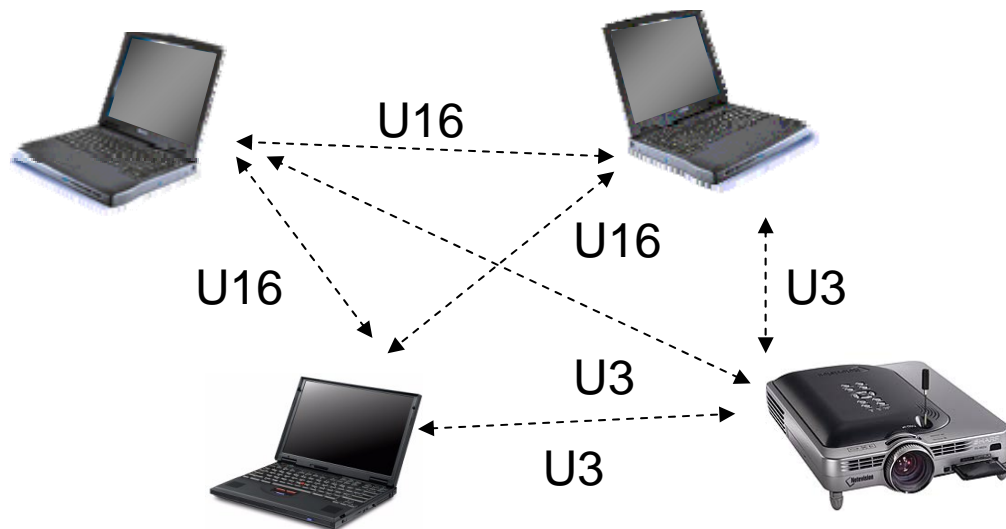


- LOS desktop is one of useful channel environments for TG3c
- Important to develop channel model for LOS desktop


What is suitable channel model for LOS desktop?

- Two-path model is suitable to express **LOS desktop environment** (06/109)
- Developing **statistical two-path model** and merging with S-V model was proposed for TG3c generic channel model (06/228)
- This model is named **TSV model** (Triple SV: Shoji, Sawada, Saleh and Valenzuela model)

Results: Path loss in two-path response

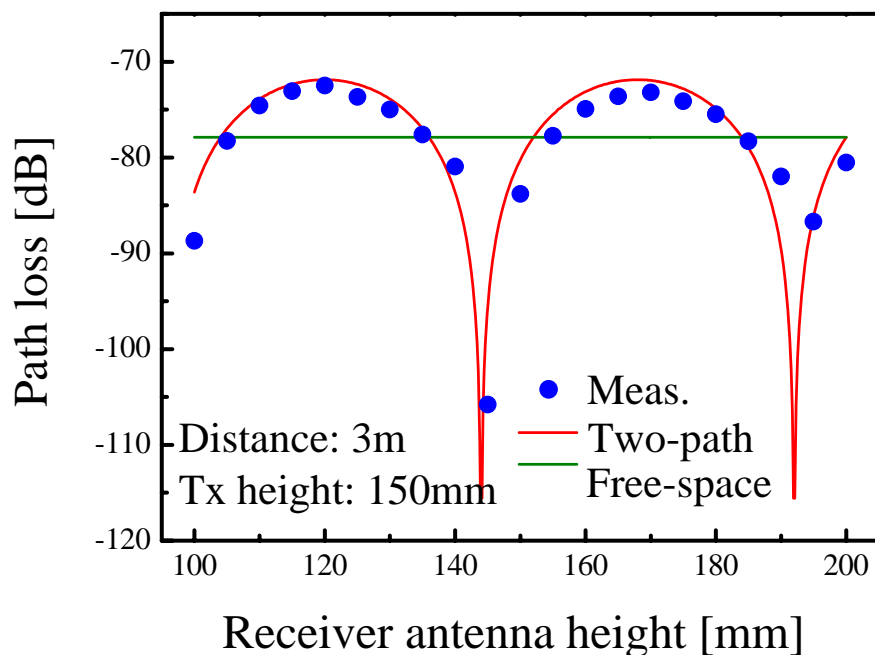

Path loss vs Rx height

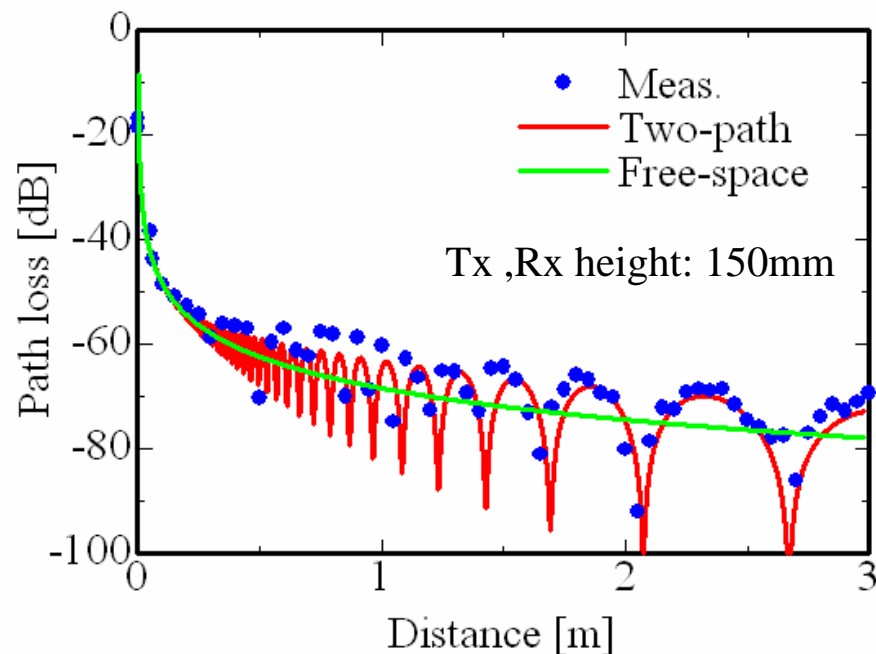


Path loss vs distance

Two-path model is suitable to express propagation phenomena in LOS desktop environment

Proposed TSV model

TSV model = Statistical two-path model + S-V model

$$h(t) = \beta \delta(t) + \sum_{l=0}^{L-1} \sum_{m=0}^{M_l-1} \alpha_{l,m} \delta(t - T_l - \tau_{l,m}) \delta(\varphi - \Psi_l - \psi_{l,m}) \sqrt{G_r(0, \Psi_l + \psi_{l,m})}$$

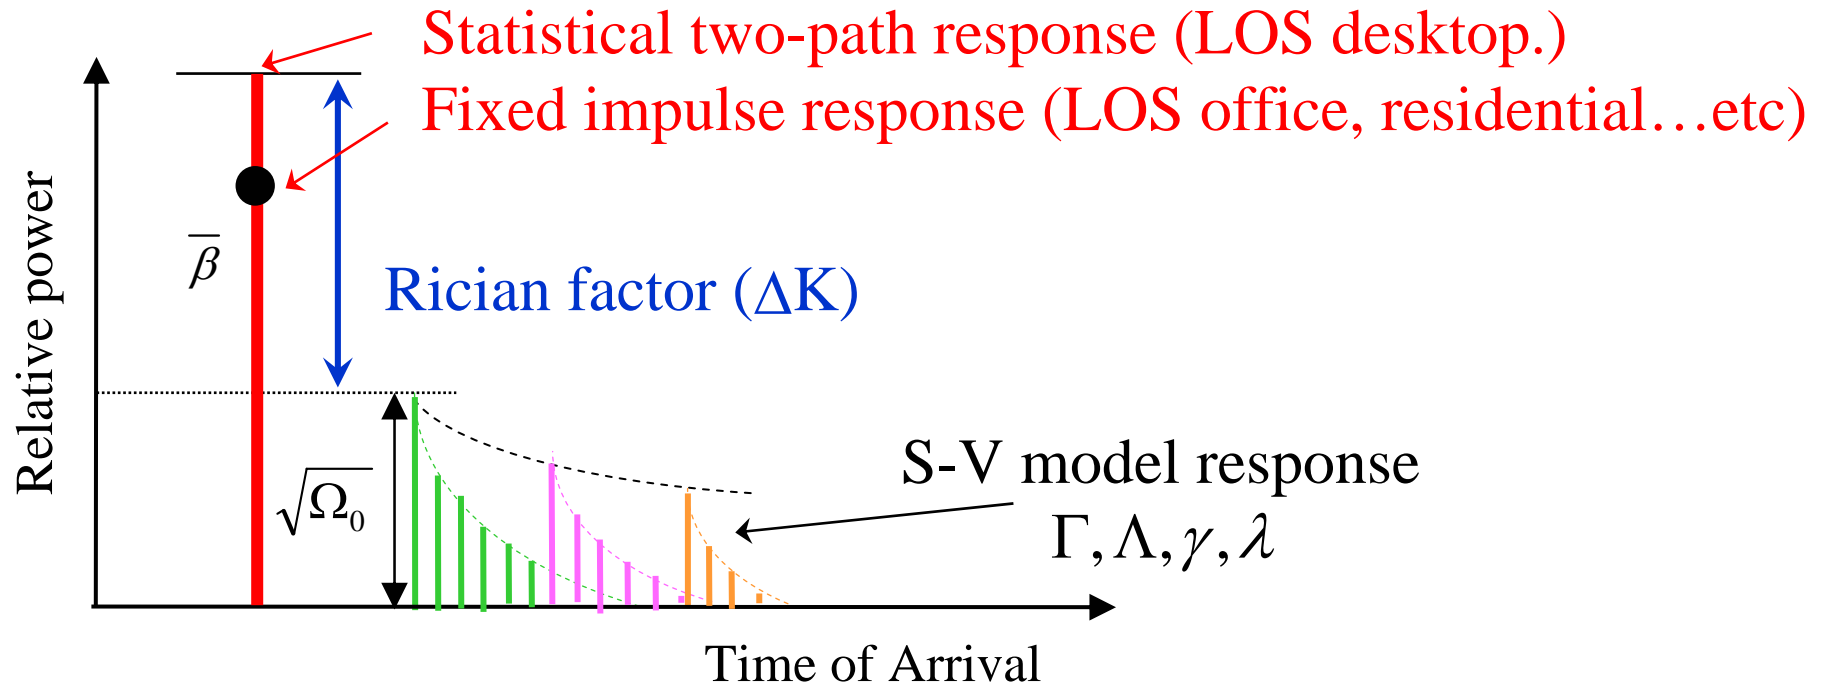

Refer to Appendix A for each parameter

Purpose of measurement

- To confirm the validity of TSV model in LOS desktop environments
- To extract TSV model parameters

Measurement conditions

Instrument	HP8510C VNA
Center frequency	62.5 GHz
Bandwidth	3 GHz
Time resolution	0.333 ns
Distance resolution	19.1 cm
# of frequency points	801
Frequency step	3.75MHz
Times of average	128 times

Time resolution and distance resolution were determined by bandwidth

Measurement conditions (cont')

- **Antenna:** Conical horn antenna
- **Polarization:** Vertical
- **Beam-width:** Tx:30 and Rx 30, Tx:60 and Rx60




Conical horn antenna
Beam-width 30 deg



Conical horn antenna
Beam-width 60 deg

Measurement environment

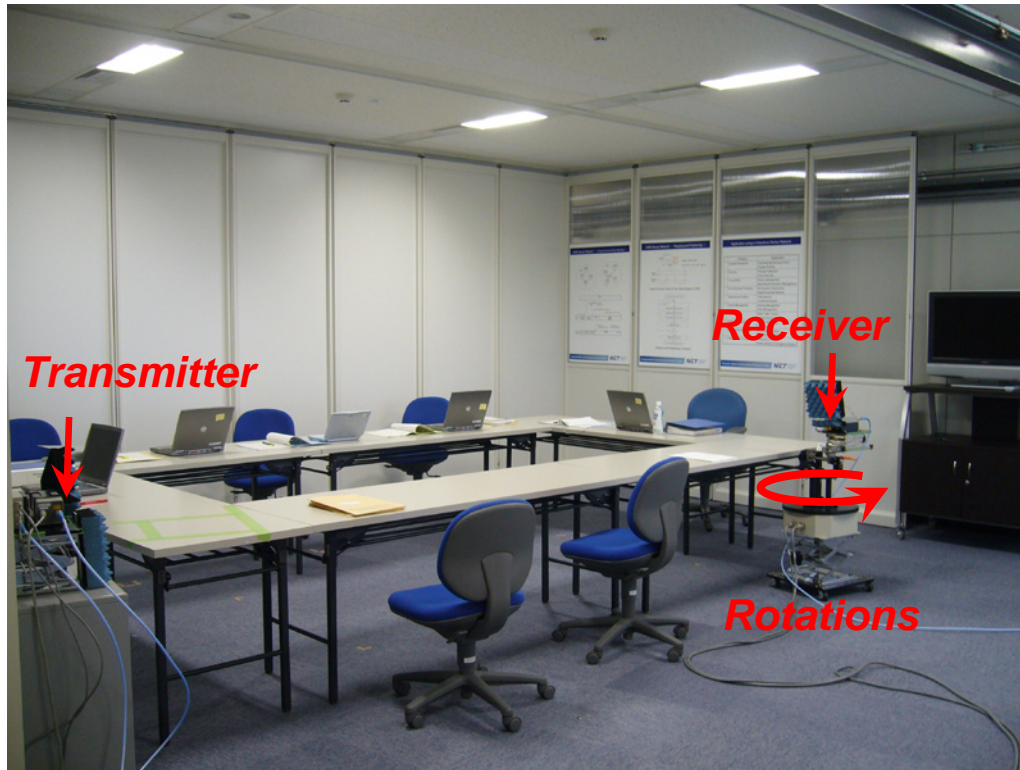



- Small conference room: 6.4 m × 7.4 m
- Ceiling height: 2.7 m
- Surrounding: metallic wall, glass window
- Floor: Plaster board covered with carpet
- Furniture: Wooden desk, chair, computer, LCD TV, white board

Receiver was rotated 0 to 360 in 5 degree step

Measurement environment

Absorber

Antenna

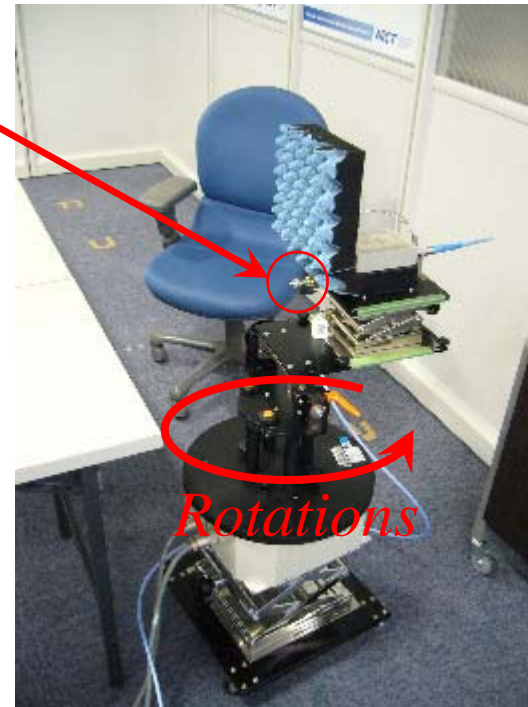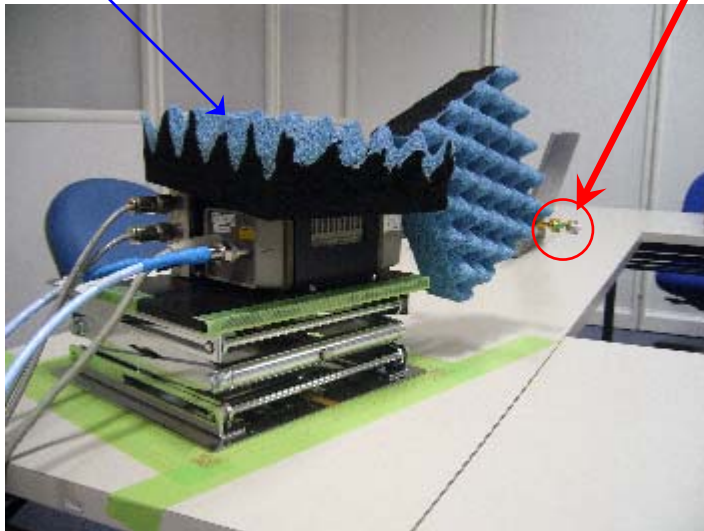


Tx side

Rx side

- Receiver was not put on the desk due to large rotator size
- Calibration was done at 1 m distance


AoA measurement environment (Two-path)

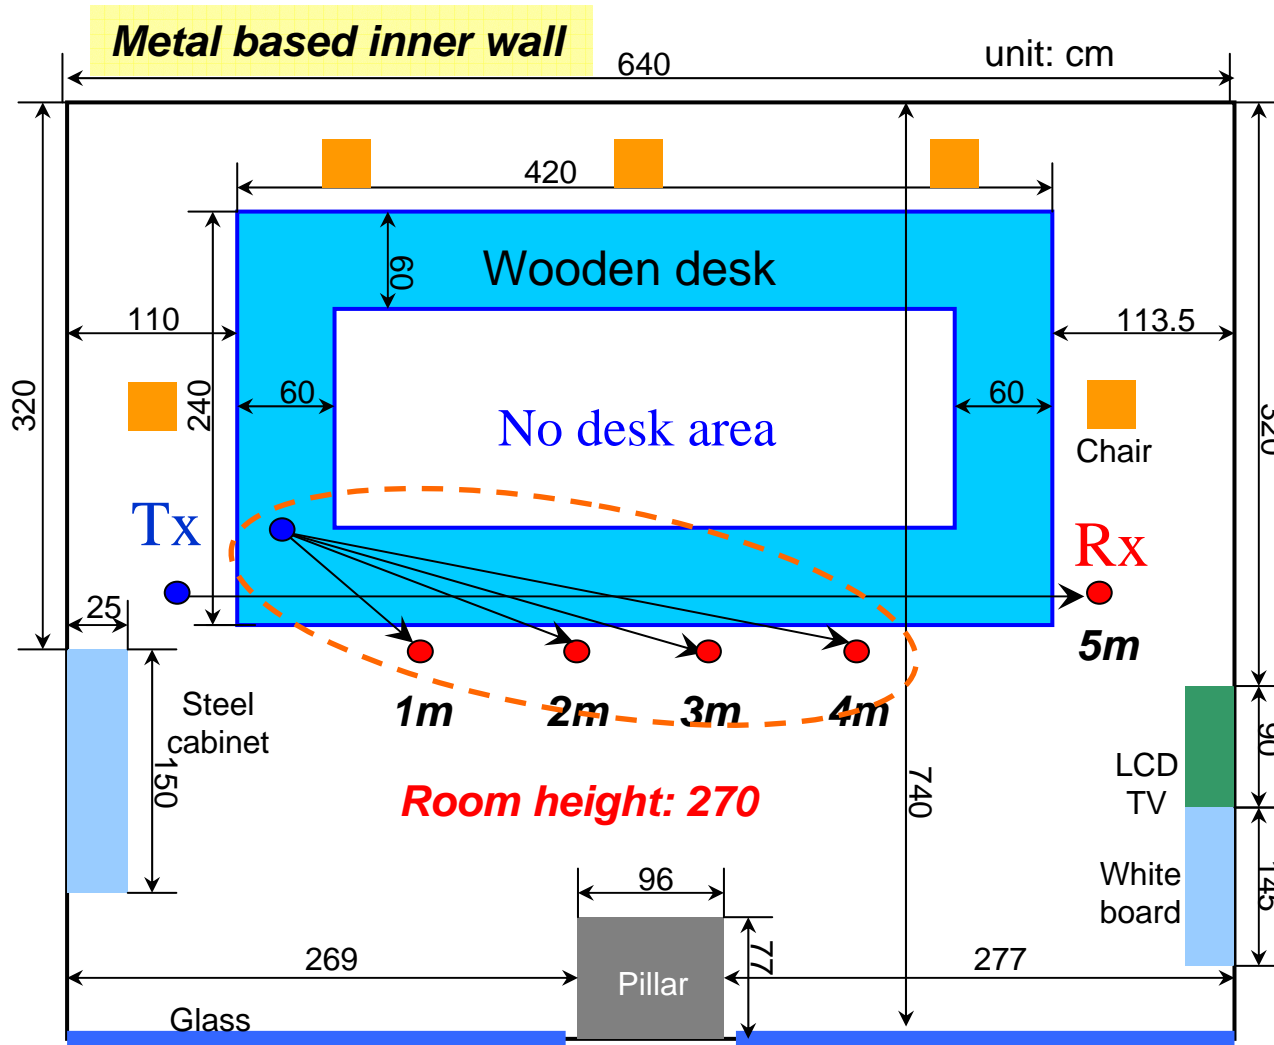

Reflection from the desk

Antenna height from desktop
 $T_x = 15 \text{ cm}$
 $R_x = 15 \text{ cm}$

AoA measurement environment (Spatial)

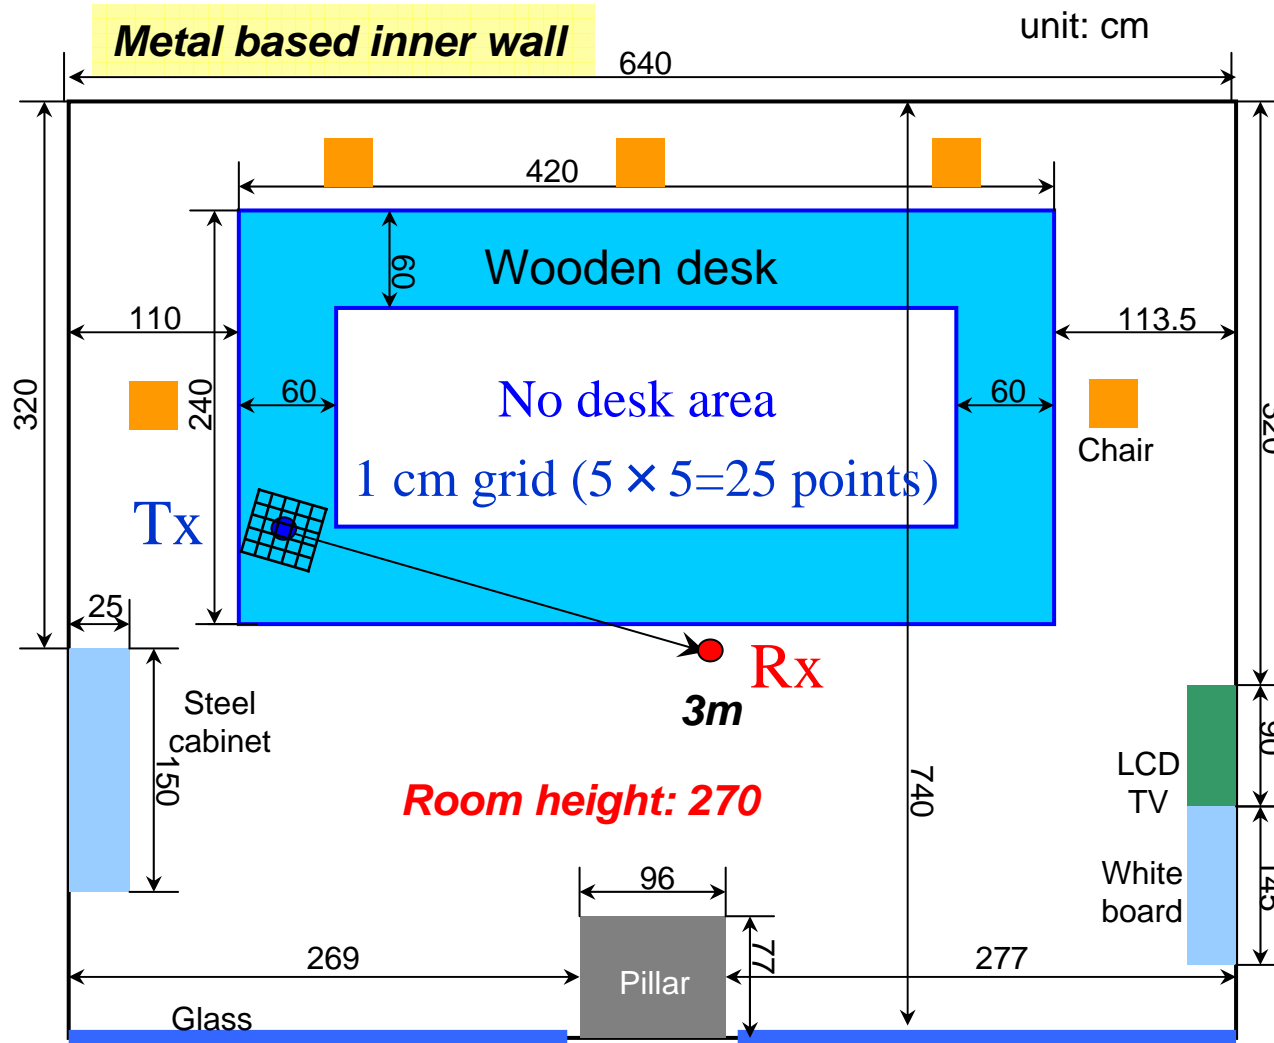

To characterize
small-scale fading


Only 3m
transmission

Antenna height
from desktop

Tx = 15 cm

Rx = 15 cm

AoA measurement environment (Two heights)

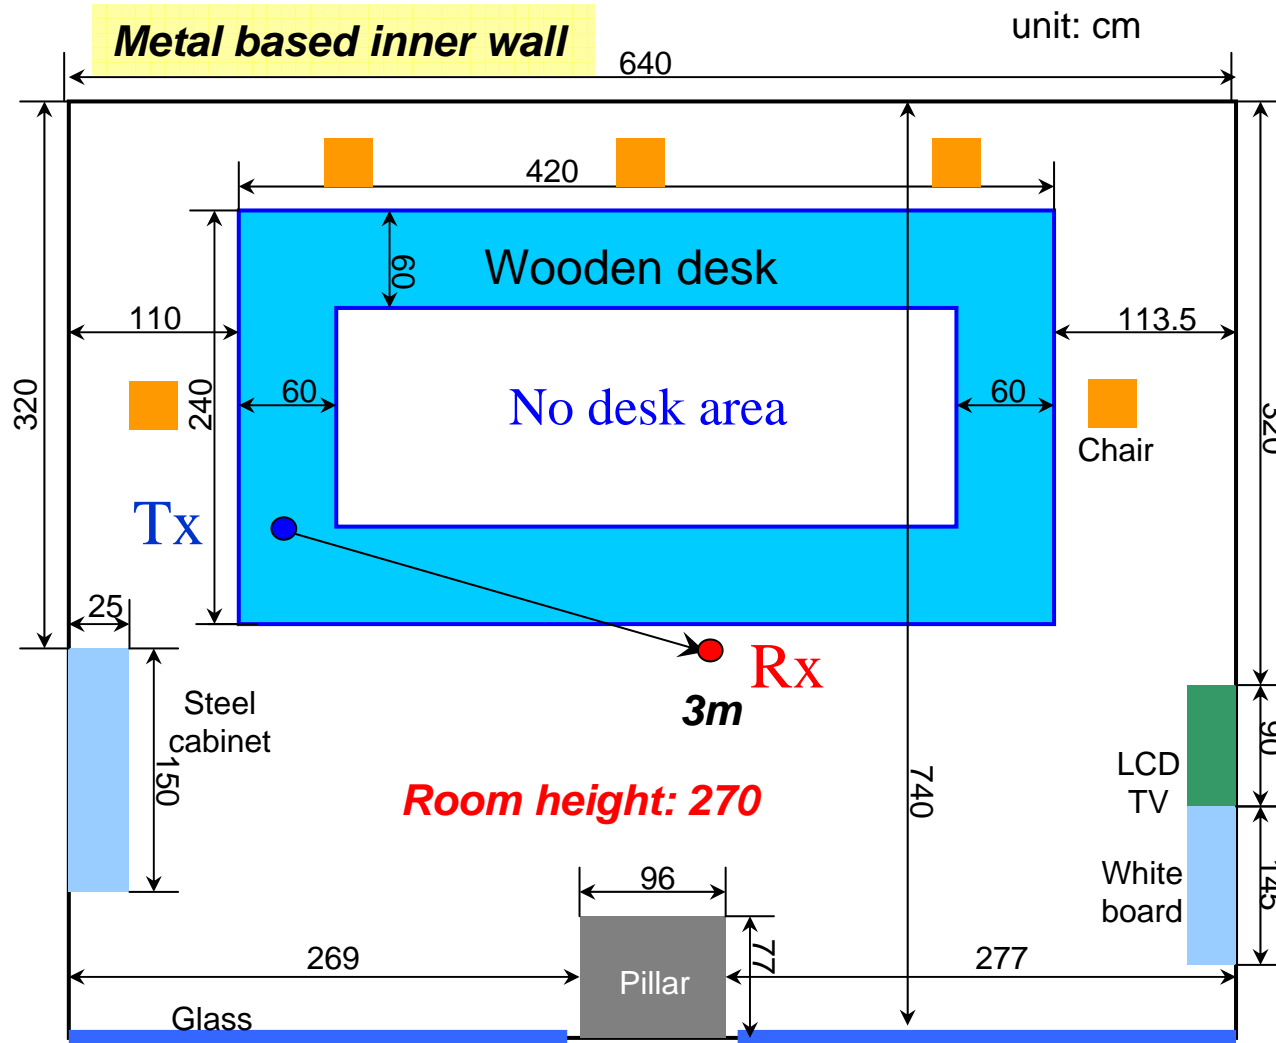


Only 3m
transmission

Antenna height
from desktop
Tx = 17, 14.3 cm
high- and low-
Rician cases
Rx = 15 cm

Measurement results


PDPs for two different antenna heights

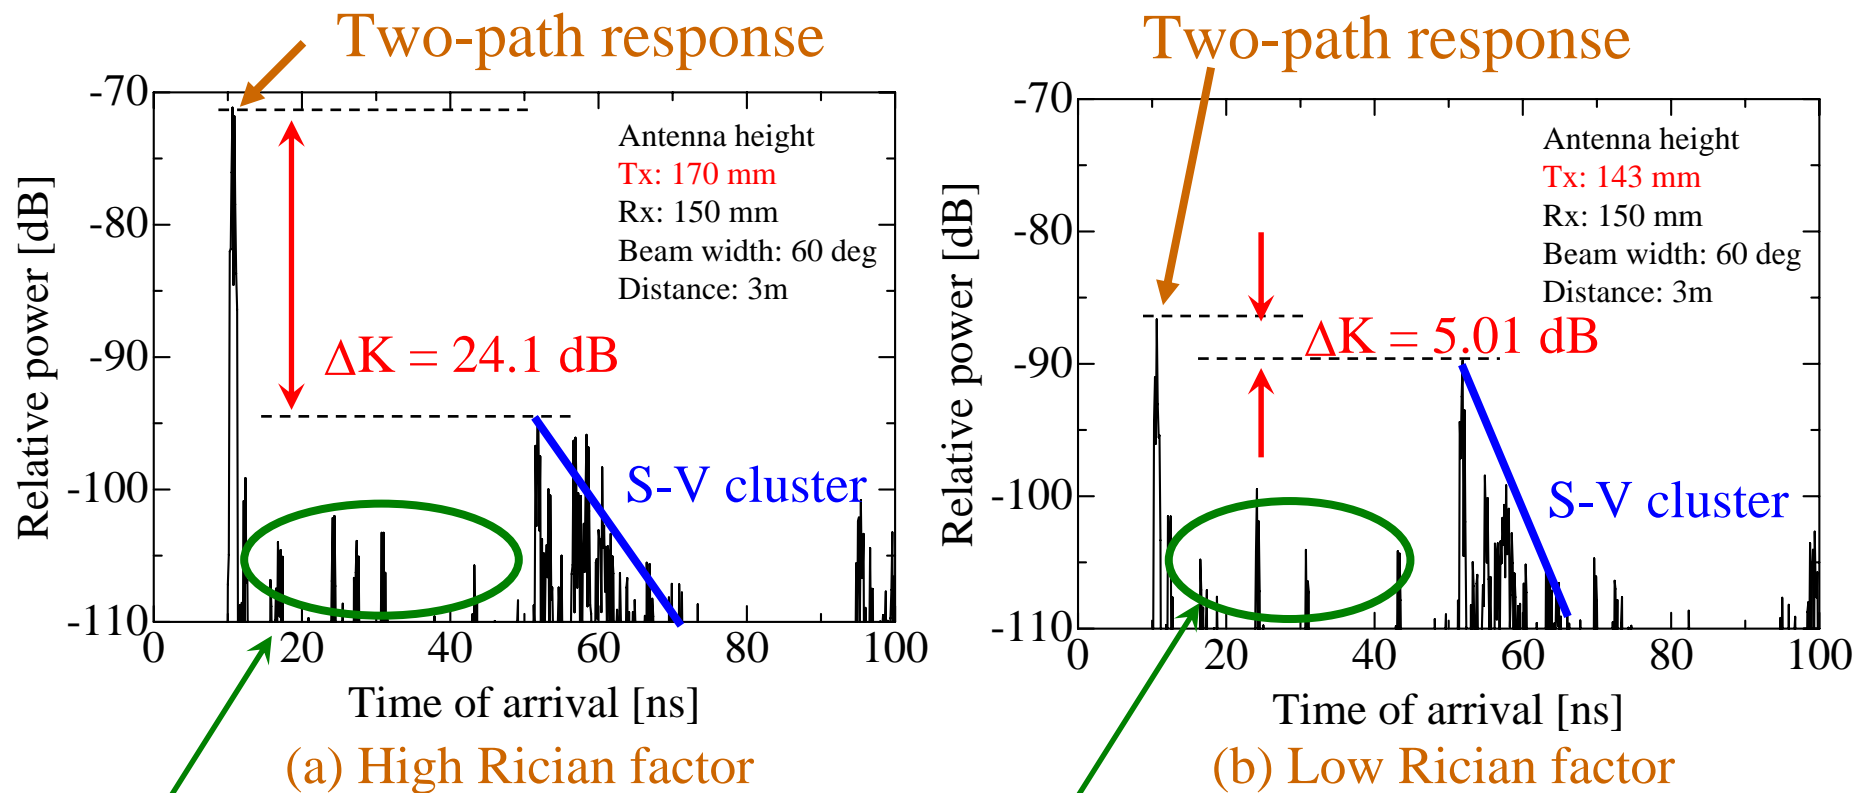

Side-lobe effect of window function in IFFT

- ΔK has 19dB dynamic range
- TSV model is well expressing LOS desktop

TSV model parameters to be extracted

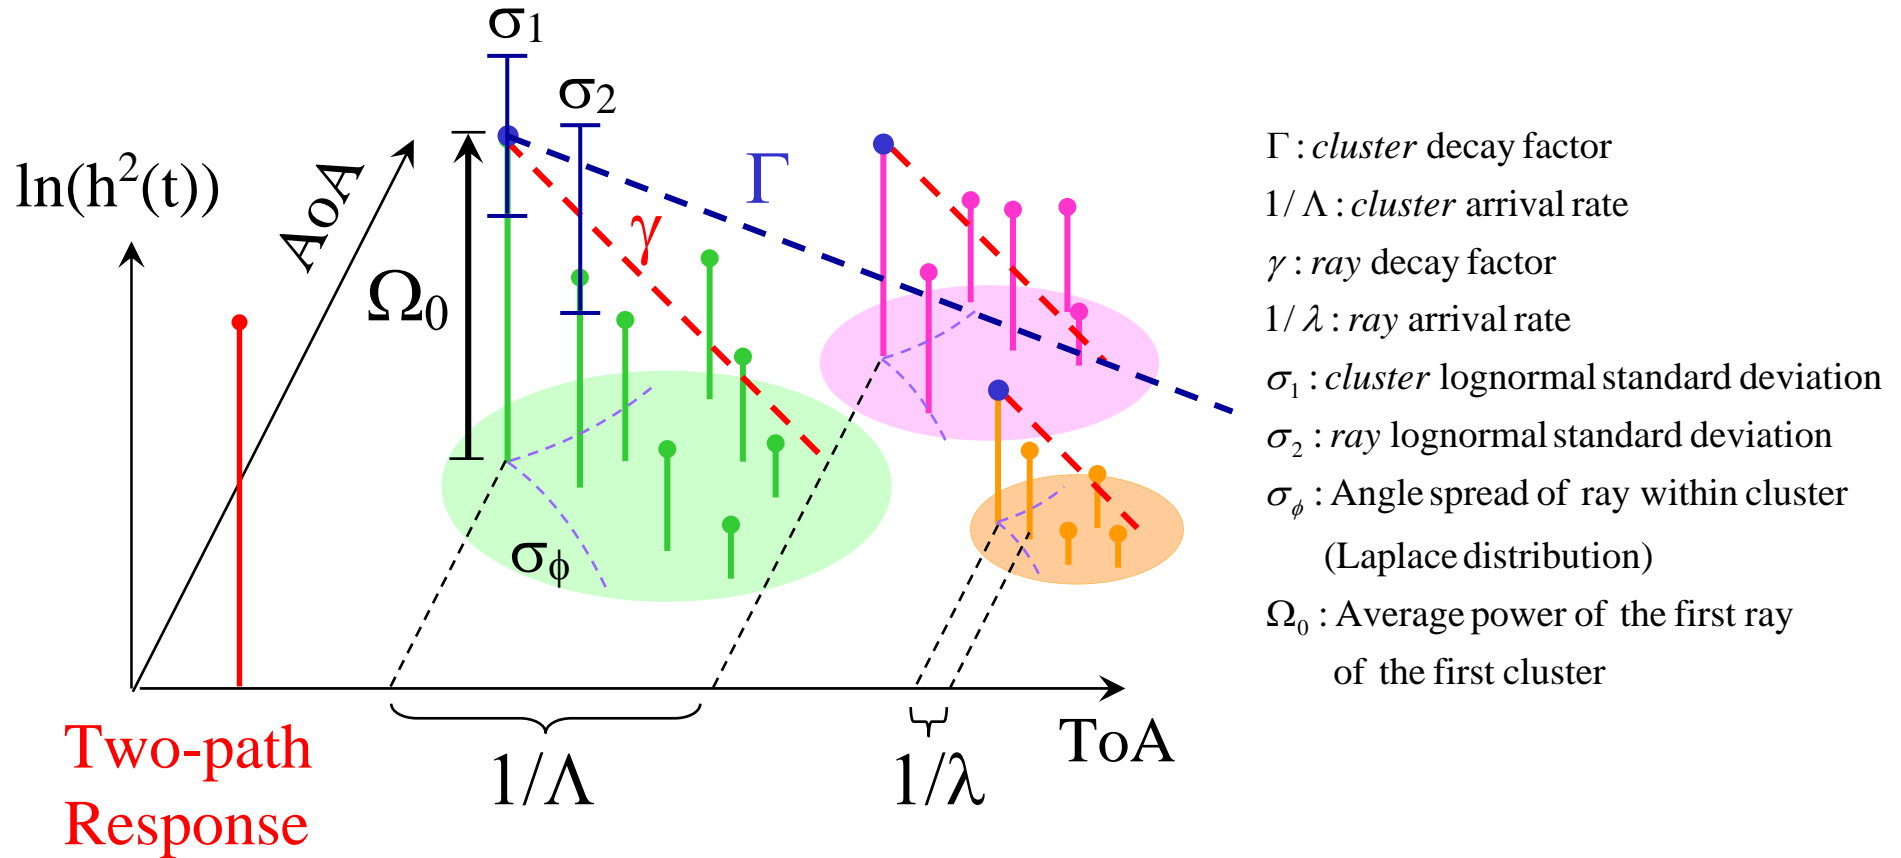

S-V parameter and Ω_0 are required for TSV model

Extracted TSV model parameters


Parameter	TSV Model	S-V model oriented parameter							Two-path @3m		Non-two path @3m
		Γ [ns]	$1/\Lambda$ [ns]	γ [ns]	$1/\lambda$ [ns]	σ_1 cluster	σ_2 ray	σ_ϕ [deg]	Max. ΔK [dB]	Min. ΔK [dB]	ΔK [dB]
Tx:30 Rx:30	4.44 D-105	21.1	27.0	8.85	1.56	3.01	7.69	34.6	27.0	10.2	23.7
Tx:60 Rx:60	3.46 D-98	22.3	21.1	17.2	2.68	7.27	4.42	38.1	24.1	5.01	19.6

Variable

Constant

Channel model for LOS desktop environment is available


Calculated CDF of ΔK

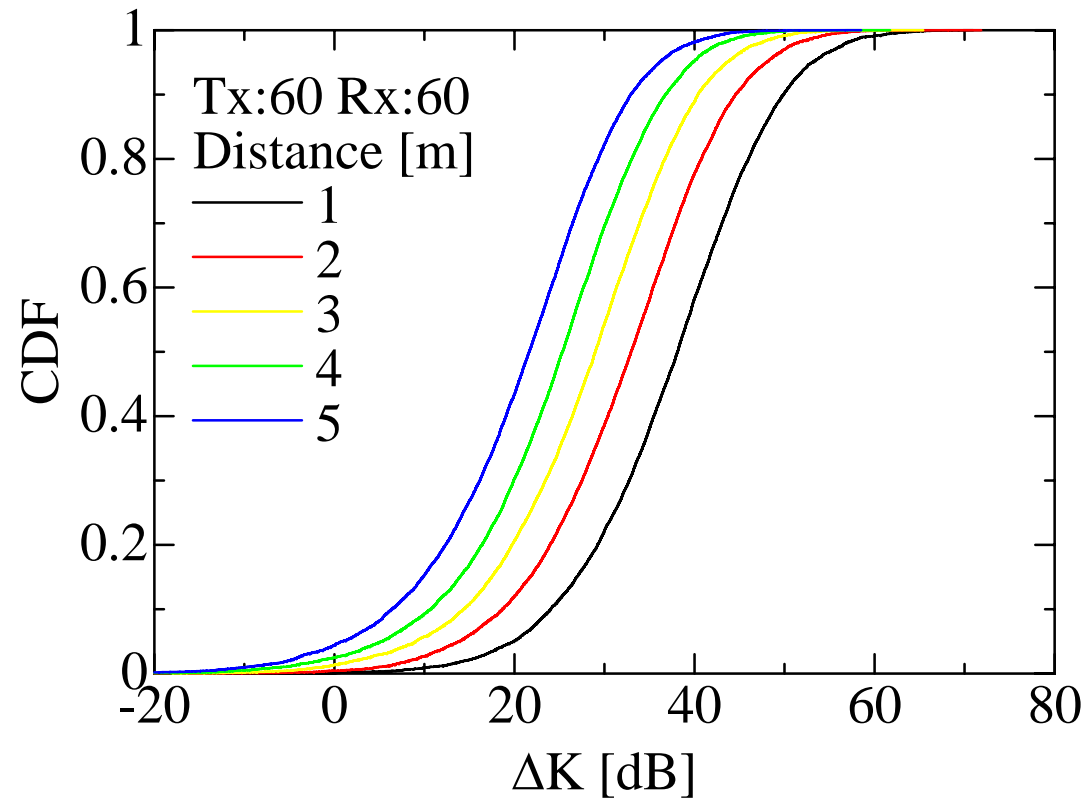

High ΔK can be usually obtained in short range communication

ΔK in LOS indoor environments

- TSV model can be applied in any LOS environment
- TSV model parameters for LOS residential environments can be obtained since we have measurement data (06/012)

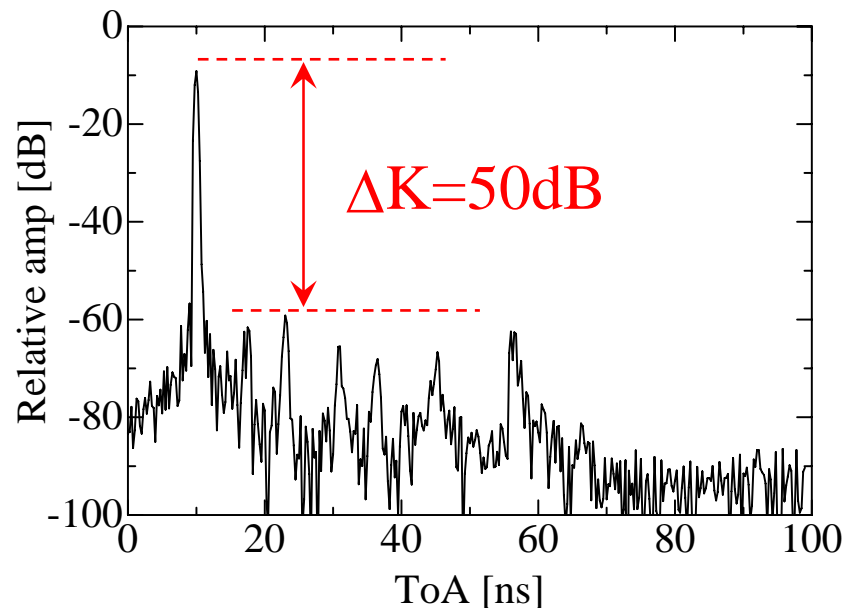

LOS Residential (NICT data)
Tx: 15 deg Rx: 15 deg

Conclusion

- TSV model is well expressing LOS desktop environment
- Characteristics of variable ΔK were clarified
- TSV model with extracted parameters is now available
- TSV model can be applied for any LOS environment
- MATLAB code for TSV model will be available soon

Appendix A: Definition of TSV model

CIR:
$$h(t) = \beta \delta(t) + \sum_{l=0}^{L-1} \sum_{m=0}^{M_l-1} \alpha_{l,m} \delta(t - T_l - \tau_{l,m}) \delta(\varphi - \Psi_l - \psi_{l,m}) \sqrt{G_r(0, \Psi_l + \psi_{l,m})}$$

(Complex impulse response)

$$|\alpha_{l,m}|^2 = \Omega_0 e^{-T_l/\Gamma} e^{-\tau_{l,m}/\gamma}, \angle \alpha_{l,m} \propto \text{Uniform}[0, 2\pi)$$

t : time[ns]
 $\delta(\cdot)$: Delta function
 l = cluster number,
 m = ray number in l -th cluster,
 L = total number of clusters;
 M_l = total number of rays in the l -th cluster;
 T_l = arrival time of the first ray of the l -th cluster;
 $\tau_{l,m}$ = delay of the m -th ray within the l -th cluster relative to the first path arrival time, T_l ;
 Ω_0 = Average power of the first ray of the first cluster
 $\Psi_l \propto \text{Uniform}[0, 2\pi)$; arrival angle of the first ray within the l -th cluster
 $\psi_{l,m}$ = arrival angle of the m -th ray within the l -th cluster relative to the first path arrival angle, Ψ_l

Two-path response

$$\beta = \left(\frac{\mu_D}{D} \right)^2 \left| \sqrt{G_{r1} G_{r1}} + \sqrt{G_{r2} G_{r2}} \Gamma_0 \exp \left[j \frac{2\pi}{\lambda_f} \frac{2h_1 h_2}{D} \right] \right|$$

Path number of G_{r1} and G_{r2} (1 : direct, 2 : reflect)

Arrival rate: Poisson process

$$p(T_l | T_{l-1}) = \Lambda \exp[-\Lambda(T_l - T_{l-1})], \quad l > 0$$

$$p(\tau_l | \tau_{l,(m-1)}) = \lambda \exp[-\lambda(\tau_l - \tau_{l,(m-1)})], \quad m > 0$$

Two-path parameters (4)

$D \propto \text{Uniform}$: Distance between Tx and Rx

$h_1 \propto \text{Uniform}$: Height of Tx

$h_2 \propto \text{Uniform}$: Height of Rx

$|\Gamma_0| \cong 1$: Reflection coefficient

(incident angle $\cong \pi/2$)

S-V parameters (7)

Γ : cluster decay factor

$1/\Lambda$: cluster arrival rate

γ : ray decay factor

$1/\lambda$: ray arrival rate

σ_1 : cluster lognormal standard deviation

σ_2 : ray lognormal standard deviation

σ_ϕ : Angle spread of ray within cluster

(Laplace distribution)

Antenna parameters (2)

$G_t(\theta, \phi)$: Antenna gain of Tx


$G_r(\theta, \iota)$: Antenna gain of Rx

Rician factor (1)


$$K = \frac{\beta^2}{\sum_{l=0}^{L-1} \sum_{m=0}^{M_l-1} |\alpha_{l,m}|^2 \delta(t - T_l - \tau_{l,m}) \delta(\varphi - \Psi_l - \psi_{l,m}) G_r(0, \Psi_l + \psi_{l,m})}$$

Appendix B: Results of data analysis


Antenna beamwidth
Tx: 60 deg, Rx: 60 deg

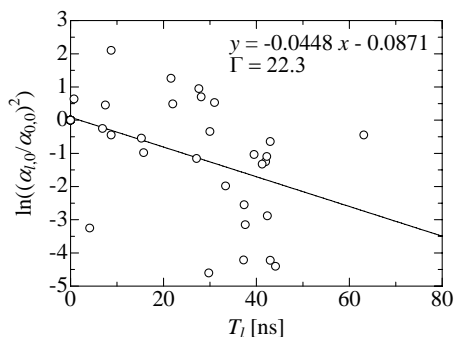


Cluster decay factor (Γ)

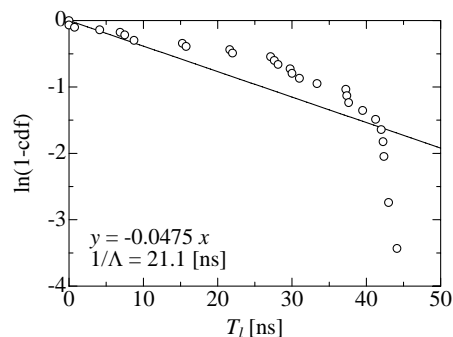


Cluster arrival rate ($1/\Lambda$)

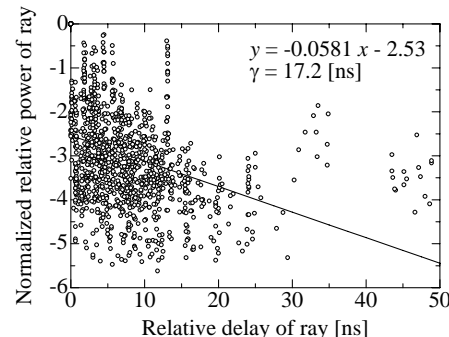


Ray decay factor (γ)

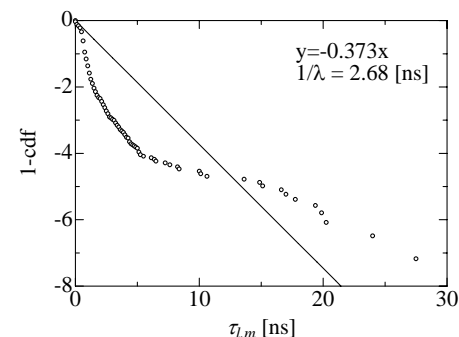


Ray arrival rate ($1/\lambda$)

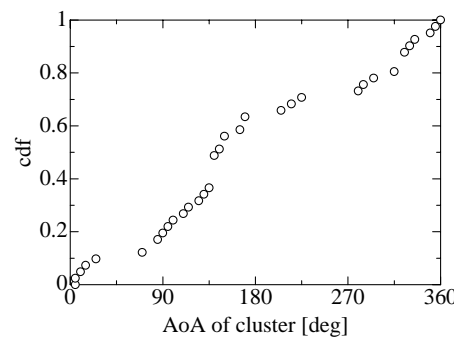


Angle of arrival in cluster (∞ Uniform)

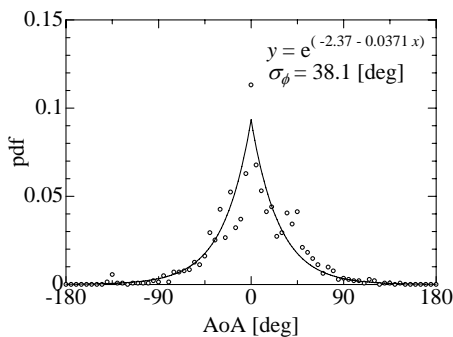

Angle spread of ray (σ_ϕ)


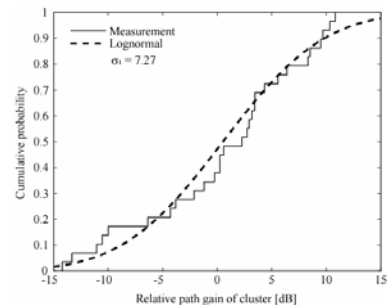


Standard deviation of cluster (σ_1)

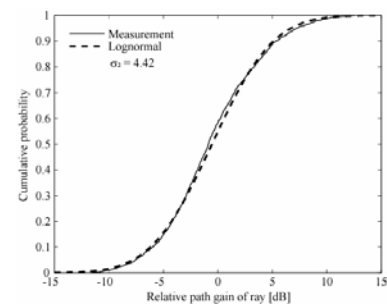

Standard deviation of ray (σ_2)

Appendix C: Averaged power of the first ray of S-V response

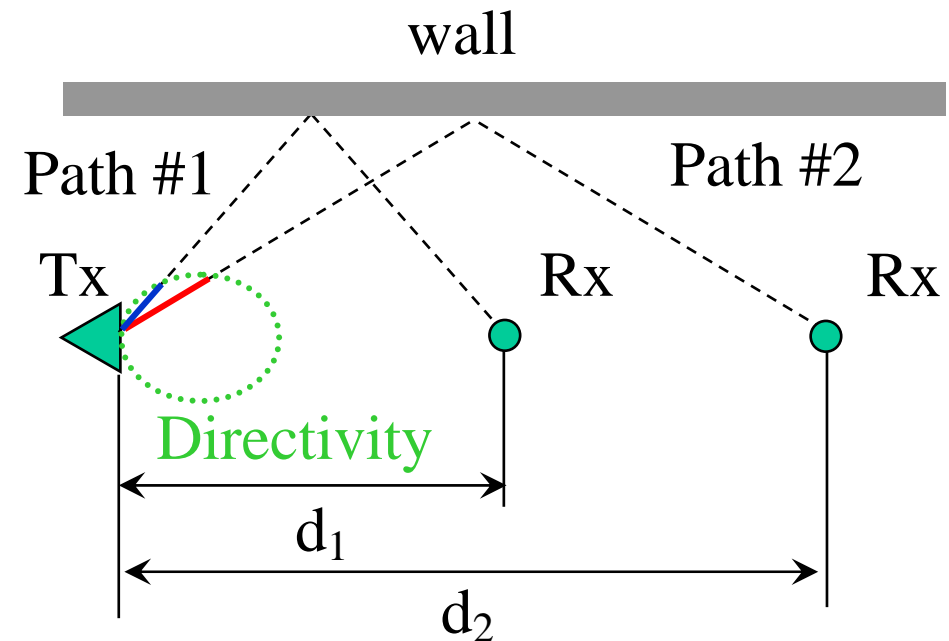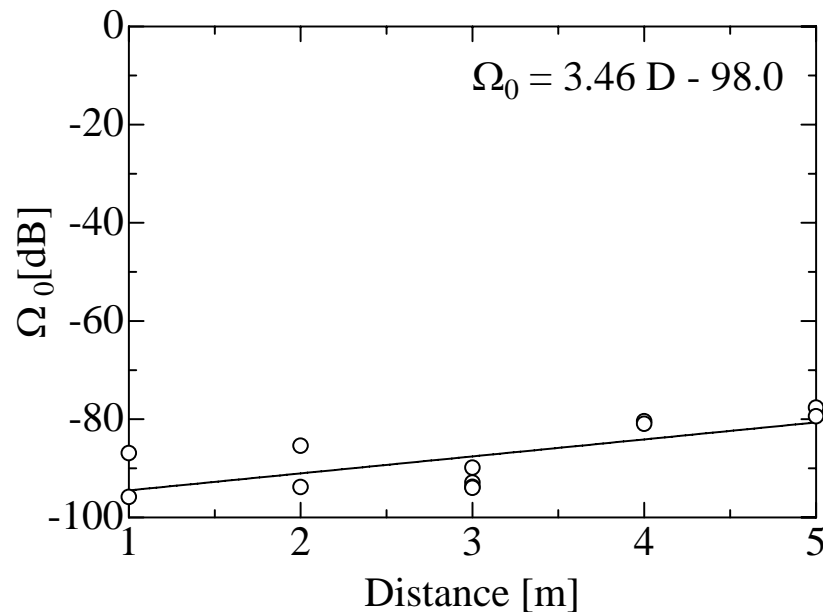

- Ω_0 increases due to distance, because directional antenna is used in transmitter
- **Conventional S-V model does not consider this effect**