Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: [Latest Japanese Spectrum Mask for UWB]

Date Submitted: [September 22, 2005]

Source: [Ryuji Kohno]

Company [National Institute of Information and Communications Technology (NICT), Yokohama National University(YNU)]

Contact: Ryuji Kohno

Voice:[+81 46 847 5108, E-Mail: kohno@nict.go.jp]

- **Abstract:** [A draft of spectrum mask for UWB in 3-10GHz has been announced in Japanese regulator MIC on August 25, 2005. Although this mask is still a draft and should be revised to be approved in Japanese radio regulation, it is important for IEEE P802.15 standard to be compliant in a world as well as other nations' masks.]
- **Purpose:** [Suggestion to modify specifications such as a band plan, sequence, FEC, MAC and additional requirement for IEEEP802.15 in microwave band to be world-wide compliant.]
- **Notice:** This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.
- **Release:** The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

Latest Japanese Spectrum Mask for UWB

Ryuji Kohno National Institute of Information and Communications Technolog (NICT), Yokohama National University (YNU)

Liaison with Japanese Regulator (MIC)

Japanese UWB radio regulation Context

- Japanese regulator MIC established UWB Radio Systems Regulatory Committee, November 22, 2002.
- MIC reported intermediate draft spectral masks, February 2, 2004.
- MIC mandated MMAC Forum in ARIB to test interference to victim systems during March-August, 2005
- MIC reported latest draft spectral mask on August 25, 2005.
- MIC will submit the draft with possible revision to ITU-R TG1/8 during Oct.12-20, 2005

UWB Radio Systems Regulatory Committee in MIC(*MPHPT*) Telecommunications Council

> Four working groups were set up to investigate compatibility between UWB and other radio communication systems in Nov. 2002:

- WG1: Compatibility Model Working Group,
- WG2: Fixed-Broadcasting systems Working Group,
- WG3: Radar-Aviation and Maritime systems Working Group
- WG4: Satellite-Low Power systems Working Group
- Comments were invited on the Draft Interim Report
 22 submissions received in the period 2 27 February 2004


Basic principles of compatibility model in Japan

- (1) Radio spectrum is a finite resource. As such, radio spectrum usage should adhere to international systems of rules and should be carefully designed to avoid future problems.
- (2) As yet, **UWB stations do not belong to any designated service and the UWB format is not based on the Radio Regulations (RR) allocations.** As such, it is not considered in compliance with stipulations.
- (3) The study of compatibility conditions is predicated on radio regulations (RR) Section 4.4 concerning interference.


[Radio Regulations. Section 4.4]

Administrations of the Member States shall not assign to a station any frequency in derogation of either the Table of Frequency Allocations in this Chapter or the other provisions of these Regulations, except on the express condition that such a station, when using such a frequency assignment, shall not cause harmful interference to, and shall not claim protection from harmful interference caused by, a station operating in accordance with the provisions of the Constitution, the Convention and these Regulations.

UWB Models and Spectral Mask in Japan Different types of UWB radio systems under consideration

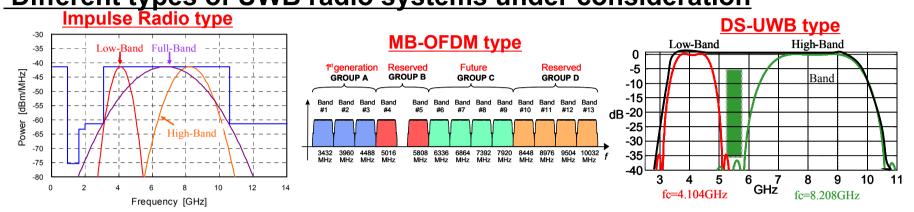

Draft Proposals for emission power spectral mask (Feb.2, 2004)

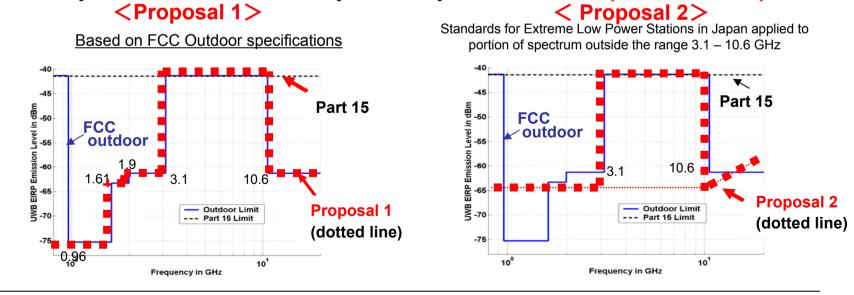

Slide 6

UWB Interference Measurement Report of **MMAC Forum, Japan** UWB Demonstration Experiments Task Force (Over 30 companies joined during March-August 2005)

Victim systems are categorized to 5 groups to test Fixed Micro systems Broadcasting (Analog FPU, Digital FPU) Satellite • Base station (GPS, Mobile BC, FSS) Cellular phones (1xEV-DO, PDC, WCDMA) Wireless Access (WLAN IEEE802.11a, 11j)


The common UWB interference signal sources are as follows. ① MB-OFDM (made by Wisair , offered by Ti/Intel) ② DS-UWB (made and offered by FSL) ③ IR (PRF =1M& 10MHz) (made and offered by NICT) ④ AWGN Intol

UWB Interference Measurement Report of **MMAC Forum, Japan** http://www.arib.or.jp/mmac/e/index.htm


UWB Demonstration Experiments Task Force

Over 30 companies joined

Spectral Allocation of Tested Victim Systems

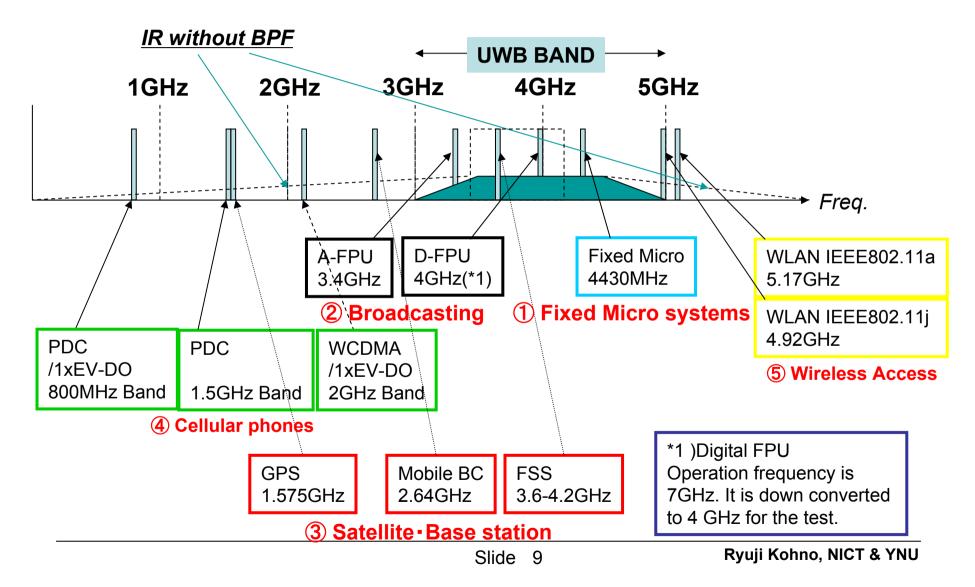



Simplified Common Experiment Scheme ~ Always Wired~

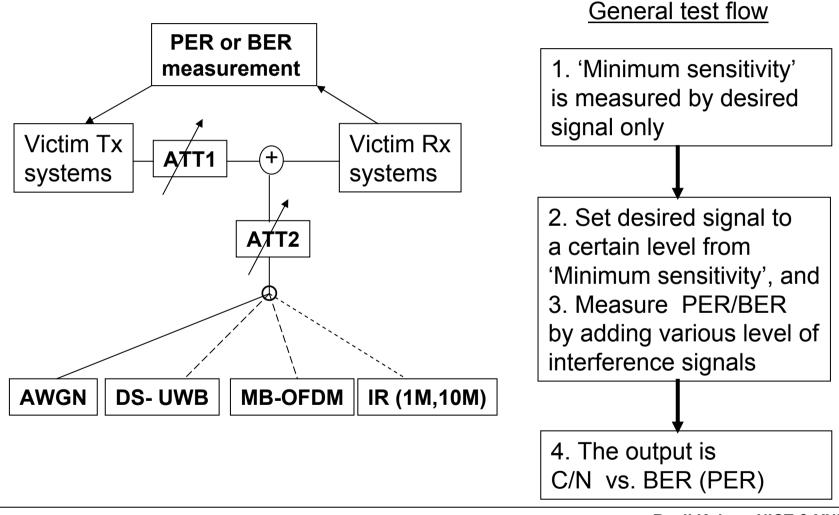

|--|

Group	Tested system	Test Done at	Reported to Telecommunication							
Fixed Micro systems	Fixed Micro	Mar.22-24								
Broadcasting	Digital FPU Analog FPU	July 19-20	Done at August 25 th . Therefore, the report is							
Cellular phones	1xEV-DO	May 23-26	open to the public.							
	PDC&WDCM A	July 4-6								
Satellite Base	GPS	April 19-20	1							
station	Mobile Broadcasting	July 11-12	Not open yet as of Sep. 7th							
(Common test done April 11 ^{th)}	FSS	August 2-5	Not open yet as of Sep. 7th							
Wireless Access	11a, 11j	June 7-9	Not open yet as of Sep. 7th							

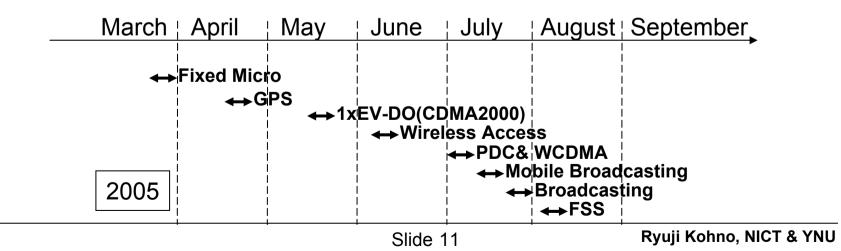

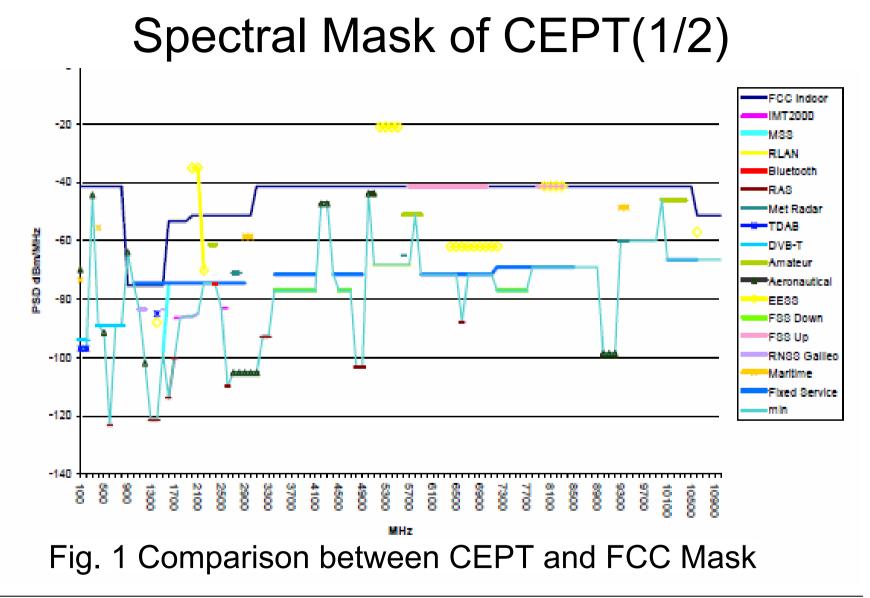

Slide 12

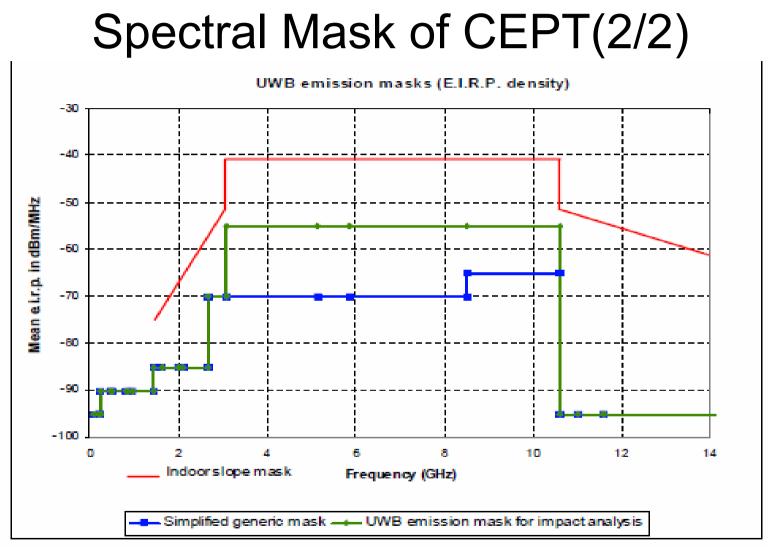



Fig. 2 Switzerland Proposed Mask to ITU-R TG1/8

Slide 13

Ryuji Kohno, NICT & YNU

Present Regulations for UWB in Singapore

- Impose slightly less stringet emission limits to encourage experimentation and innovation
- UWB operation is permitted for demonstration or trial purpose
 - FCC's Limits applicable
 - to demo use
 - IDA's trial emission mask applicable to trial

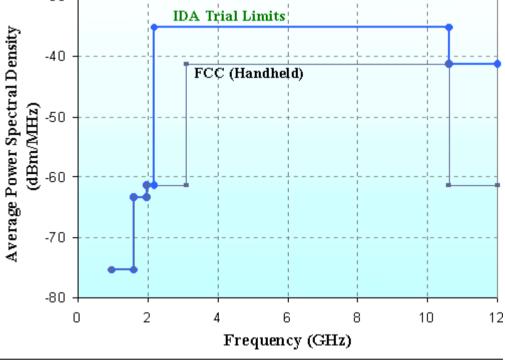


Reference:

use

http://www.ida.gov.sg/idaweb/techdev/infop age.jsp?infopagecategory=18:techdev&vers ionid=4&infopageid=12107

Slide 14

Draft Spectrum Mask in Japan (MIC)

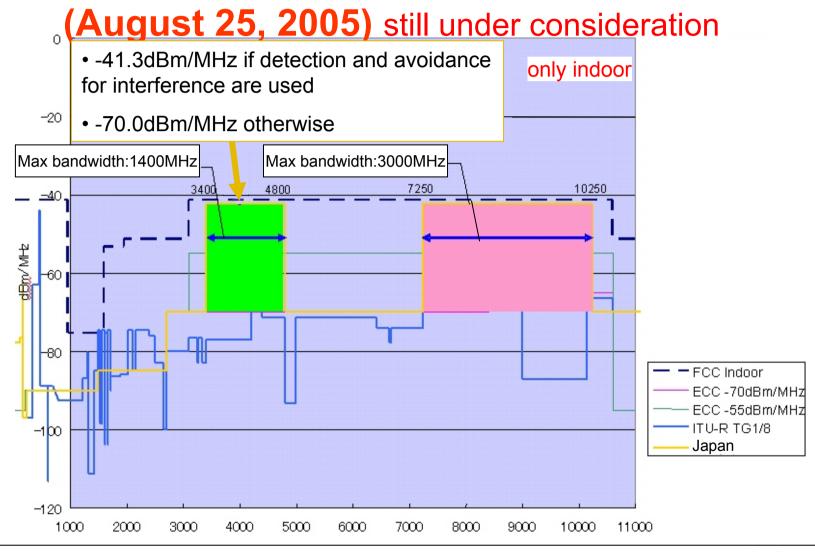

Slide 15


Ryuji Kohno, NICT & YNU

Last EU Regulatory News (Sept.15, 2005)

	General Devices witout Mitigation (Indoor)				Detect and Avoid (DAA)		Low Duty Circly Devices		
Agreed		No Mitigation		Mitigation+Indoor		5% / Sec AND 0,5% / Hour			
Frequency	GHz		Average	Peak	Average	Peak	Average	Peak	
below	1,6		-90	-50					
1,6	2,7		- <mark>8</mark> 5	-45					
2,7	3,1		-70	-30	Agreed		Proposed (T	o be finalised	in Nov. 2005)
3,1	4,95		-70	-30	-41,3	0	-41,3	0	
4,95	6		-70	-30					
6	9		-41,3	0					
9	10,6		-65	-25					
avove	10,6		-85	-45					
			dB/MHz	dB/50MHz	dB/MHz	dB/50MHz	dB/MHz	dB/50MHz	
4,2-4,8 FCC until 2010 to allow USA devices on Europe Market in 2006									

DRAFT for DECISSION , Still NOT FINAL

Draft Spectrum Mask in Europe (CEPT) (September 15, 2005) still under consideration • -41.3dBm/MHz if detection and avoidance for interference are used -20 • -70.0dBm/MHz otherwise

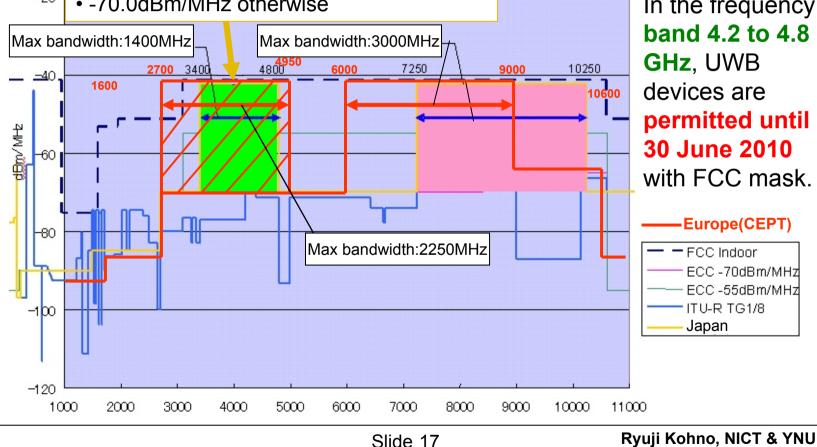

Issues for IEEE802.15.4a Corresponding to These Spectral Masks

- Although IEEE802.15.4a is primarily US standard, it should be world-wide compliant for a world trade.
- Specification in TG4a has been mostly decided and should be finalized as soon as possible within this year or before next March for marketing.
- The regulators need to know feasibility of implementing 3a & 4a devices compliant to the masks including DAA (Detection and Avoidance of inerference to 4G etc) before finalizing the regulation for UWB by the same deadline as well.
- What shall we modify specification to make it world-wide compliant?

What shall we modify 4a's specification to make it world-wide compliant?

Suggested minor modification in specification:

- Band plan: 3-5GHz with DAA, 6-10GHz without DA
- Modulation: Sequence, PRF, Pulse Shape, FEC
- MAC: Carrier and Energy Sensing for other radios
- Ranging: interference from coexisting radios
- CSS: compliance in 2.4GHz band
- Extra Functions: DAA

Suggested minor modification in specification (2/3)


- Band plan: 3-5GHz with DAA, 6-10GHz without DAA
 - 6-10GHz should be involved as well as 3-5GHz.
 - Common subbands allocation for European and Japanese masks as well as FCC's one.
- Modulation: Sequence, Pulse Shape, PRF, FEC
 - To shape UWB signal spectrum for avoiding interference to victim radios, e.g. 4G, sequence and pulse shape can be designed to make notches in spectral shape. PRF should be also high enough for low interference.
 - To protect UWB devices against interference from strong coexisting radios, e.g. 4G, FEC should be desined with enough error-correcting capability so as to match with error feasures like error burst statics. Super-orthogonal convolutional (SOC) codes with low encoding and decoding complexity and others are suggested.

Suggested minor modification in specification (3/3)

- MAC: carrier and energy sensing other radios as well
 - To achieve DAA adaptively, we need to sense a victim radio's signal like cognitive radio concept.
 - DAA needs modification MAC as well as PHY. CBP (Contention-Base Protocol) requested by FCC could be introduced to 4a as well.
- Ranging: interference from coexisting radios
 - Investigate ranging performance degradation due to interference from coexisting radios.
 - Make ranging more secure and robust against the interference.
- CSS: compliance in 2.4GHz band
- Extra Functions: DAA

Feasible Implementation of DAA for IEEE802.15.4a Adaptive interference avoiding techniques by SSA Soft-Spectrum Adaptation (SSA) Adaptive band eliminating filter Analog Implementation Digital Implementation or hybrid Adapative pulse shaping Pulse shaping by high-speed DAC Pulse shaping by combining an wavelet Ref. Modified pulse shapes based on SSA for interference mitigation and systems coexistence (update), Doc: IEEE 802,15-03-0457-00-003a Adaptive spreading sequence Spectrum null coding Ref. Alternative Spreading Code and Channel Code for IEEE802.15.4a, Doc: IEEE 802.15-05-0462-01-004a


<u>Global harmonization and compliance utilizing</u> <u>optimized SSA-UWB pulse wavelets</u>

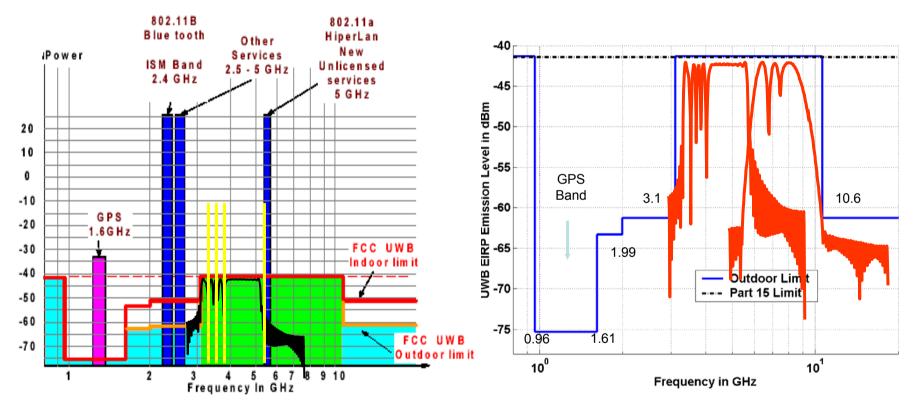

Ref. Modified pulse shapes based on SSA for interference mitigation and systems coexistence (update), Doc: IEEE 802.15-03-0457-00-003a

Slide 23

Optimized SSA-UWB pulse wavelet with adaptive spectral notches achieving coexistence, flexibility and efficient power transmission

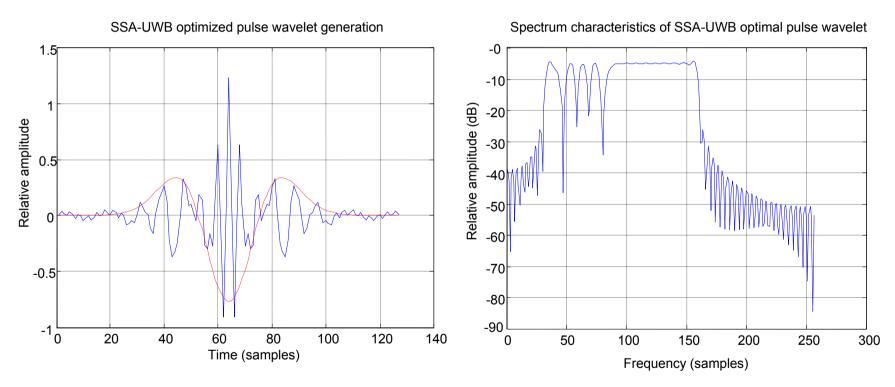

Ref. Modified pulse shapes based on SSA for interference mitigation and systems coexistence (update), Doc: IEEE 802.15-03-0457-00-003a


Slide 24

Matched spectral null coding

Case 0: [1 0 1 1 0 1] → [1 0 0 1 1 1 0 0 0 1 1 0]


Case 1: 4 successive bits are encoded into 1 symbol.

Case 2: 6 successive bits are encoded into 1 symbol.

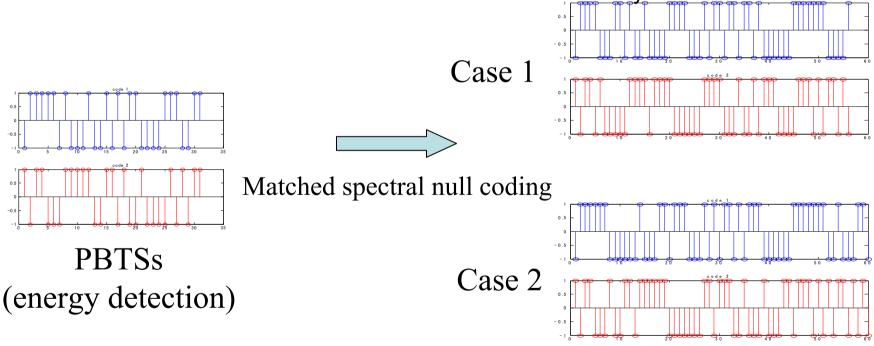

Ref. Alternative Spreading Code and Channel Code for IEEE802.15.4a, Doc: IEEE 802.15-05-0462-01-004a

Spectra of Matched spectral null coded PBTS

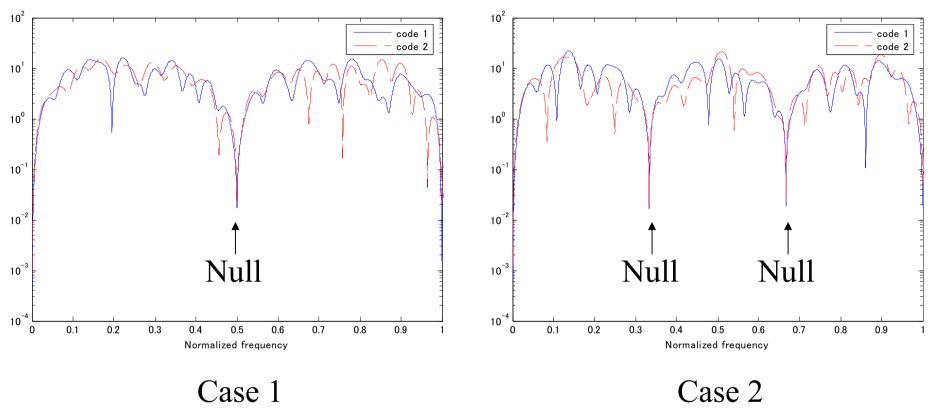

Ref. Alternative Spreading Code and Channel Code for IEEE802.15.4a, Doc: IEEE 802.15-05-0462-01-004a

Concluding Remark

- Although a global single regulation for UWB may not be agreed soon, UWB business will soon start or has already started if regional regulation is not much different. Regional and international consensus are important for a world trade.
- If DAA (detection and avoidance) of interference to coexisting systems is implemented with reasonable cost, then a lower band(3-5GHz) for UWB will be available. Otherwise, a higher band(7-10GHz) will be first applied. However, this is not the best solution but we need effort for a better solution.
- Manufactures developing both 4G and UWB systems should focus on reasonable solution to succeed both businesses while common carrier operators make better business model for integrated services of 4G and UWB.
- <u>IEEP802.15 can contribute a fewer spectral masks in a</u> world.