Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: [Comments for TRD input – Part 2]

Date Submitted: [13 May 2009]

Source: [Sridhar Rajagopal, Ying Li, Farooq Khan, Jae-seung Son, Taehan Bae, Eun Tae Won]

Company [Samsung Electronics] **Contact**: [sridhar.r@samsung.com]

Re: [TG7 Call For Contributions]

Abstract:[]

Purpose: [To provide comments to TRD document and trigger discussion with other group members of TG7]

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

Topics – Part 2

Ambient light tolerance

Security


Power consumption

QoS

Form factor

Complexity

Ambient Light Characteristics

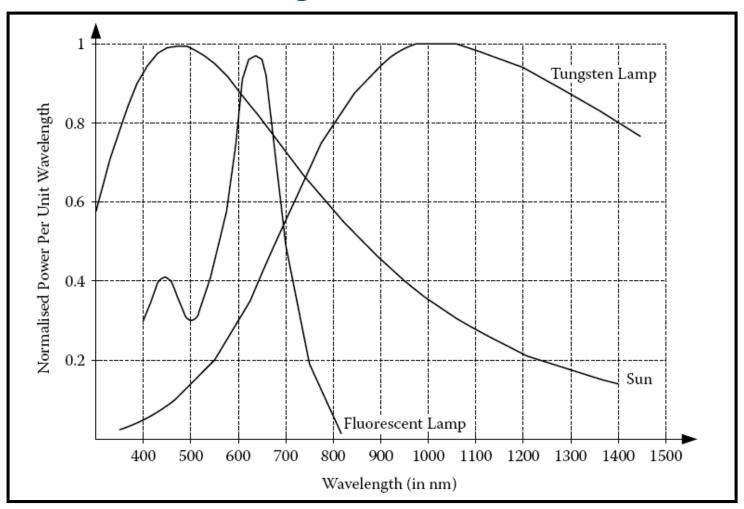

Source: Optical Wireless Communications: IR for Wireless Connectivity, R. Ramirez-Iniguez, CRC Press

Frequency selectivity for ambient light

Defining a frequency-selective or source-specific ambient light tolerance would make the TRD unnecessarily complicated

Recommend specify parameter that is not frequency-selective for ambient light tolerance

Recommend specify parameter that is not source-specific

Illuminance of typical light sources

Illuminance	Example		
10 ⁻⁵ lux	Light from Sirius, the brightest star in the night sky		
10 ⁻⁴ lux	Total starlight, overcast sky		
0.01 lux	Quarter moon		
0.2 lux	Design minimum for emergency lighting (AS2293).		
0.27 lux	Full moon on a clear night		
50 lux	Family living room		
100 lux	Very dark overcast day		
320 lux	Recommended office lighting (Australia)		
400 lux	Sunrise or sunset on a clear day. Well-lit office area.		
500 lux	Lighting level for an office according to the European law UNI EN 12464.		
1,000 lux	Overcast day - typical TV studio lighting		
10,000–25,000 lux	Full daylight (not direct sun)		
32,000–130,000 lux	Direct sunlight		

Source: http://en.wikipedia.org/wiki/Lux

Indoor vs. outdoor applications

Sunlight more relevant to outdoor applications

Artificial light more relevant to indoor applications

This could be used for separating requirements for indoor vs. outdoor light tolerance

Submission 6 <Samsung Electronics>

Other requirements

doc. : IEEE 802.15-09-0368-01-0007

Ambient light tolerance should be specified for light falling within the FOV of the receiver

Ambient light tolerance should be specified for the highest data rate sensitivity at a given range

• Interference would be more of the typical case of operation

Acceptable PER degradation for interference should be specified for highest data rate

Recommend PER degradation < 1 dB at 8% PER

Range between TX and RX for ambient light tolerance specified at 8% PER

Recommendation

Ambient Light	Minimum Tolerance		
	level		
	(lux)		
Outdoor	10000		
Indoor	500		

Matches typical indoor and outdoor illuminance levels

Verified with testing indoor and outdoor using a standard luxmeter.

Security requirements from PAR

Unique characteristic of visible light communication

- Purpose of Proposed Standard: ...
 - The standard will provide ... (iii) additional security by allowing the user to see the communication channel;
- Need for the project: ...
 - Thirdly, the unique feature of visibility can enhance the physical-layer security and offer intuitive usage. ... Potential application include secure point-to-point communication, ..., secure point-to-Multipoint communication ...



Security options for VLC

Consider data integrity, data authenticity and encryption

VLC is inherently safe due to WYSIWYT property. However, additional data confidentiality and authenticity mechanisms may be required for applications such as kiosk downloads

AES-128 symmetric-key cryptography algorithm can be considered for TRD

An approach similar to multi-level security in IEEE 802.15.4 can also be considered for TRD if different levels of security are desired for different services

Submission 10 <Samsung Electronics>



Power consumption

Power consumption may not be an issue for the infrastructure devices

However, mobile devices need to conserve battery power for longer standby times.

Recommend that TRD should support power saving mechanisms such as sleep modes, duty-cycle, power save modes

Proposals addressing power consumption requirements could also consider issues such as battery life, process technology use, supply voltage assumptions and average/peak power used.

Quality of Service (QoS)

Reliability and Latency


- Reliability: Appropriate error detection and correction methods, interference avoidance methods, or any other suitable techniques should be provided at PHY and MAC level
- Latency: Point-to-point delay and delay variation

Real-time, delay-sensitive information

- Real-time data should be delivered with limited delay (latency)
- Impact of delay on scheduling must be considered

TRD should support flexible QoS provisions such that they can be tailored to suit application needs.

QoS impact on MAC and PHY

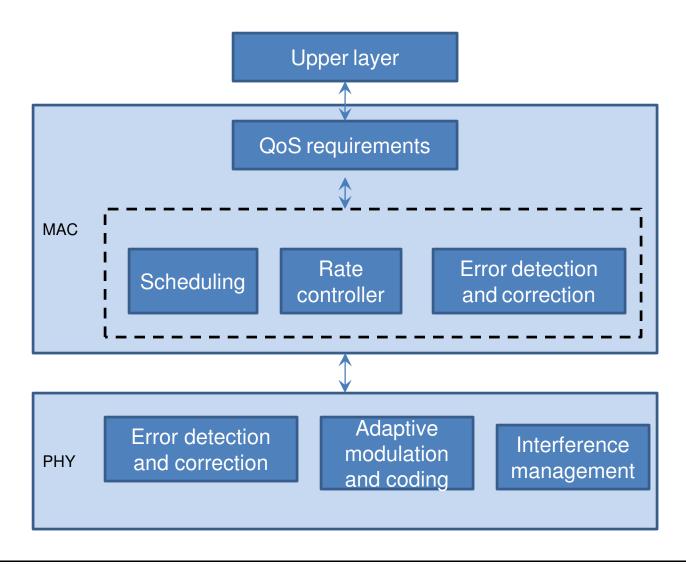

Example of QoS Requirement

Different applications have different requirement on rate, loss, and delay (latency).

TRD should support various applications with different QoS requirements.

	Application example	Rate at the Application Layer	Loss	Delay
Audio	music	Low	<3% FER	<150ms
Data	File download	High	Zero	Insensitive
	Delay-sensitive broadcast	Low-high	Zero	< 250ms
Multimedia	Videophone	Medium to High	<1% FER	< 150ms
	Online video / broadcasting	Medium to High	Some loss tolerant	Initial delay of a few seconds Small jitter

Form factor

Should be easy to integrate with existing dimmer and driver circuits for infrastructure

Should be able to integrate well with mobile phones

Submission 15 <Samsung Electronics>

Complexity

Low complexity to enable mass commercial adoption quickly

• Cell phones, displays, traffic lights,

Should be easy to manufacture for low cost

Should have ease of integration into existing/upcoming LED-based products

Gate count, die size, BOM should be minimized

Need for external components and circuits (such as drivers) and their complexity should be minimized

References

Optical Wireless Communications: IR for Wireless Connectivity, R. Ramirez-Iniguez, CRC Press

http://en.wikipedia.org/wiki/Lux

802.15.7 TG-VLC PAR IEEE P802.15-08-0656-01-0007

802.15.6 TG-BAN TRD IEEE P802.15-08-0644-09-0006