

Overview of IEEE 802.22 Standard on Wireless Regional Area Networks and Core Technologies

IEEE P802.22 Wireless RANs

Date: 2010-05-15

Authors:

Name	Company	Address	Phone	email
Apurva N. Mody	BAE Systems	P. O. Box 868, MER 15-2350, Nashua, NH 03061	1-404-819- 0314, 1-603- 885-2621	apurva.mody@baesystems.com , apurva_mody@yahoo.com
Gerald Chouinard	Communications Research Center, Canada		1-613-998- 2500	Gerald.chouinard@crc.ca

Notice: This document has been prepared to assist IEEE 802.22. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor grants a free, irrevocable license to the IEEE to incorporate material contained in this contribution, and any modifications thereof, in the creation of an IEEE Standards publication; to copyright in the IEEE's name any IEEE Standards publication even though it may include portions of this contribution; and at the IEEE's sole discretion to permit others to reproduce in whole or in part the resulting IEEE Standards publication. The contributor also acknowledges and accepts that this contribution may be made public by IEEE 802.22.

Patent Policy and Procedures: The contributor is familiar with the IEEE 802 Patent Policy and Procedures <http://standards.ieee.org/guides/bylaws/sb-bylaws.pdf> including the statement "IEEE standards may include the known use of patent(s), including patent applications, provided the IEEE receives assurance from the patent holder or applicant with respect to patents essential for compliance with both mandatory and optional portions of the standard." Early disclosure to the Working Group of patent information that might be relevant to the standard is essential to reduce the possibility for delays in the development process and increase the likelihood that the draft publication will be approved for publication. Please notify the Chair **Apurva N. Mody** <apurva.mody@ieee.org> as early as possible, in written or electronic form, if patented technology (or technology under patent application) might be incorporated into a draft standard being developed within the IEEE 802.22 Working Group. **If you have questions, contact the IEEE Patent Committee Administrator at patcom@iee.org.**


>

Outline

- **IEEE 802.22 Standard Overview**
 - Overview of the IEEE 802.22
 - CONOPS
 - Reference Architecture
 - Frame Structure
 - PHY
 - MAC
 - Cognitive Radio Capabilities
 - Spectrum Sensing
 - Geo-location
 - Interface to Incumbent Database Service
 - Security


Overview of the IEEE 802.22 Standard

- **Core Technology** - Cognitive radio technology based un-licensed use, primarily designed to operate in the TV Whitespaces from 54-862 MHz, on a non-interfering basis with the primary users (incumbents).
- **Representation** – Commercial industry, Broadcasters, Govt., regulators, and Academia
- **Membership** – 40 on an average
- **Projects** – IEEE 802.22, IEEE 802.22.1, IEEE 802.22.1
- **CONOPS** - VHF and UHF band operation allows long range propagation and cell radius of 17 – 33 km. Approx 280 MHz of Bandwidth with 47 TV channels.
- **PHY** - Optimized for long channel response times and highly frequency selective fading channels.
- **MAC** – Provides compensation for long round trip delays
- **Unique features** introduced for Cognitive Radio based operation: spectrum sensing, spectrum management, intra-system co-existence, geo-location and security

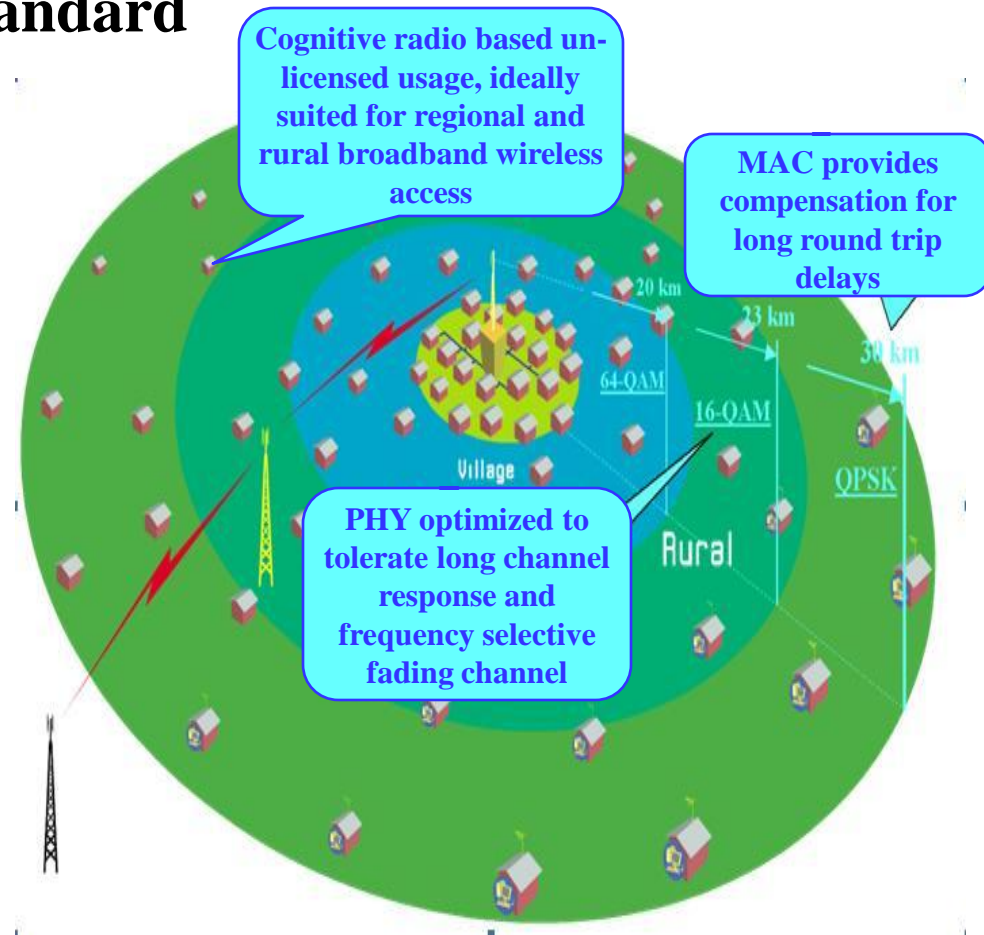


- **Mobility and Portability** - Current version of 802.22 (as defined by the project authorization and likely regulatory rules) does not allow mobility, but it will allow portability (nomadic use). In case the rules do change, IEEE 802.22 PHY is designed to support mobility of up to 114 km/ hr.

IEEE 802.22 CONOPS

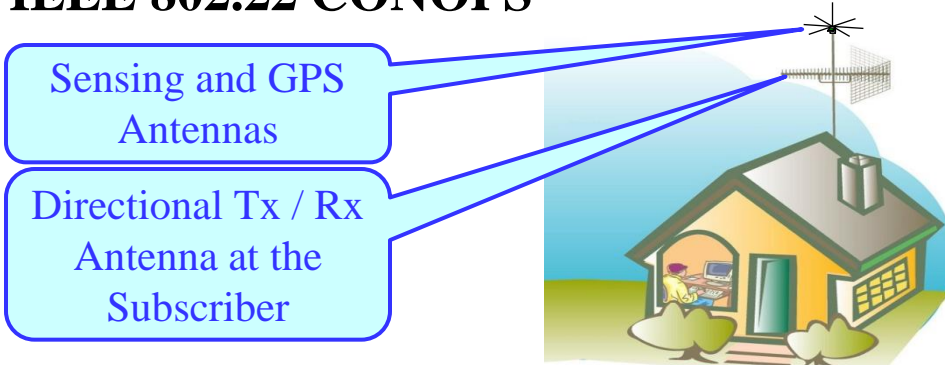


- **Operation** in the VHF / UHF Bands. Frequency Allocation for the United States – 54 – 60, 76 – 88, 174 – 216, 470 - 608 and 614 – 698 MHz => **Total of 282 MHz or 47 Channels**
- **Network Topology** – Point to Multi-point (PMP)
- **Max EIRP and Cell Radius** – (For 4W EIRP, Cell Radius 17 km), (For 100W EIRP, Cell Radius 30 km).
- **Tx / Rx antenna** – BS uses sectorized or omni-directional antenna. At the subscriber Tx /Rx antenna is directional with 14 dB of front to back lobe suppression,
- FCC R&O, BS Antenna height <= 30m, Subscriber Antenna = 10m (typical), but up to 30m allowed in the US.
- **Sensing antenna** requires isotropic (at least horizontal and vertical polarization) sensitivities to sense TV and microphone signals..
- **Geo-location** - GPS based geo-location is mandatory, but terrestrial geo-location (triangulation) is supported.





IEEE 802.22 Cognitive Node: Reference Architecture

- The proposed Protocol Reference Model (PRM) separates the Cognitive Plane from the Data, Control and Management planes



IEEE 802.22 – Frame Structure


- 802.22 supports **Time Division Duplex (TDD)** frame structure
- **Super-frame: 160 ms, Frame: 10 ms**
 - Each frame consists of **downlink (DL) sub-frame, uplink (UL) sub-frame, and the Co-existence Beacon Protocol (CBP) burst**
 - Lengths of DL and UL sub-frames can be adjusted .
- **Self Co-existence Window: BS** commands subscribers to send out CBPs for 802.22
 - self co-existence – CBP bursts contain information about the backup channel sets and sensing times
 - terrestrial geo-location and
 - whitespace device identification as required by the regulatory domain rules.

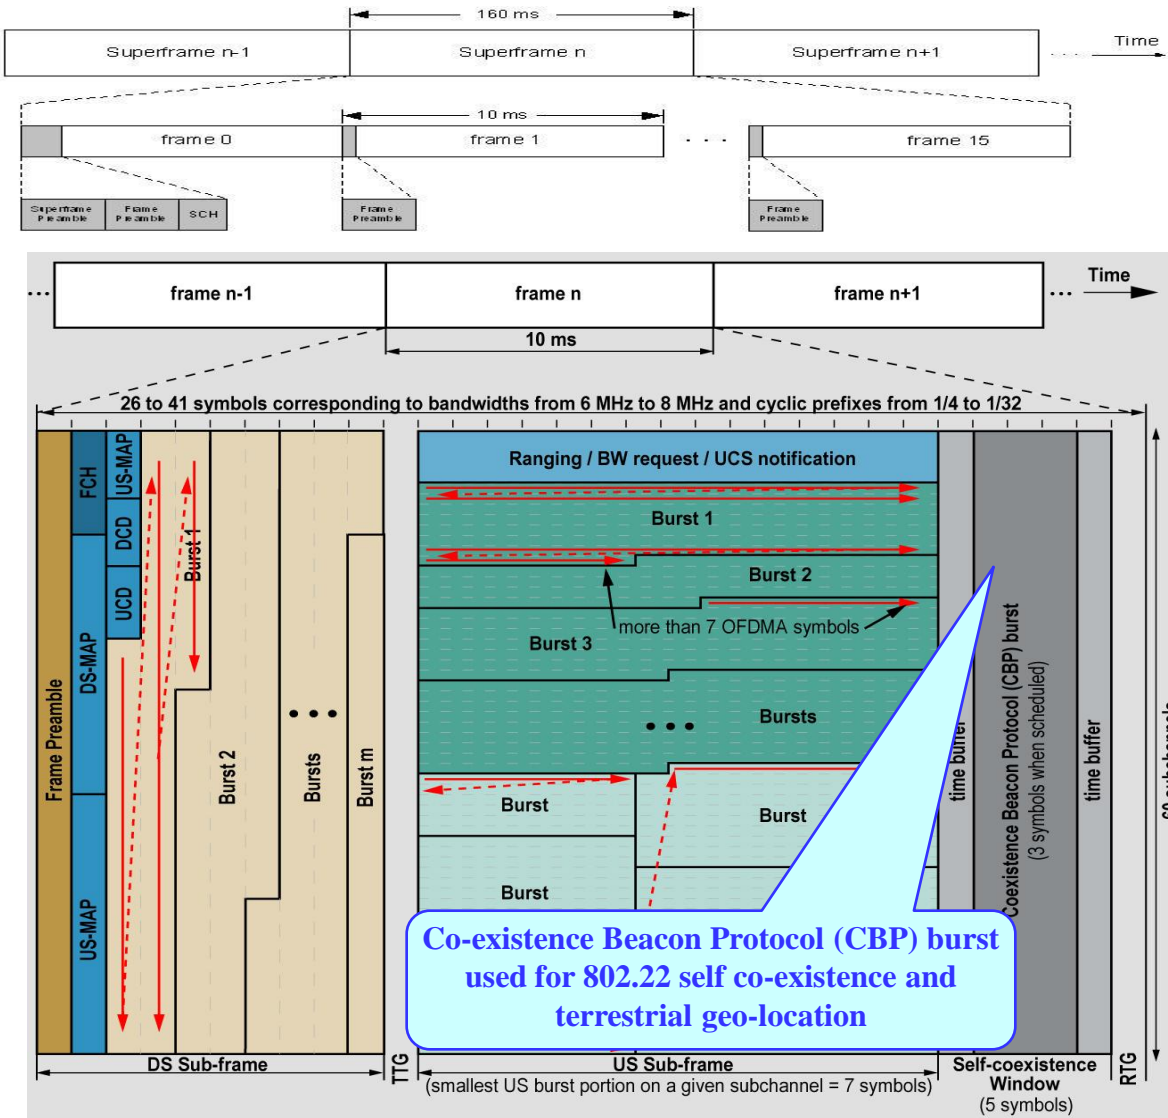

IEEE 802.22 – PHY Features

- PHY Transport** - 802.22 uses Orthogonal Frequency Division Multiplexing (OFDM) as transport mechanism. Orthogonal Frequency Division Multiple Access (OFDMA) is used in the UL
- Modulation** - QPSK, 16-QAM and 64-QAM supported
- Coding** – Convolutional Code is Mandatory. Turbo, LDPC or Shortened Block Turbo Code are Optional but recommended.
- Pilot Pattern** - Each OFDM / OFDMA symbol is divided into sub-channels of 28 sub-carriers of which 4 are pilots. Pilot symbols are inserted once every 7 sub-carriers. Pilots cycle through all 7 sub-carriers over 7 symbol duration. No frequency domain interpolation is required.
- Net Spectral Efficiency** - 0.624 bits/s/Hz – 3.12 bits/s/Hz
- Spectral Mask** - 802.22 has adopted the Spectral Mask requirements proposed by FCC. (200 tap FIR filter may be needed for implementation).

TV channel bandwidth (MHz)	6	7	8
Total number of subcarriers, N_{FFT}	2048		
Number of guard subcarriers, N_G (L, DC, R)	368 (184, 1, 183)		
Number of used subcarriers, $N_T = N_D + N_P$	1680		
Number of data subcarriers, N_D	1440		
Number of pilot subcarriers, N_P	240		
Signal bandwidth (MHz)	5.6240625	6.5625	7.494375



PHY capacity		Mbit/s	bit/(s*Hz)
Mod.	Rate	CP= 1/8	
QPSK	1/2	3.74	0.624
	2/3	4.99	0.832
	3/4	5.62	0.936
	5/6	6.24	1.04
16QAM	1/2	7.49	1.248
	2/3	9.98	1.664
	3/4	11.23	1.872
	5/6	12.48	2.08
64QAM	1/2	11.23	1.872
	2/3	14.98	2.496
	3/4	16.85	2.808
	5/6	18.72	3.12


PHY performance: SNR (dB)

Mod.	Rate	SNR
QPSK	1/2	4.3
	2/3	6.1
	3/4	7.1
	5/6	8.1
16QAM	1/2	10.2
	2/3	12.4
	3/4	13.5
	5/6	14.8
64QAM	1/2	15.6
	2/3	18.3
	3/4	19.7
	5/6	20.9


Note: includes phase noise: -80dBc/Hz at 1 kHz and 10 kHz and -105 dBc/Hz at 100 kHz

IEEE 802.22 – MAC Features

- **Connection-oriented MAC**, establishes connection IDs and service flows which are dynamically created
- **QoS** – Various types of QoS services are supported (See below). ARQ supported. Uni-cast, Multi-cast and broadcast services are supported.
- **Cognitive functionality** –
 - **Dynamic and adaptive scheduling of quiet periods** to allow the system to balance QoS requirements of users with the need to quiet down the network to support spectrum sensing. Quiet periods range from 1 symbol (approx. 1/3 ms) to one super-frame
 - **Subscribers can alert the BS, the presence of incumbents** in a number of ways. Dedicated - Urgent Co-existence Situation (UCS) messages or low priority MAC messages
 - **BS can ask one or more subscribers to move to another channel** in a number of ways using Frame Control Header (FCH) or dedicated MAC messages










Intra-frame quiet period scheduling

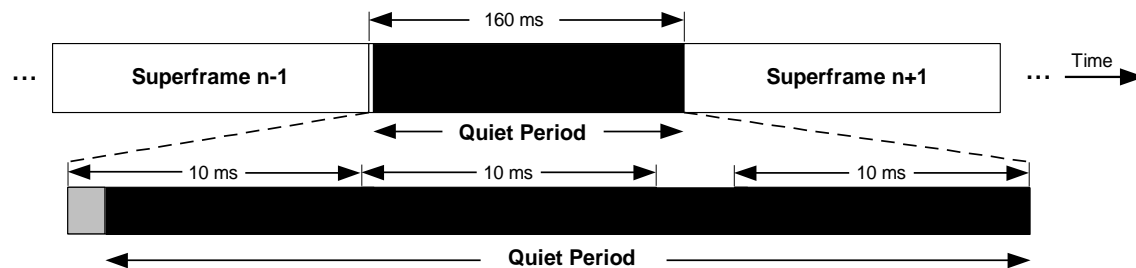

Inter frame quiet period scheduling

QoS	Application
UGS	VoIP, T1 / E1
rtPS	MPEG video streaming
nrtPS	FTP
BE	E-mail
Contention	BW request etc.

IEEE 802.22 – Cognitive Radio Capability



IEEE 802.22 – Spectrum Sensing


TV and Wireless Microphone Protection Using Spectrum Sensing

- FCC R&O requires
 - DTV protection at -114 dBm in 6 MHz of bandwidth. This amounts to an SNR of -19 dB for equivalent receiver noise of 11 dB
 - Wireless microphone protection at -114 dBm in 200 kHz bandwidth. This amounts to an SNR of -3 dB for eq. rec. noise of 11 dB.
- Several signal specific and blind feature based sensing schemes have been proposed.
 - Spectral correlation based sensing, Time domain cyclostationarity, Eigen value based sensing, FFT – based pilot sensing, Higher order statistics based sensing


Wireless Microphone Protection Using Beacon

- Many studies have suggested that FCC R&O target for wireless microphones is not sufficient to protect wearable microphones. (where **body attenuation of as much as 27dB** is possible)
- 802.22 has designed a beacon signal which will be transmitted from wireless microphone base stations with 250 mW EIRP (as compared to 50 mW EIRP of microphones). These beacon signals consist of repeated pseudo noise (PN) sequences and occupy a bandwidth of approximately 78 kHz.
- Security features are provided for beacon authentication

DTV Detection Results based Cyclostationary Feature Detection



Wireless Microphone Beacon Sensing Results





IEEE 802.22 – Geo-location

Satellite-based geo-location

- Requires GPS antenna at each terminal
- NMEA 0183 data string used to report to BS
- Poor accuracy in Northern hemispheres.

Terrestrially-based geo-location:

- A new scheme has been proposed requiring no additional hardware and using the characteristics and capabilities of the 802.22 standard.
- **Normal BS-CPE ranging process:** provides coarse ranging to an accuracy of 147.8 ns (44.3 m)
- **Extended BS-CPE ranging process:** augments the accuracy of the ranging process to 1 ns (0.3 m) by a more accurate scheme using the complex channel impulse response received at the CPE (Vernier-1) and at the BS (Vernier-2)
- **Extended CPE-CPE ranging process:** new scheme using the preamble of the CBP burst transmitted by a CPE and captured by another CPE in the surrounding area to acquire the distance between CPEs with a high level of accuracy (Vernier-3)
- **Off-line geo-location calculation:** All the information acquired at the CPEs is transmitted to the BS which can delegate the calculation of the CPE geo-location to a server. Calculation is based on usual triangulation using some CPEs as waypoints.

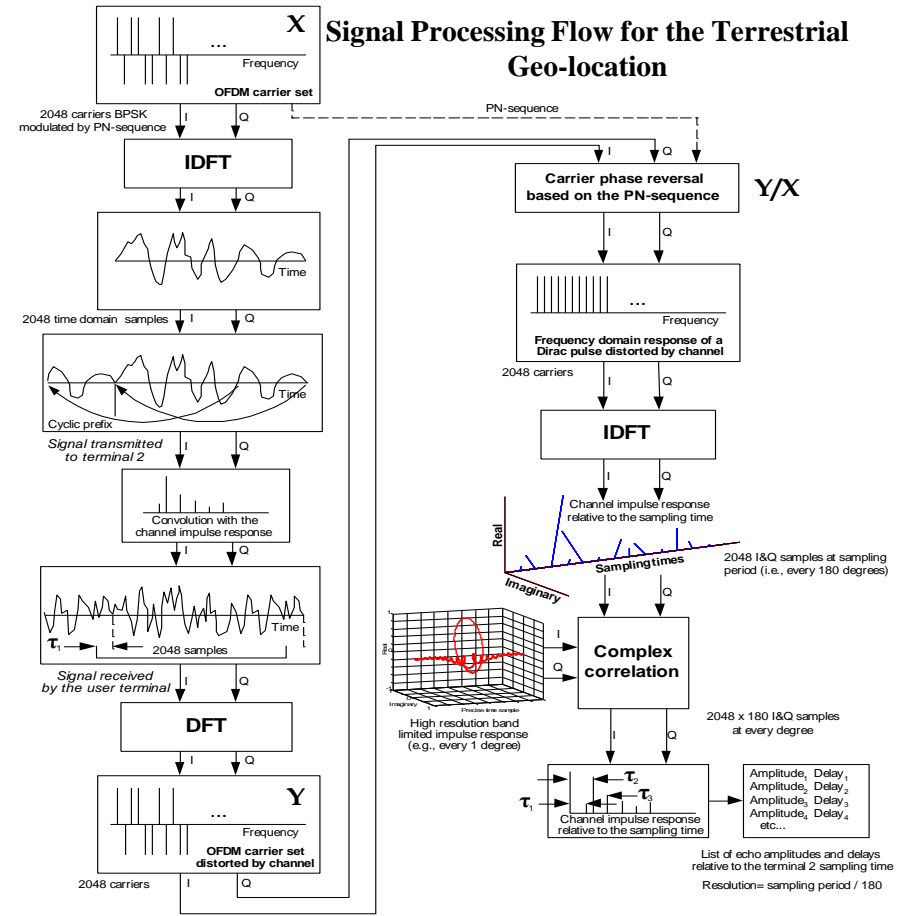


IEEE 802.22 – Self Co-existence

Spectrum Etiquette
(Enough channels available)


Requires that information on operating, backup and candidate channels of each cell is shared amongst WRAN cells: exchanged by CBP bursts.

On Demand Frame Contention
(Two or more cells need to co-exist on the same channel)




Primary user appears

Number x – represents operating channel
 Number y – represents backup channel
 Number z (double underline) – represents candidate channel





Self-coexistence window (SCW) does not have to be allocated at each frame.

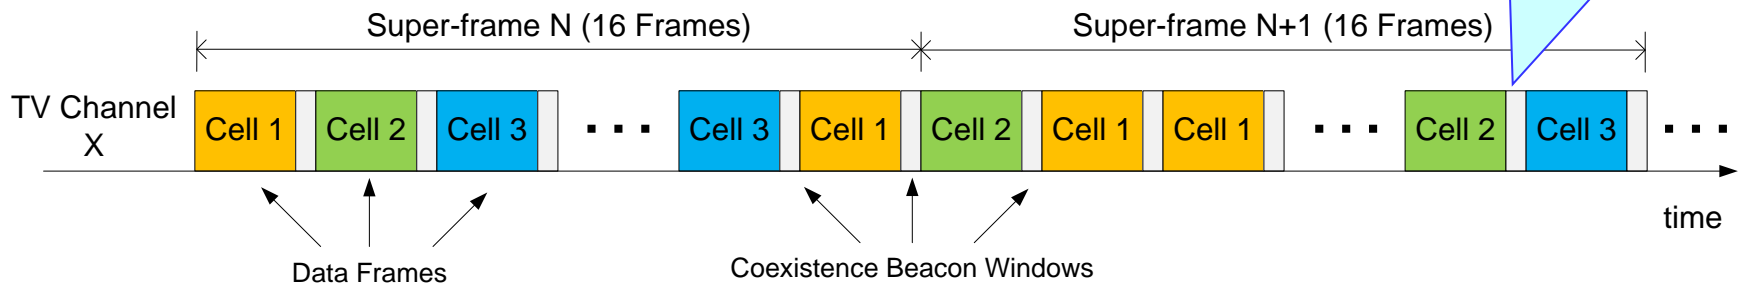



IEEE 802.22 – Security Sub-layer 1 (Non-Cognitive)

- **Confidentiality and Privacy** – AES (128) GCM is used for encryption and authentication
- **Network Authorization** - RSA and ECC based X.509 certificates are used for mutual authentication / network entry authorization.
- **Integrity** – AES-GCM is used to compute Integrity Check Vector (ICV). PN sequence numbers are appended to each packet.
- **Authentication** – Signals such as wireless microphone beacon and CBP are authenticated using ECC based digital signatures. No encryption is provided for these packets
- **Key Management** - Secure Control and Management Protocol is used for key management.
- **Management Messages** – All management messages except for the broadcast, initial ranging and basic CID are protected.
- **Device Security** - Trusted Computing Group, Trusted Platform Module specifications are recommended to enable **tamper-proof capability** for hardware and software.

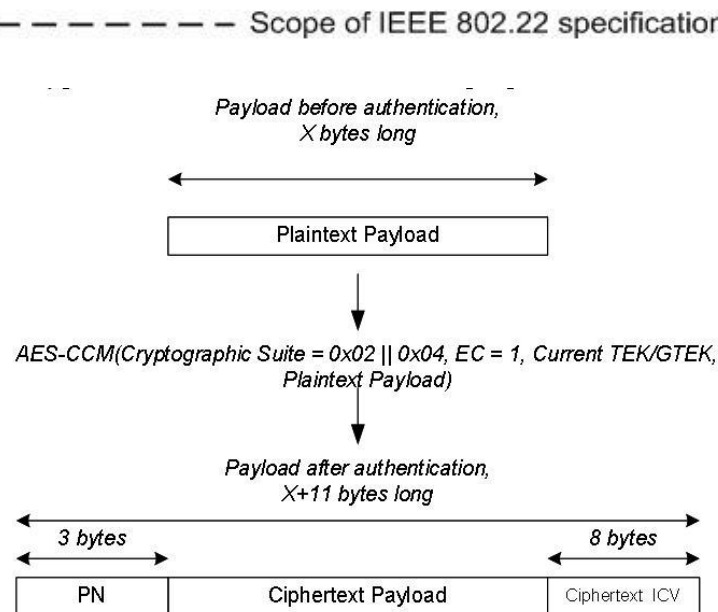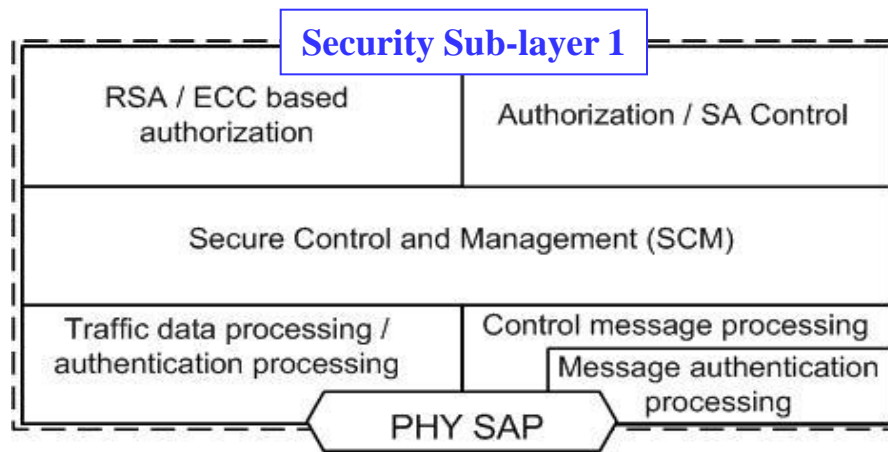

IEEE 802.22 – Security Sub-layer 2 (Cognitive)

- **Spectrum Availability** -
 - **Spectrum Sensing** used to ensure spectrum availability for primary users.
 - Various types of **signal specific and feature based sensing algorithms** have been included into the standard
 - Standard recommends sensing algorithms to determine the signal type (**Signal Classification**)
 - **Collaborative Sensing** - The group in general thinks that collaborative sensing will be useful. FCC R&O requires ‘OR’ rule based collaborative sensing.
 - **Correlation with Geo-location Information** – Closely tied to collaborative sensing. It tries to cross check the spectral footprint of the detected signal based on location of the sensor
- **Spectrum Access Authorization** –
 - **BS is capable of de-authorizing a subscriber** at any time. Sensing and incumbent database service used for spectrum access authorization
 - **Capability Check** – The Spectrum Manager (SM) is capable of prohibiting a subscriber from registering if it does not have adequate sensing capabilities.
- **Radio Behavior Control**
 - IEEE 802.22 is **policy driven**. Policies are rule-based.

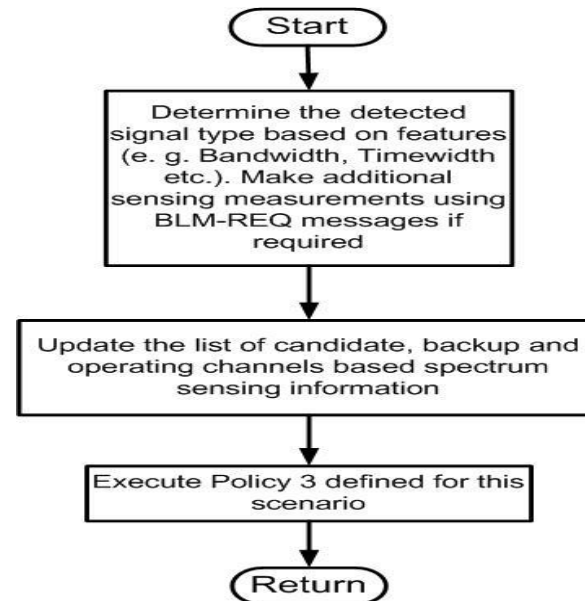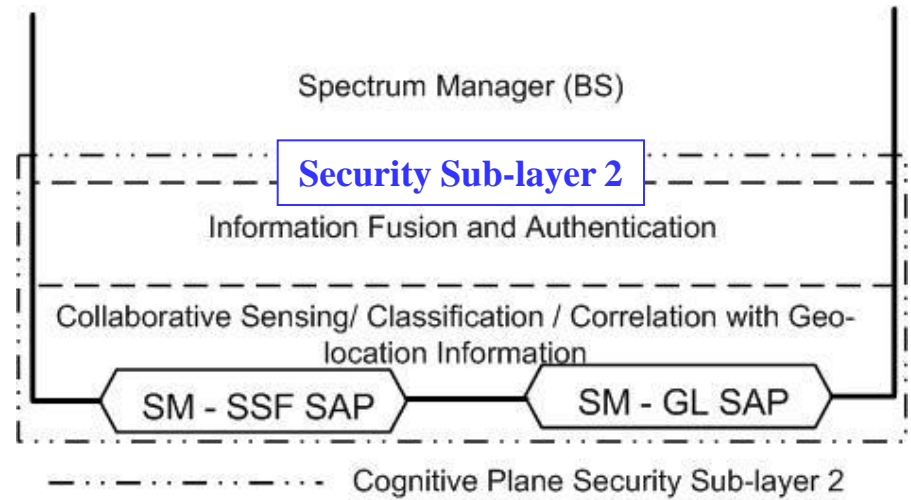

Signal classification and policy based behavior control of the 802.22 devices

References

- Gerald Chouinard, Communications Research Center, 802.22 Overview presentation to the 802 Whitespaces Study Group <https://mentor.ieee.org/802-sg-whitespace/dcn/09/sg-whitespace-09-0058-00-0000-802-22-presentation-to-ecsg.ppt>
- IEEE 802.22 Draftv3.0 – Members only Documents of the IEEE 802.22 Working Group (www.ieee802.org/22)
- Other Contributions to the IEEE 802.22 Standard (www.ieee802.org/22)