

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: Stochastic Modeling of Scattered Multipath Clusters in THz Indoor Communication Channels

Date Submitted: 19 July, 2011

Source: Sebastian Priebe, Technische Universität Braunschweig

Address: Schleinitzstraße 22, D-38092 Braunschweig, Germany

Voice: +49-531-391-2417, FAX: +49-531-391-5192, E-Mail: priebe@ifn.ing.tu-bs.de

Re: doc.: IEEE 802.15-15-11-0146-00-0thz_diffuse-rough-surface-scattering-analysis

Abstract: Ray tracing in combination with analytical rough surface scattering models is well suited to determine broadband channel characteristics at THz frequencies. Due to the high computational complexity, however, ray tracing cannot be applied reasonably to generate channel realizations for communication system simulations. Hence, a stochastic abstract model is introduced to randomize angle of arrival/departure, time of arrival and amplitude of scattered multipath clusters in indoor environments.

Purpose: Input for THz channel modeling

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

Stochastic Modeling of Scattered Multipath Clusters in THz Indoor Communication Channels

Sebastian Priebe¹, Martin Jacob¹, Thomas Kürner¹

¹ Institut für Nachrichtentechnik, Technische Universität Braunschweig, Germany

Outline

1. Introduction


2. The Investigated Scenario

3. Modeling of Multipath Clusters

4. Summary/Outlook

Introduction (1)


- Rough surface scattering:
 - has a high impact on THz indoor communication channels
 - can be modeled with the Kirchhoff scattering theory for typical building materials like plaster

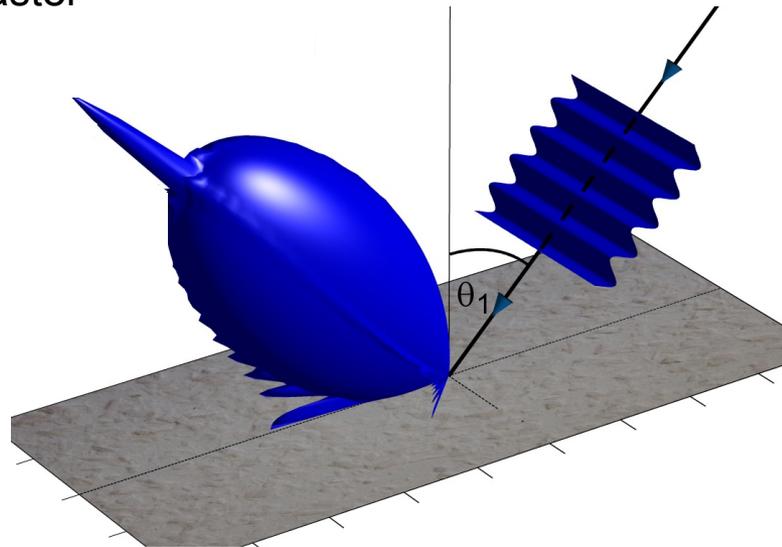

→ Characteristics of scattered rays like angle of arrival (AoA)/ departure (AoD) and time of arrival (ToA) must be known for channel modeling

Introduction (2)

- Scattering has been implemented into ray tracing
- All ray characteristics can be determined

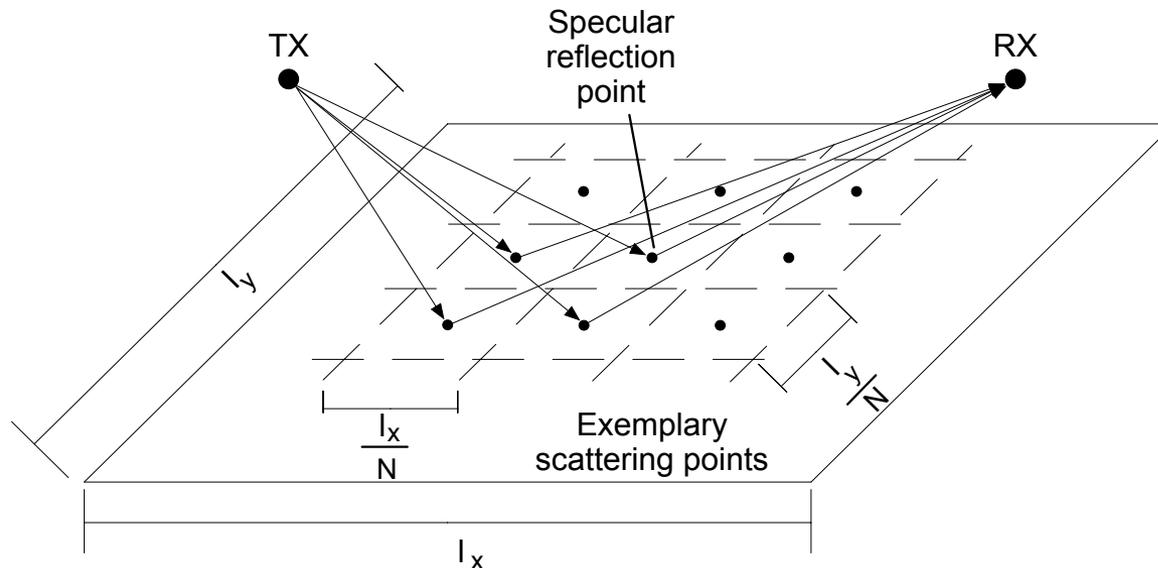


- Drawback: Very high computational time, **unsuitable for fast system simulations**
- Solution: **Abstract stochastic model** for the generation of channel realizations including AoA, AoD, amplitudes, ToA, phase

Outline

1. Introduction
- 2. The Investigated Scenario**
 - **Office Room Setup**
 - **Exemplary Angular Power Profiles**
3. Modeling of Multipath Clusters
4. Summary/Outlook

Office Room Setup



- Connection of a **nomadic device to an access point**
- TX at a height of 2.3 m, RX at 0.75 m, room height of 2.5 m
- Ray tracing simulations: **220 equidistant receiver positions distributed in the whole room** with ≈ 11000 simulated rays each
- Omnidirectional antennas, horizontal polarization
- Frequency: $f = 300$ GHz

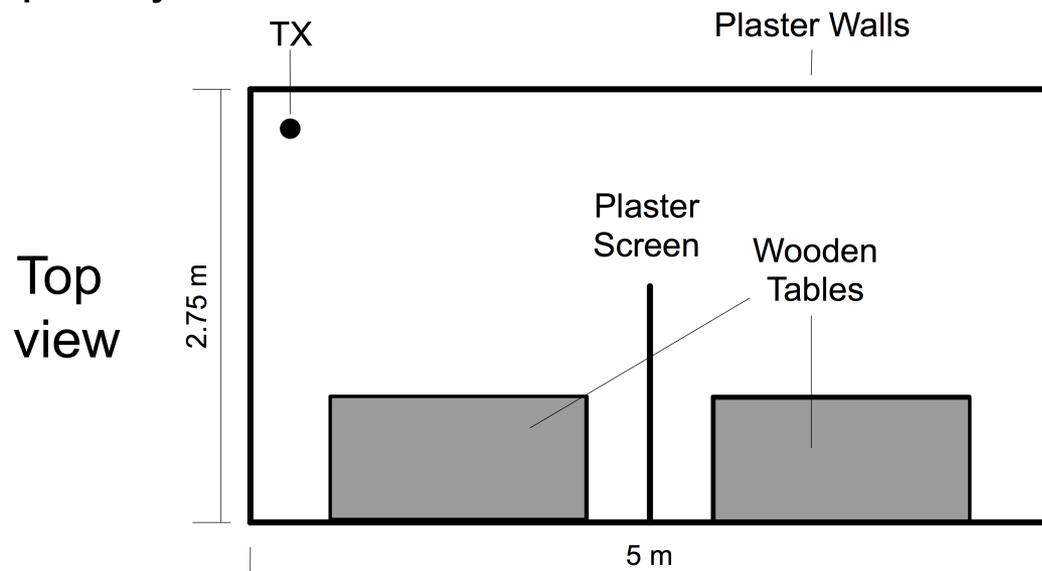

cf. IEEE document
802.15-15-11-0146-00-0thz

Exemplary Angular Power Profiles (1)



- Exemplary simulated power profile in the AoA domain:

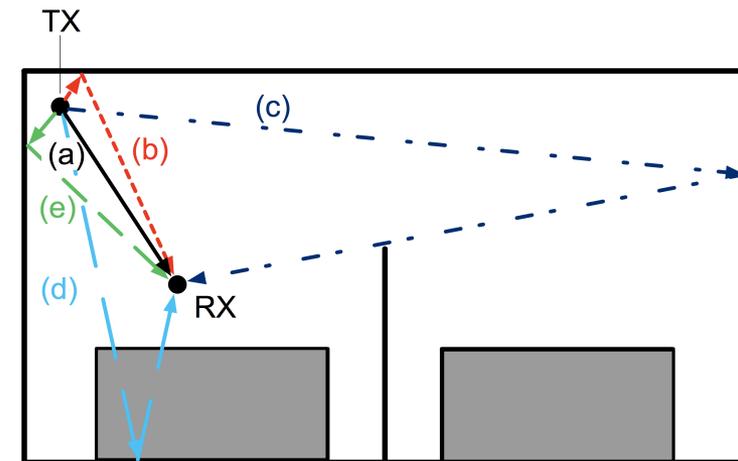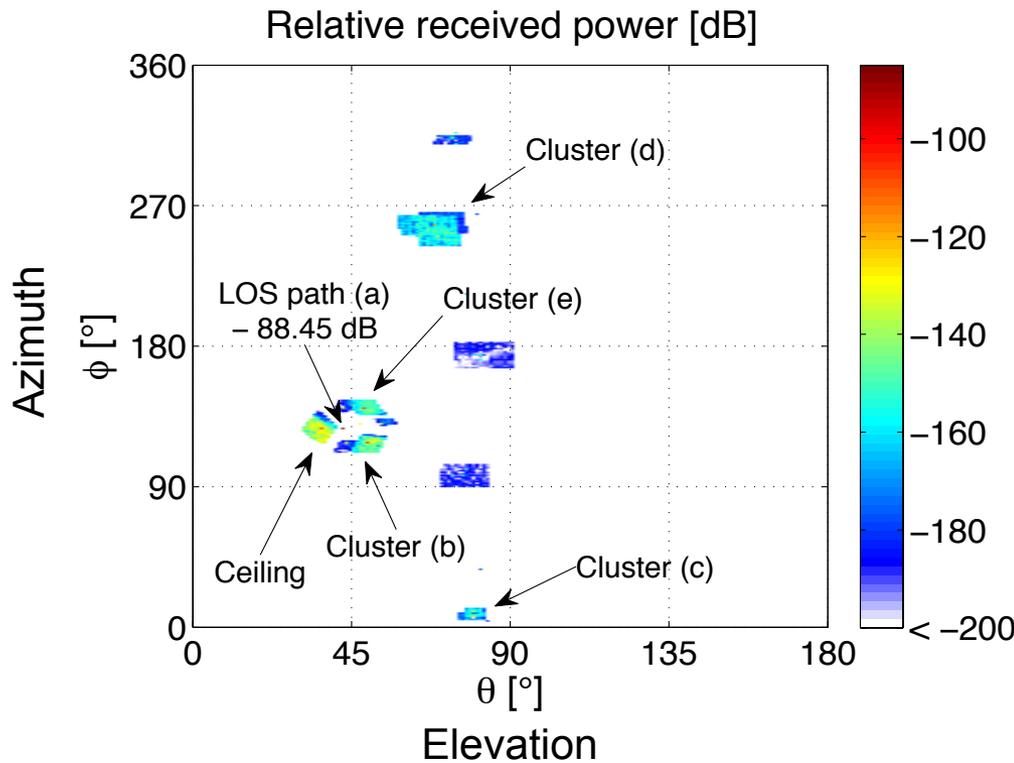

→ Multipath components (MPCs) show a **clustered behavior**

Exemplary Angular Power Profiles (2)


- AoD domain:

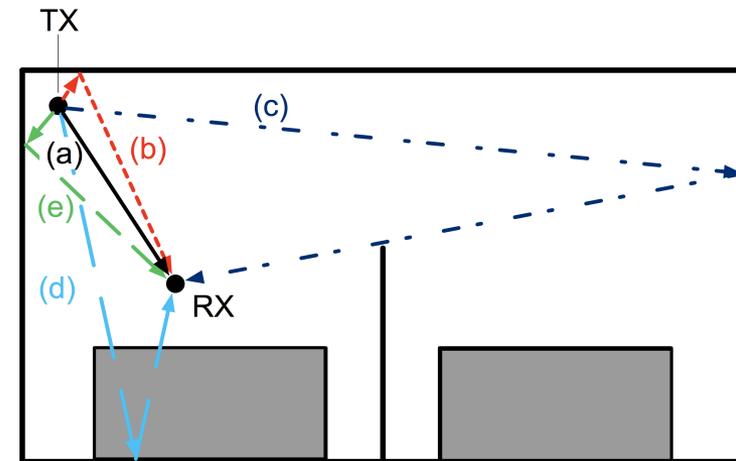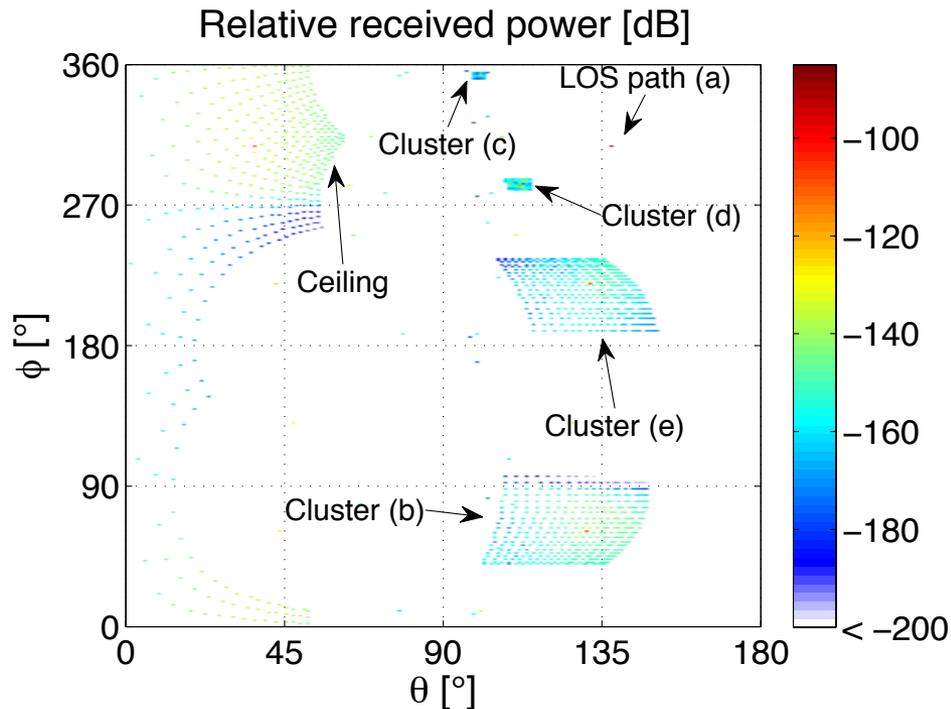

- Clustered behavior also for the AoD
- Surface discretization visible
- Problem: Very high computational time

Exemplary Angular Power Profiles (3)

- Azimuth angular power profile, AoA:

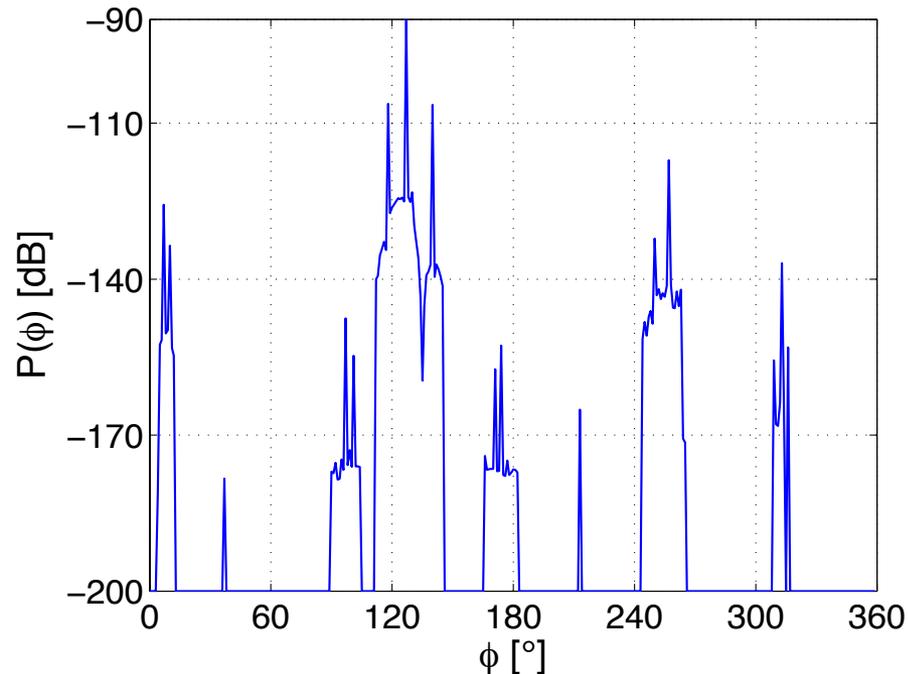

- Power summed up in the elevation for each azimuth angle
- Sharp spikes due to specular reflections in every cluster
- Modeling of **cluster behavior with reference to the specular reflection**


Outline

1. Introduction
2. The Investigated Scenario
- 3. Modeling of Multipath Clusters**
 - **Modeling Approach**
 - **Angle of Arrival/Departure**
 - **Angular Power Profiles**
 - **Time of Arrival**
 - **Phase**
 - **Generated Impulse Response/Transfer Function**
4. Summary/Outlook

Modeling Approach (1)

- Idea:
 - Modeling of **relative characteristics** of scattered multipath components **with respect to specular reflections for each cluster**
 - Determination of statistics from ray tracing
 - Angles of arrival/departure
 - Amplitude
 - Time of arrival
 - Phase
 - Randomization of channel realizations based on **known specular components**


Modeling Approach (2)

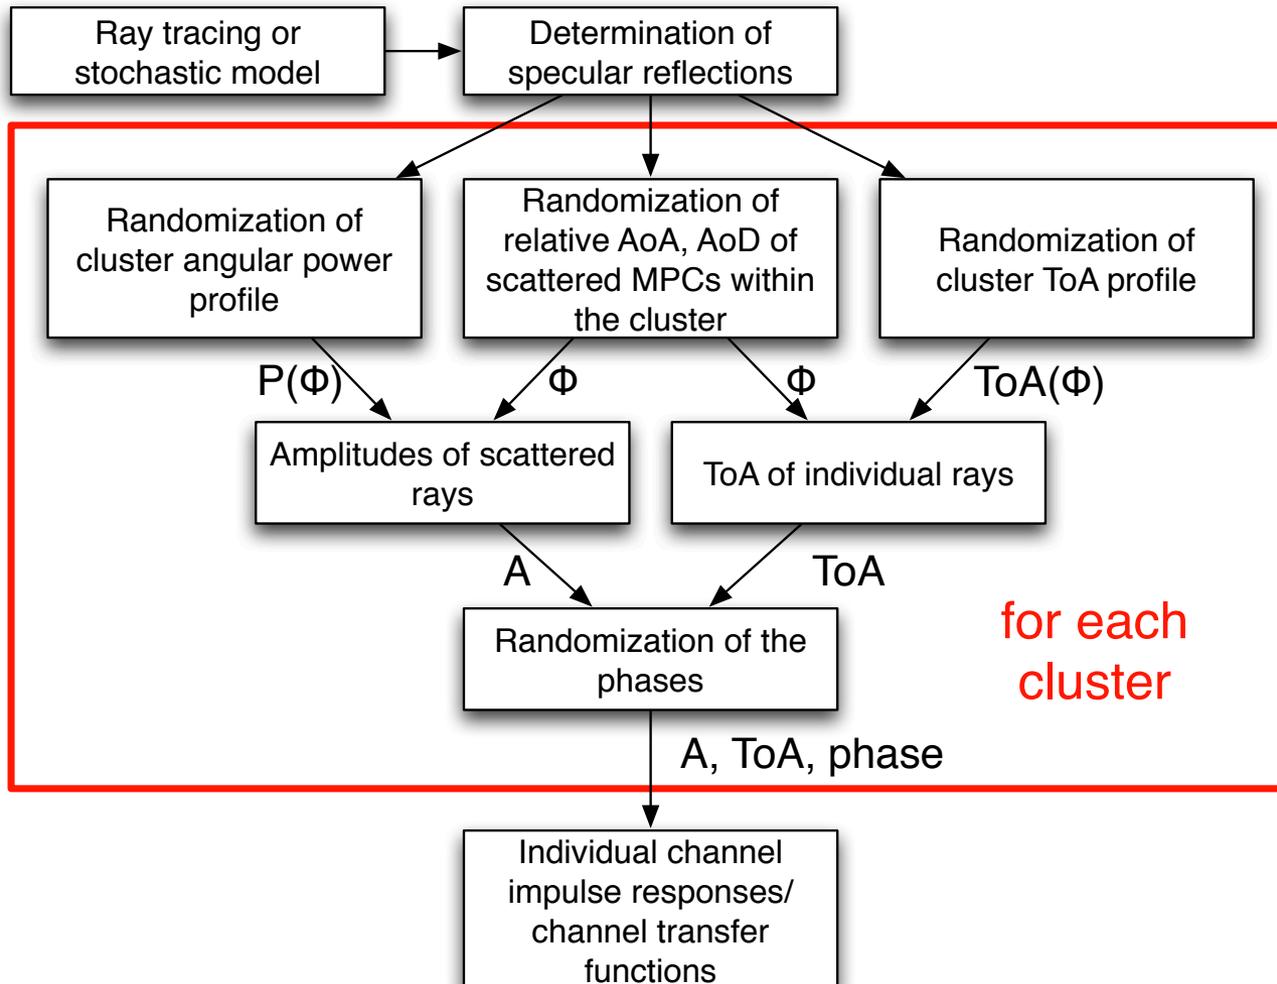

Modeling Approach (3)



- Main advantages:
 1. Only **computationally inextensive** determination of specular reflections must be performed
 2. **Physically motivated** model: angular dependence of scattering is used as the basis to determine amplitude and ToA of MPCs
 3. All information necessary for **broadband channel generations** is included
 4. A **fast generation** of channel realizations can be achieved
 5. Consideration of realistic antenna diagrams can be done during post processing

Angle of Arrival/Departure (1)

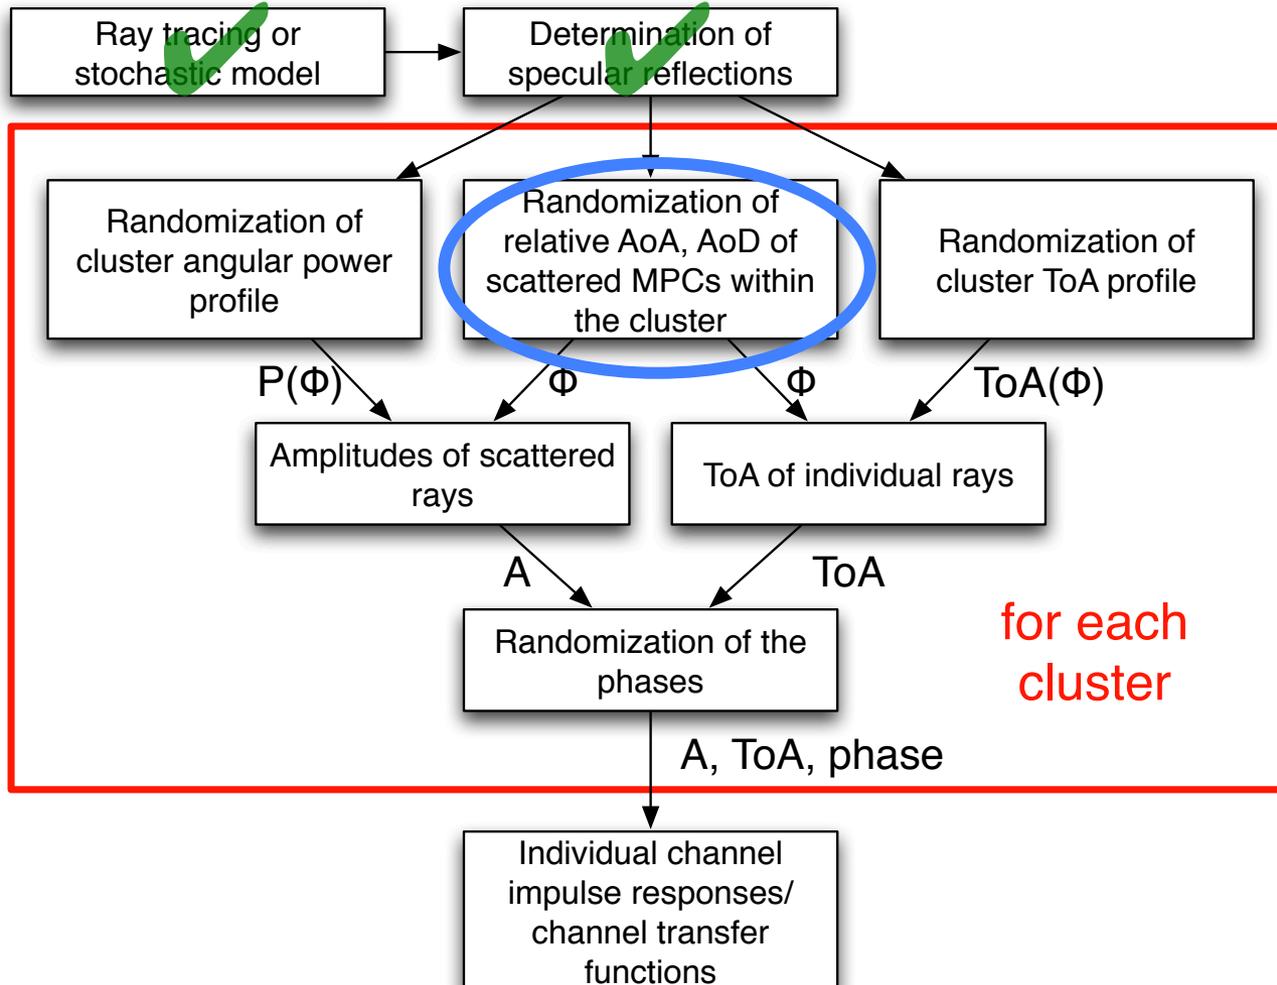


Angle of Arrival/Departure (2)

- Derivation of probability density functions (PDFs) for the **relative AoAs** of scattered MPCs
- Consideration of each cluster at each of the 220 RX position in the room
- Measured **with respect to the specular direction** of the cluster

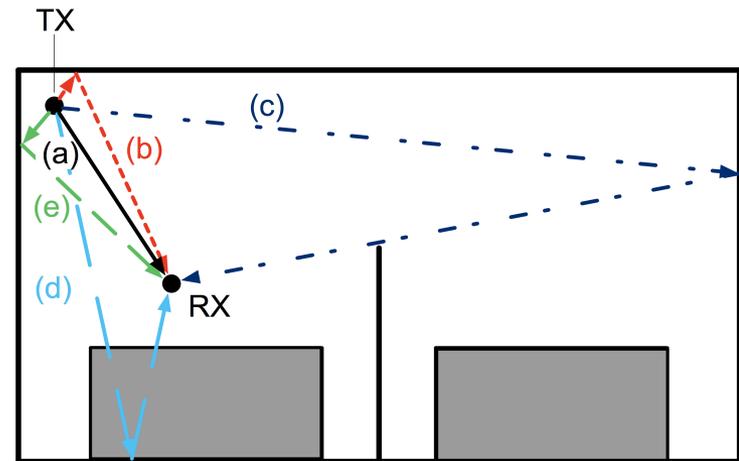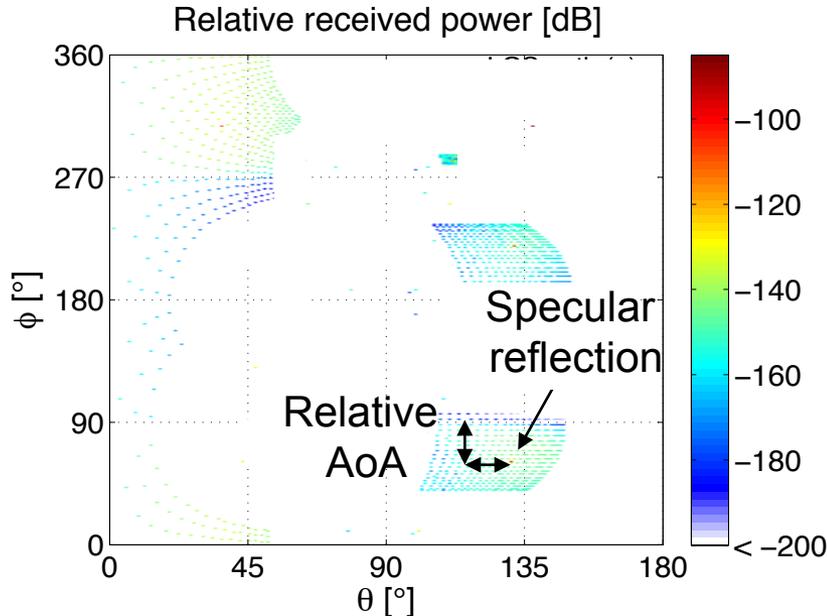

Angle of Arrival/Departure (3)


- PDFs for the relative AoA:

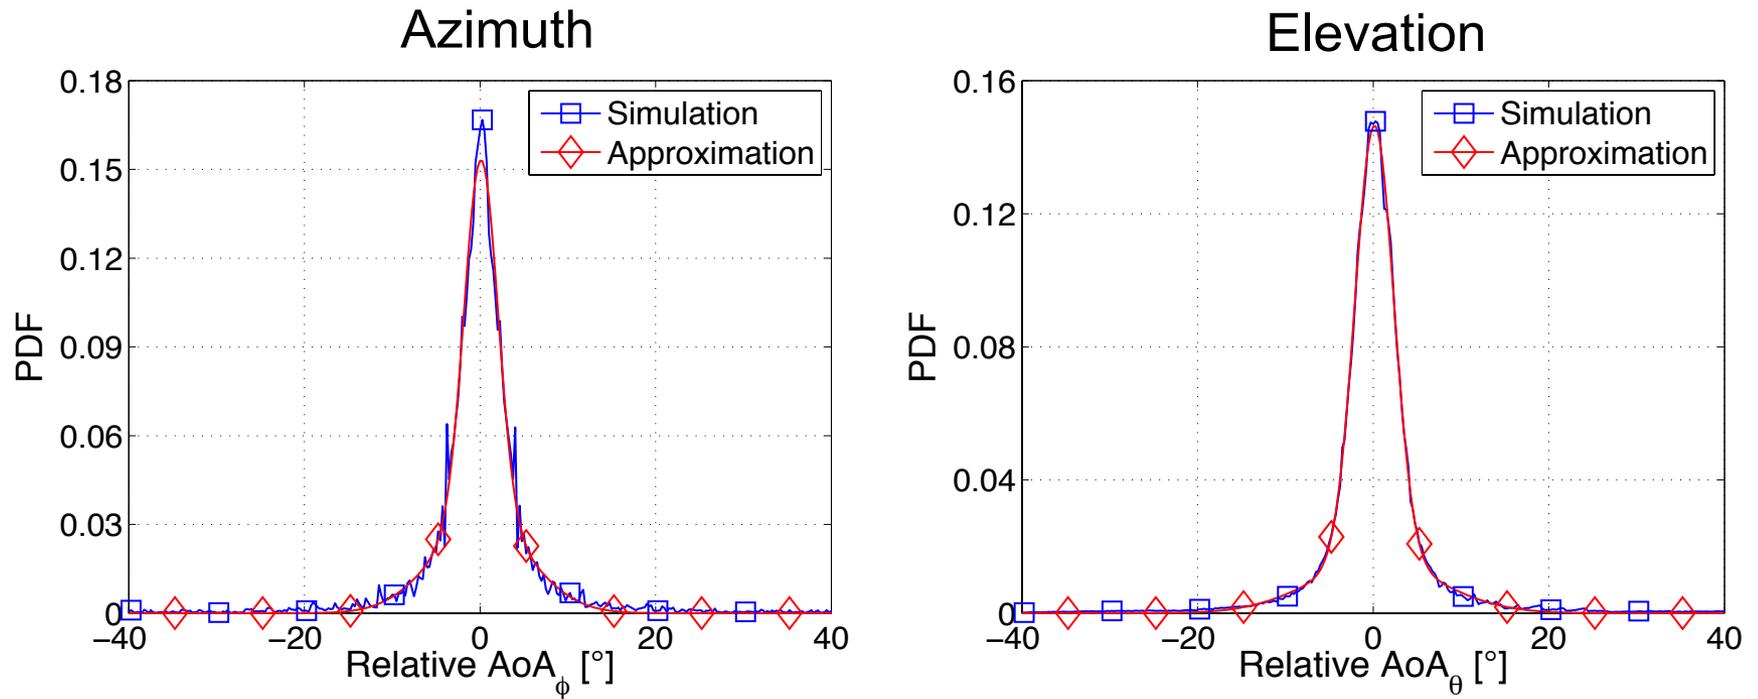

→ Very good approximation with a zero mean second order Gaussian mixture model (GMM); GMM parameters given in [1]


Angle of Arrival/Departure (4)

- The relative AoD:

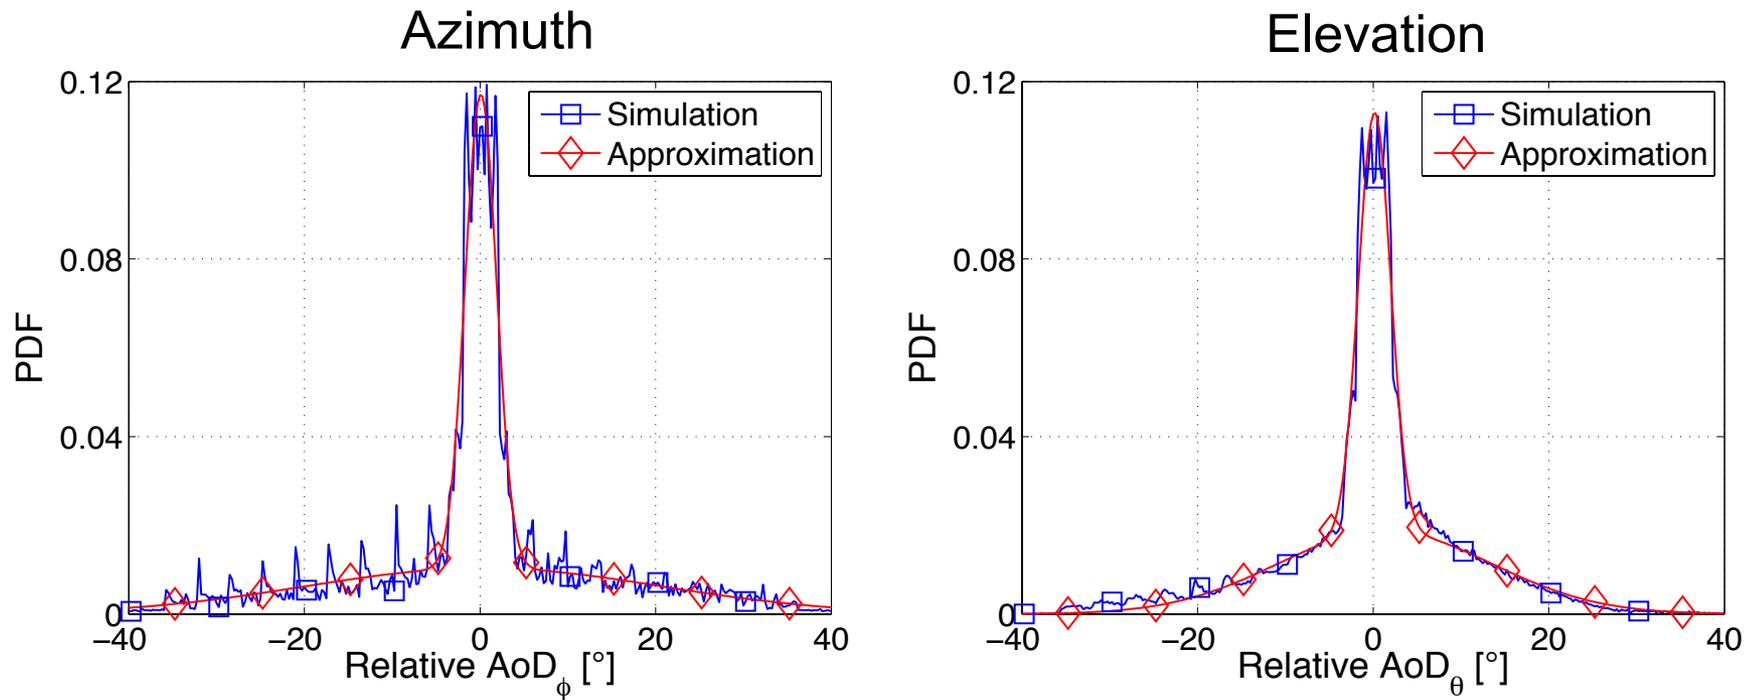


→ Angular characteristics of scattered MPCs can be randomized

Angular Power Profiles (1)

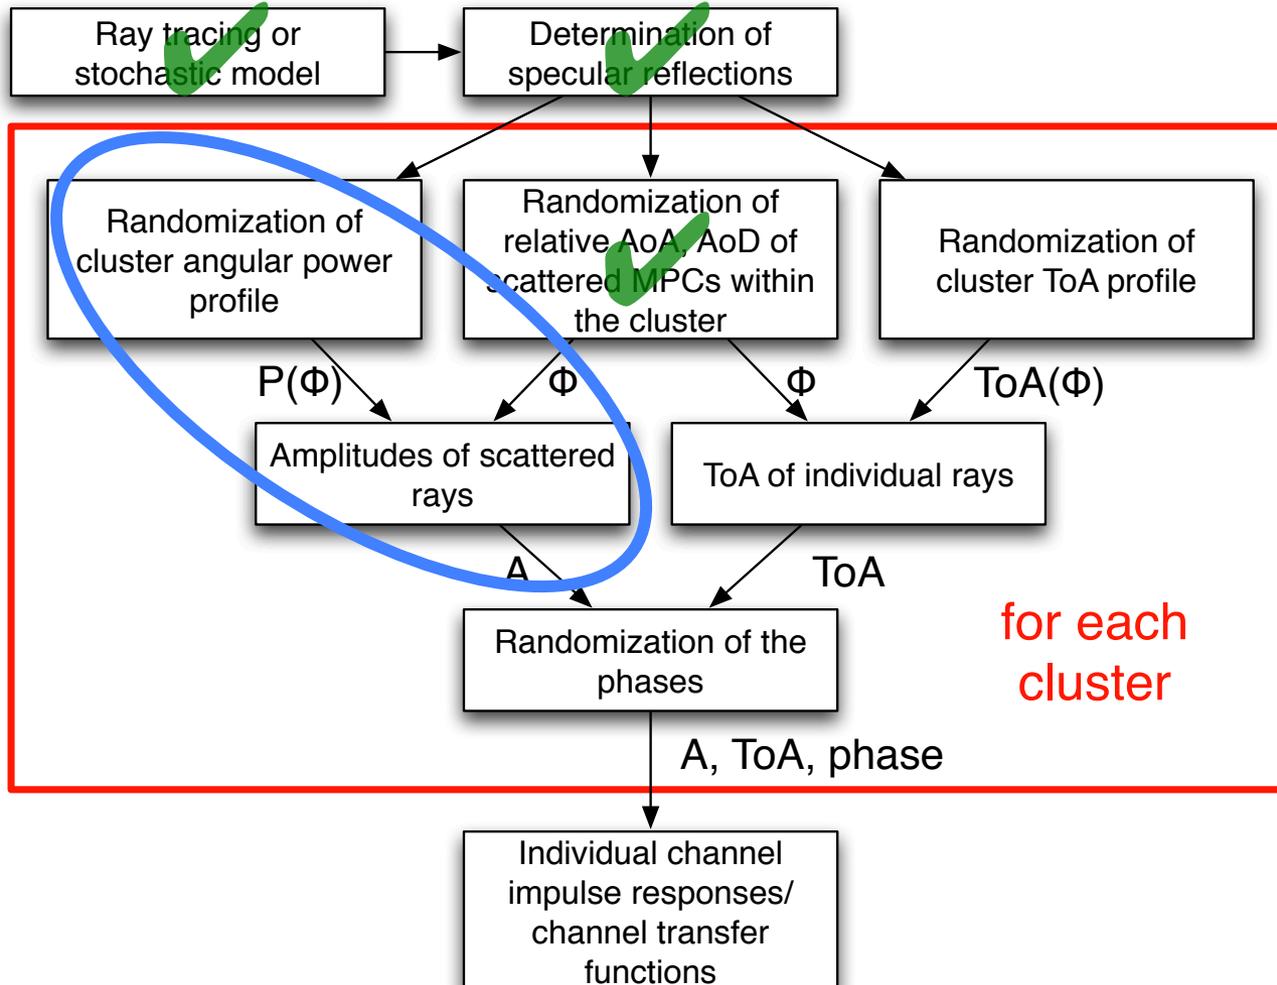

Angular Power Profiles (2)


- Strong angular dependence of the scattered power

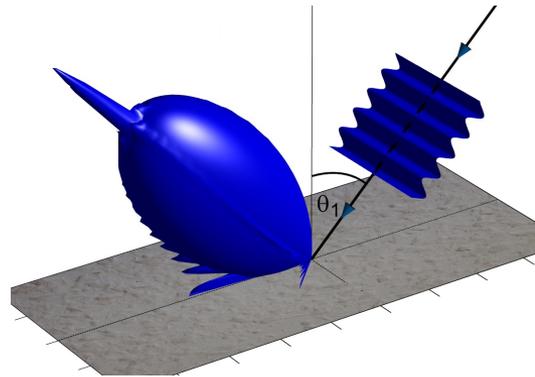

- Aim: Determination of cluster angular power profiles (APP)
 - **Amplitude** of scattered rays can be determined from the APP based on the **AoA/AoD**
 - Complete channel angular power profile can be composed of all cluster profiles
 - **Shape of the cluster APP** varies based on the position of the RX relative to the reflection/scattering point and hence **can be randomized**

Angular Power Profiles (3)

- Cut-out of the exemplary simulated APP:

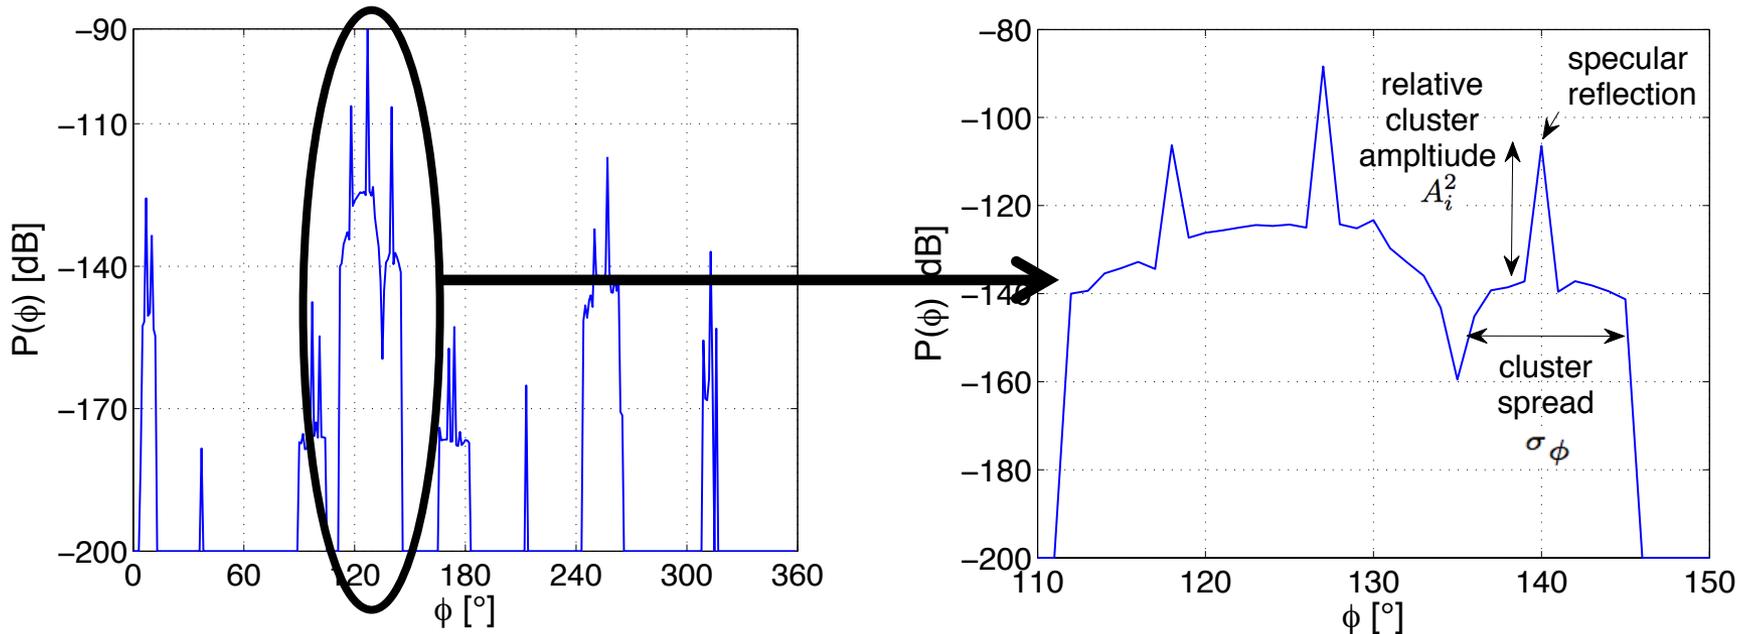

- Cluster power profile shape characterized with the specular reflection, the relative amplitude and the cluster spread
- Idea: Approximation of the cluster shape with a Gaussian function

Angular Power Profiles (4)

- Cluster power profile shape is assumed independent in azimuth and elevation:



$$\begin{aligned}
 P_i(\phi, \theta)_{cluster} &= P_{i,spec} \cdot A_i^2 \cdot P_i(\phi)_{cluster} \cdot P_i(\theta)_{cluster} \\
 &= P_{i,spec} \cdot A_i^2 \cdot e^{-\frac{1}{2} \left(\frac{\phi}{\sigma_\phi} \right)^2} \cdot e^{-\frac{1}{2} \left(\frac{\theta}{\sigma_\theta} \right)^2}
 \end{aligned}$$

$P_{i,spec}$	Power of the specular reflection within the i^{th} cluster	A_i	Relative amplitude of the scattered MPCs with reference to the specular power
Φ	Azimuth AoA with respect to the specular AoA $_\Phi$	σ_Φ	Cluster spread in the azimuth
Θ	Elevation AoA with respect to the specular AoA $_\Theta$	σ_Θ	Cluster spread in the elevation

→ Statistics for A_i , σ_Φ , σ_Θ must be derived to **randomize the cluster power profile**

Angular Power Profiles (5)



- Gaussian functions are fitted to each cluster APP at each of the 220 RX positions for both AoA and AoD
- Relative amplitude PDFs:

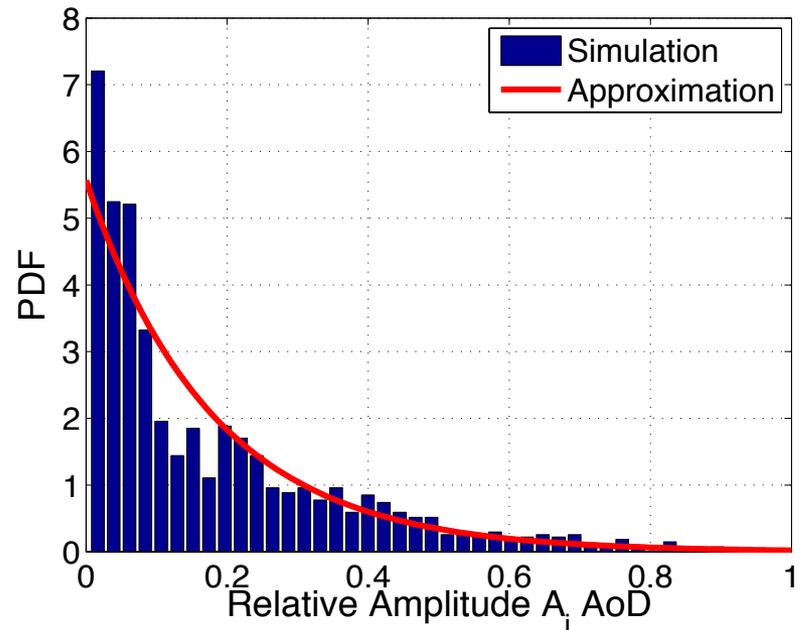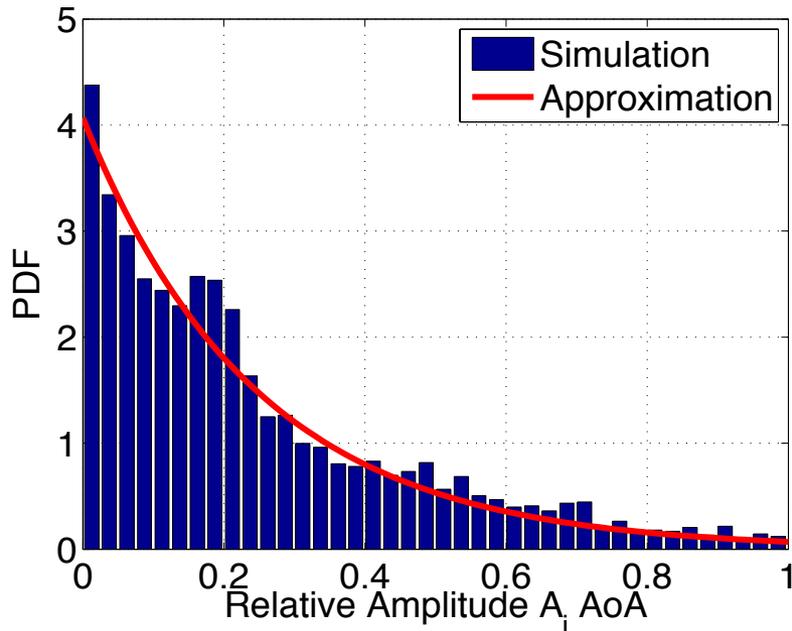

→ Approximation with **negative exponential distributions**; parameters can be found in [1]

Angular Power Profiles (6)



- Cluster spread PDFs for the AoA:

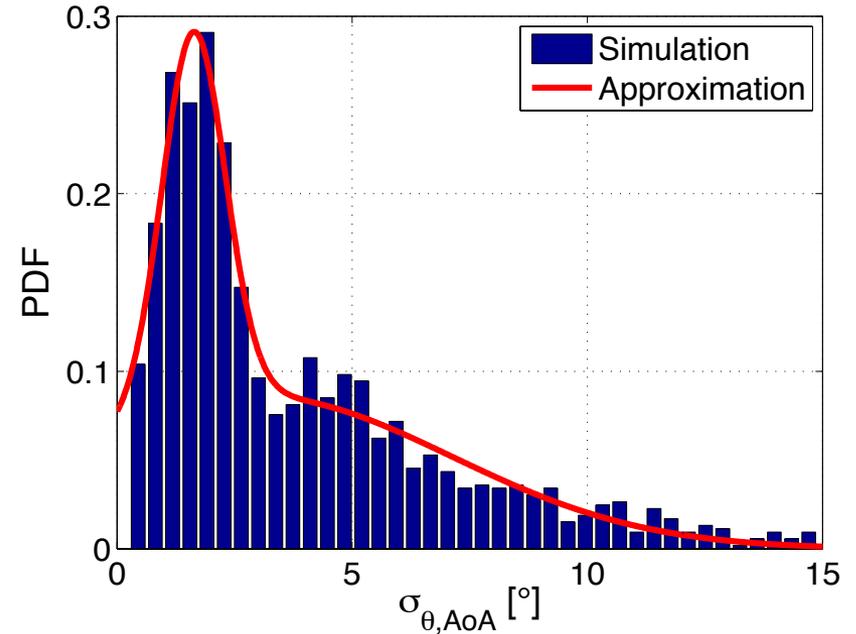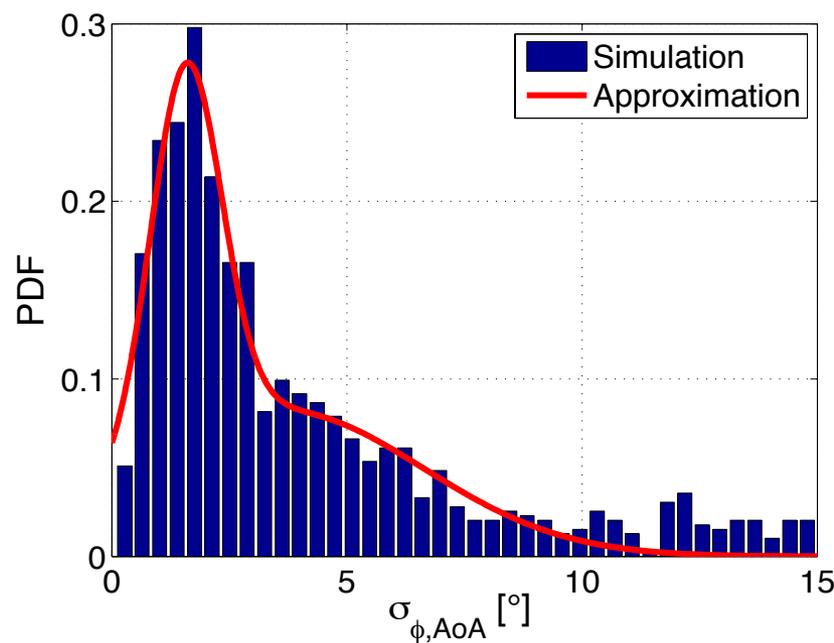

- Very similar behavior in azimuth and elevation
- Approximation with **second order Gaussian mixture models**; parameters can be found in [1]

Angular Power Profiles (7)


- Cluster spread PDFs for the AoD:

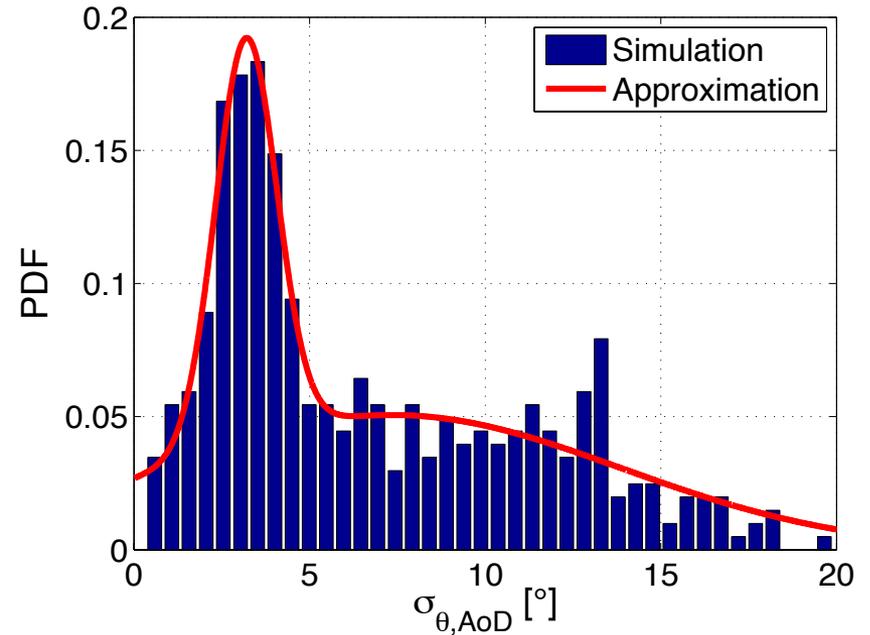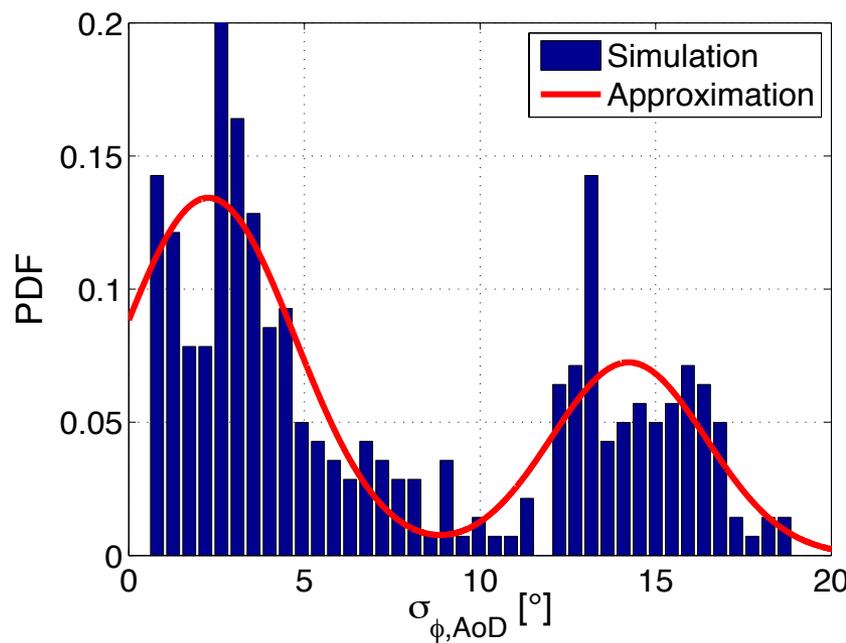


→ All necessary statistics known to randomize the APPs

Angular Power Profiles (8)

- Validation: Exemplarily **generated vs. simulated APP** (AoA):

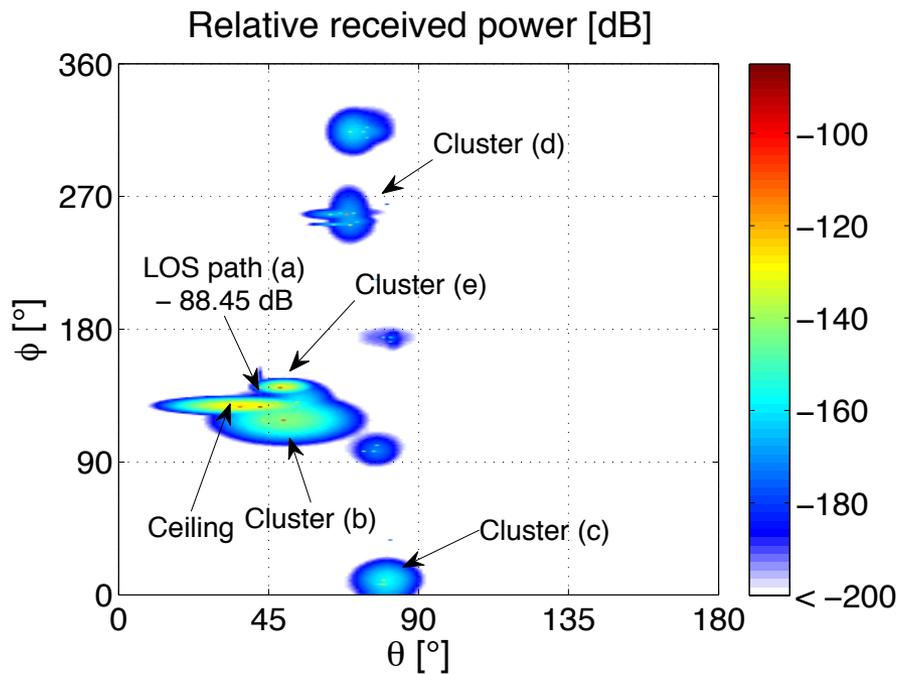

Randomized

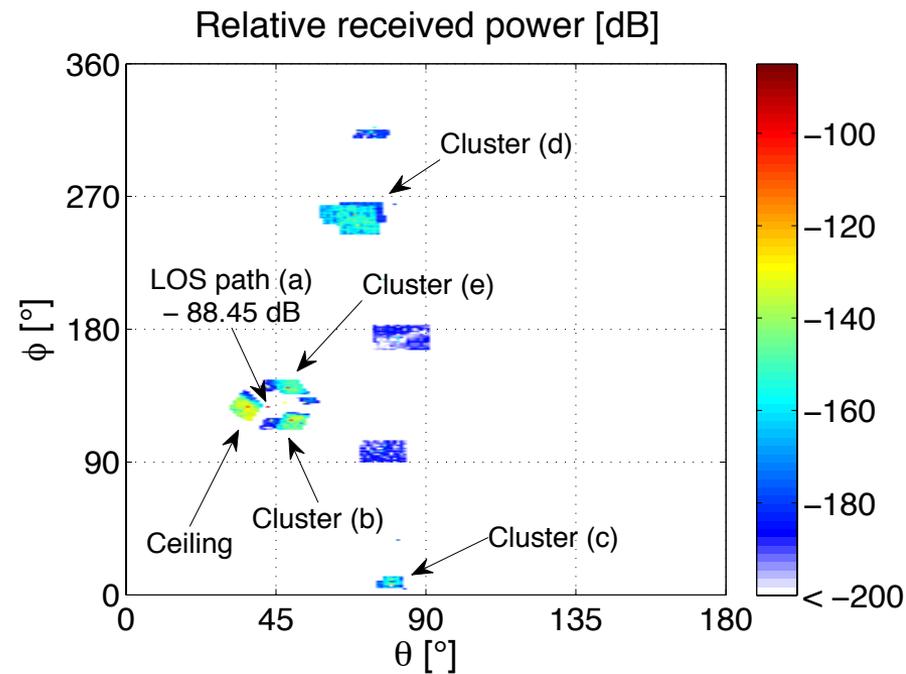


Ray tracing


- Realistic randomized power profile
- No need for complex computation of the scattered MPCs

Angular Power Profiles (9)

- Exemplarily generated vs. simulated APP for the AoD:

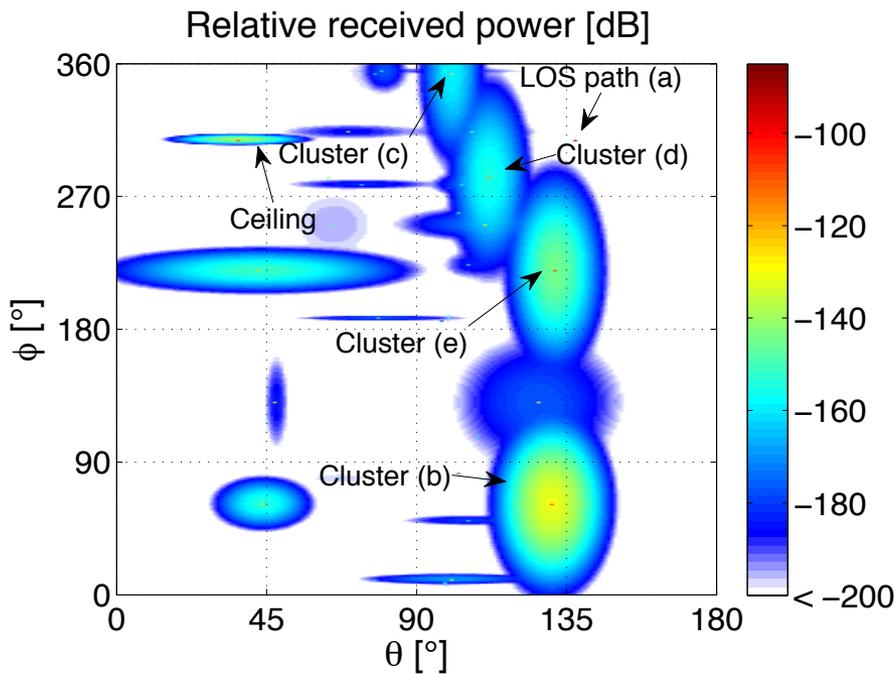

Randomized

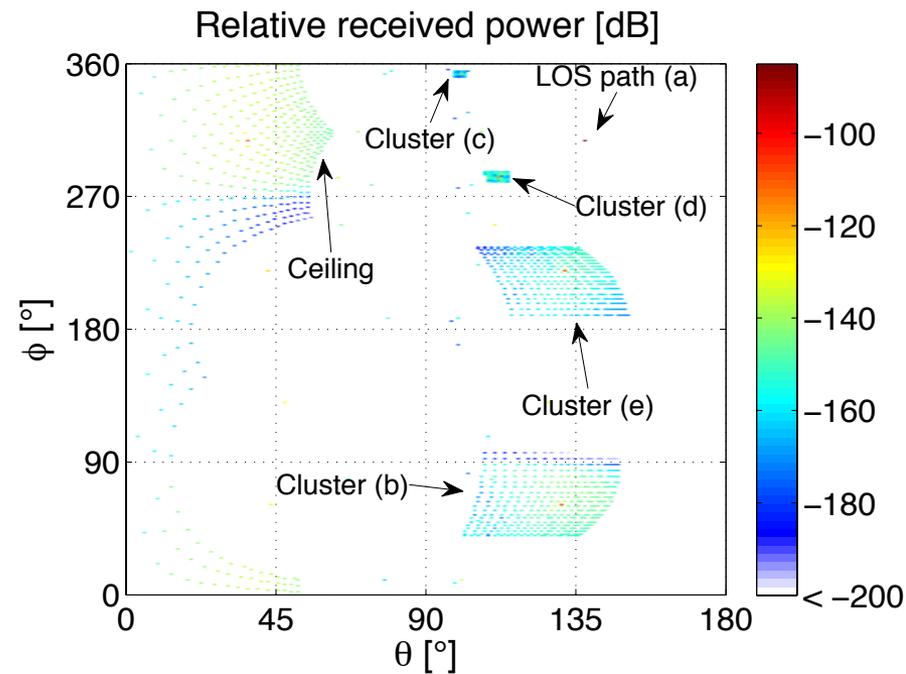


Ray tracing


- Continuous randomized profile compared to surface discretization
- Appropriate realizations also for the AoD

Angular Power Profiles (10)

- Exemplarily generated vs. simulated APP for the AoA in the azimuth:

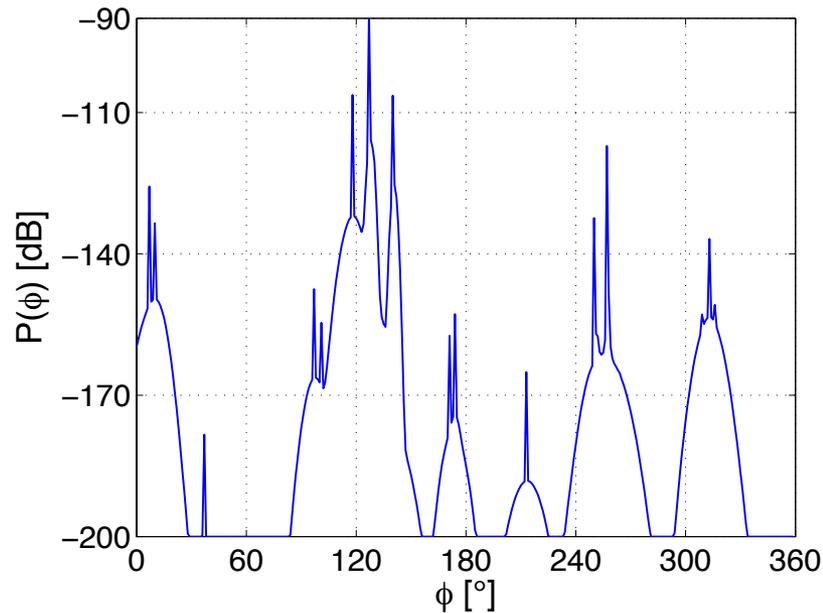

Randomized

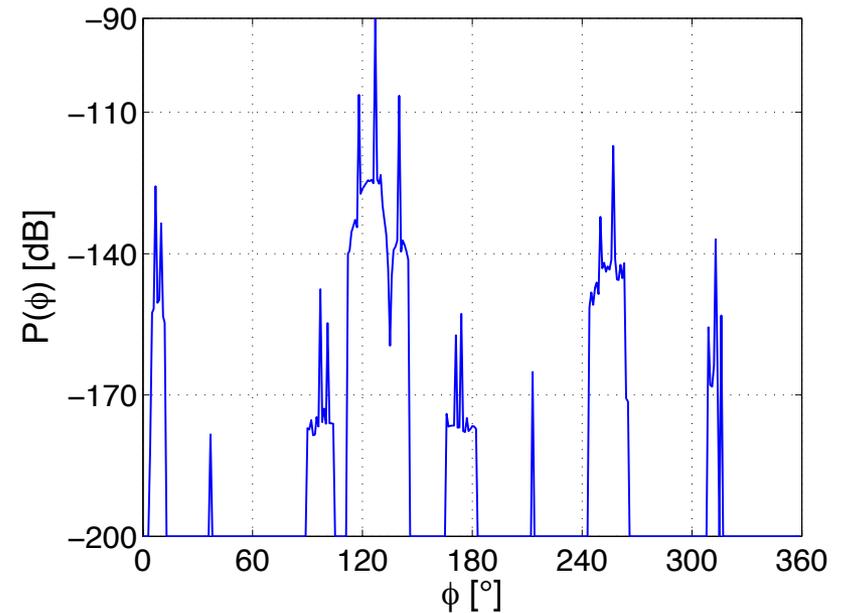


Ray tracing

- Sharp cluster boundaries due to limited number of respected surface elements in ray tracing
- General cluster behavior well approximated with Gaussian functions

Angular Power Profiles (11)


- Roughness dependence?
 - AoA/AoD statistics remain unaffected
 - Higher roughness \rightarrow more power is scattered out of the specular direction
 - New statistics for cluster amplitudes and cluster spreads are required (complete statistics for two roughnesses can be found in [1])

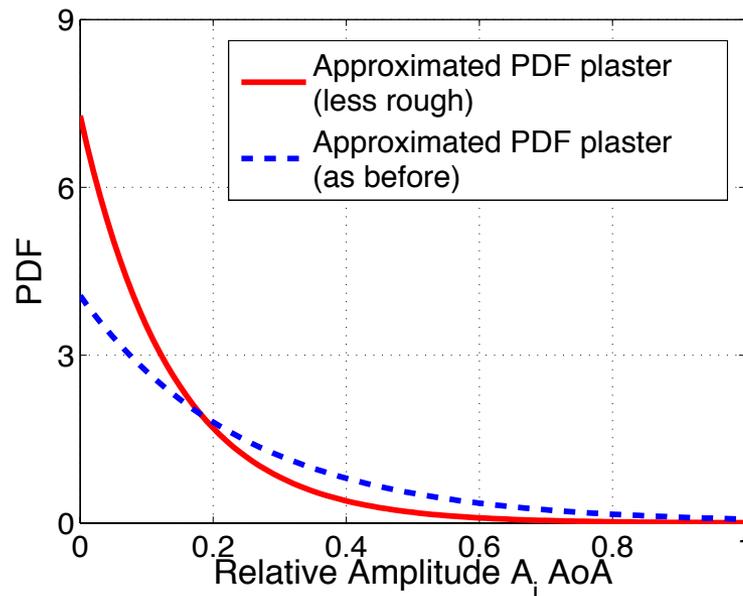

\rightarrow Lower roughness leads to lower relative cluster amplitudes


Angular Power Profiles (12)

- Polarization dependence?
 - Polarization affects both the specular reflection and the scattered MPCs in the same way
 - Polarization has hardly any impact on the cluster spread

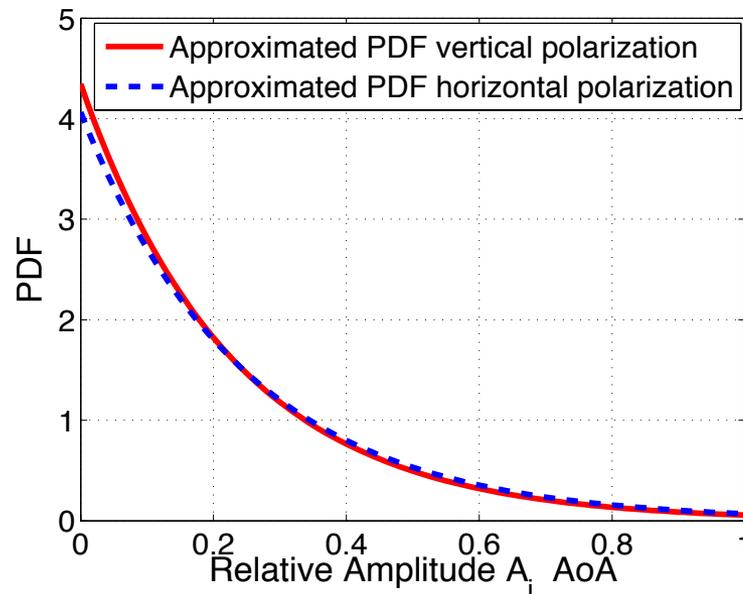



- Relative amplitude statistics remain almost unaffected
- Slight differences occur due to geometrical depolarization

Time of Arrival (1)

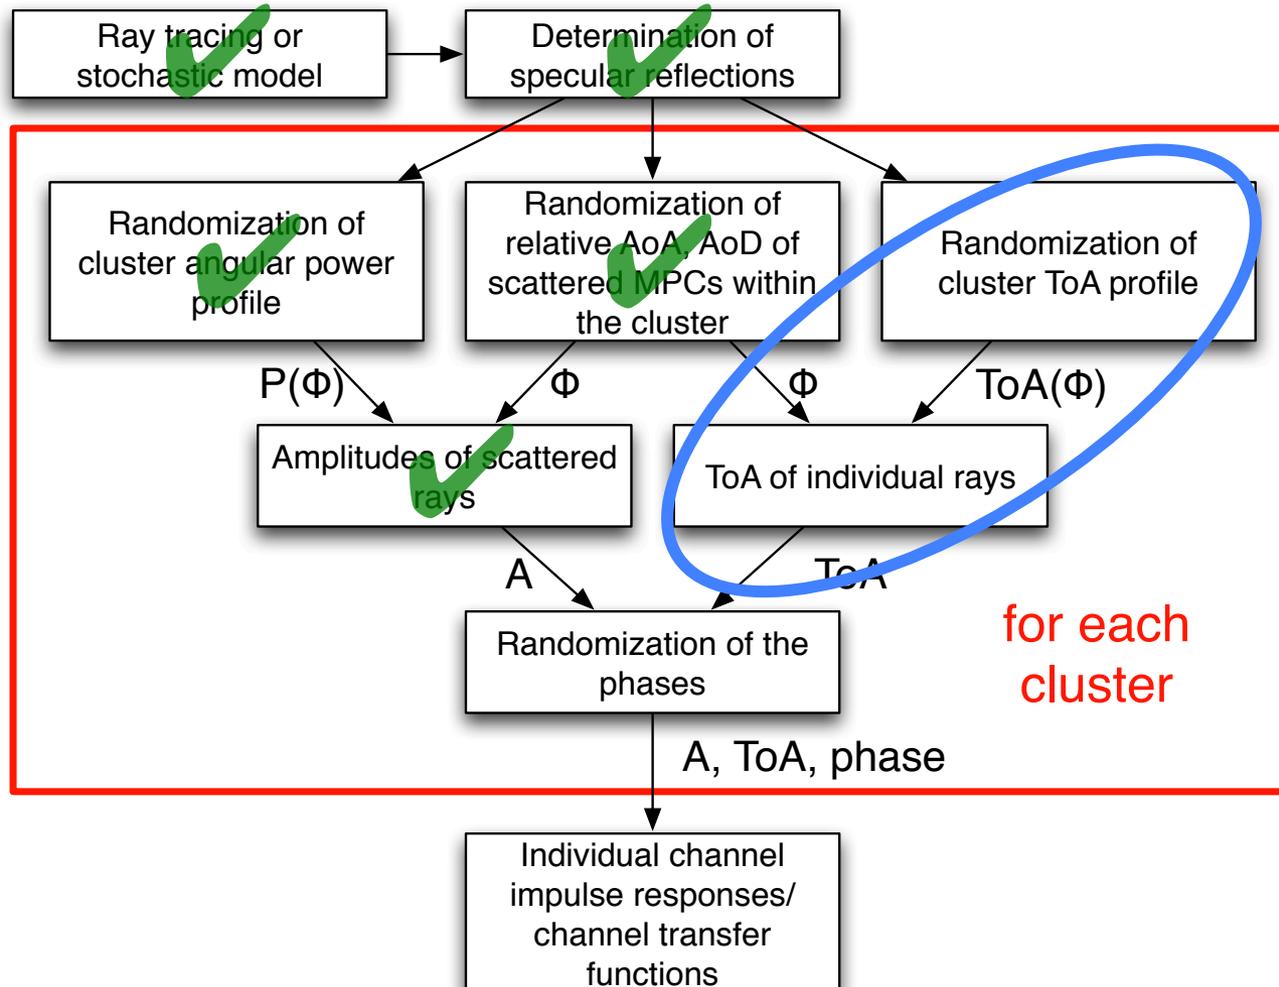

Time of Arrival (2)


- Exemplarily simulated AoA/ToA profile:

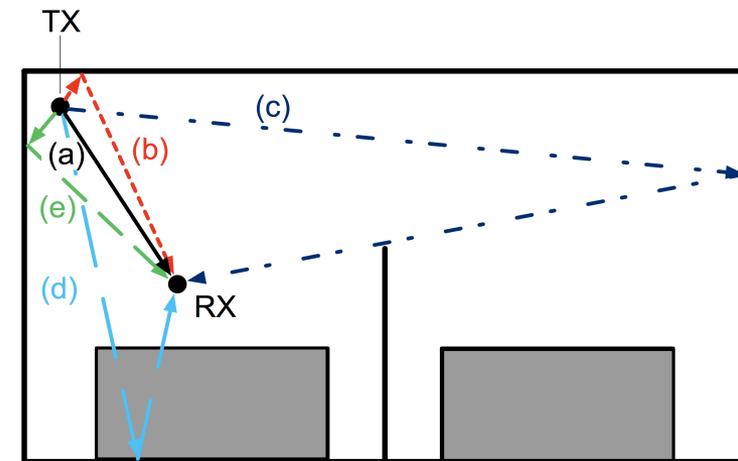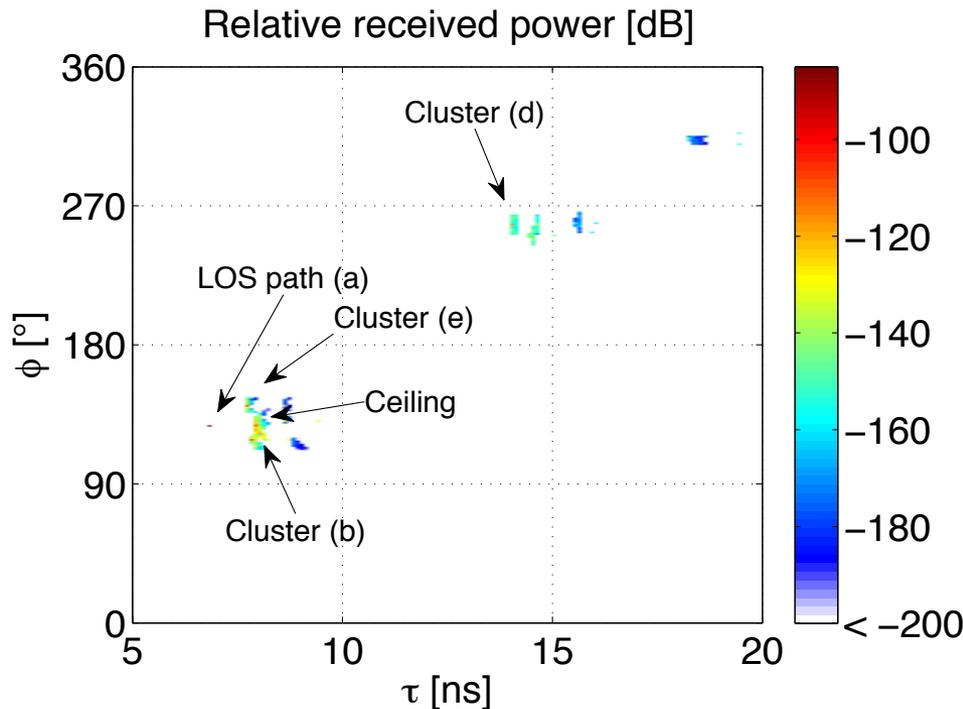

- Clustered behavior also occurs in time domain
- Question: Is there any interdependence between AoA and ToA?

Time of Arrival (3)

- Scattered rays propagate on shells of cones around the specularly reflected ray:

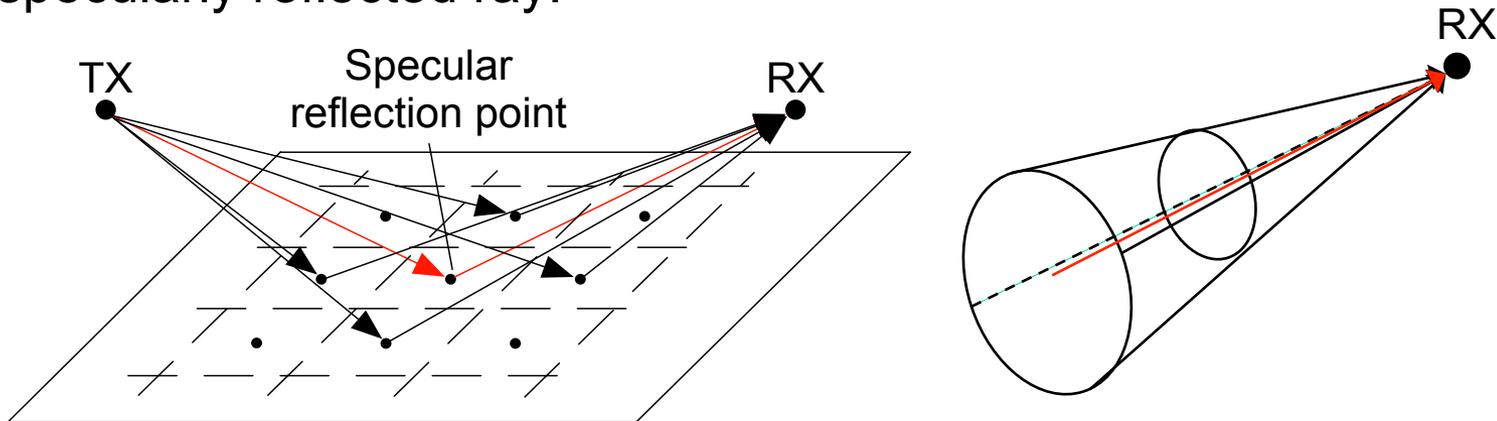

→ Their relative path length with respect to the specular reflection and hence also the **AoA-dependent ToA** of the i^{th} cluster can be approximated with a **second order polynomial**


$$ToA_i(\phi, \theta) = \tau_i + (c_\phi \cdot \phi^2) + (c_\theta \cdot \theta^2)$$

τ_i Delay of the specular path

$c_{\phi, \theta}$ Cluster-specific constants;
to be randomized

Time of Arrival (4)



- Quadratic functions are fitted to each cluster separately for Φ and Θ in order to obtain statistics of $c_{\Phi, \Theta}$
- Exemplary fitting for one cluster:

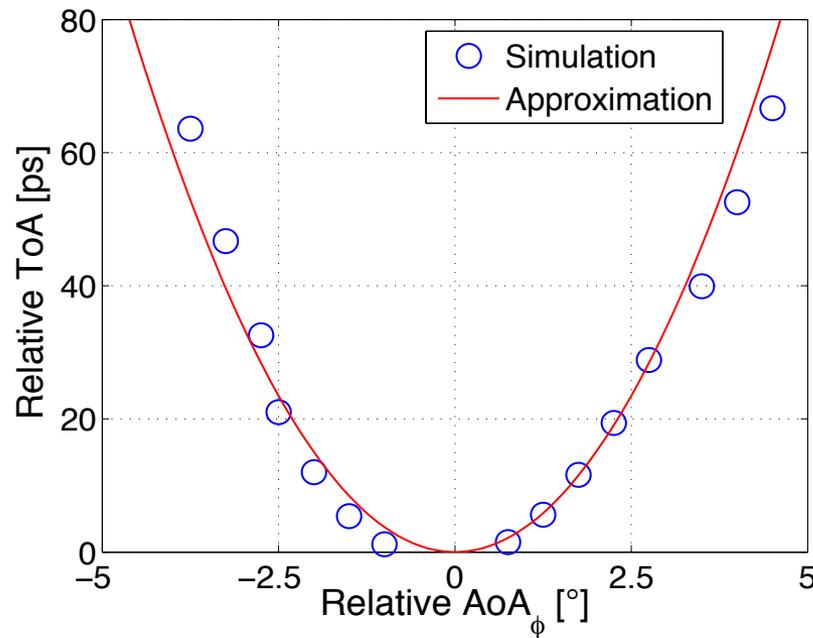

→ Approach proves suitable

Time of Arrival (5)


- Histograms:

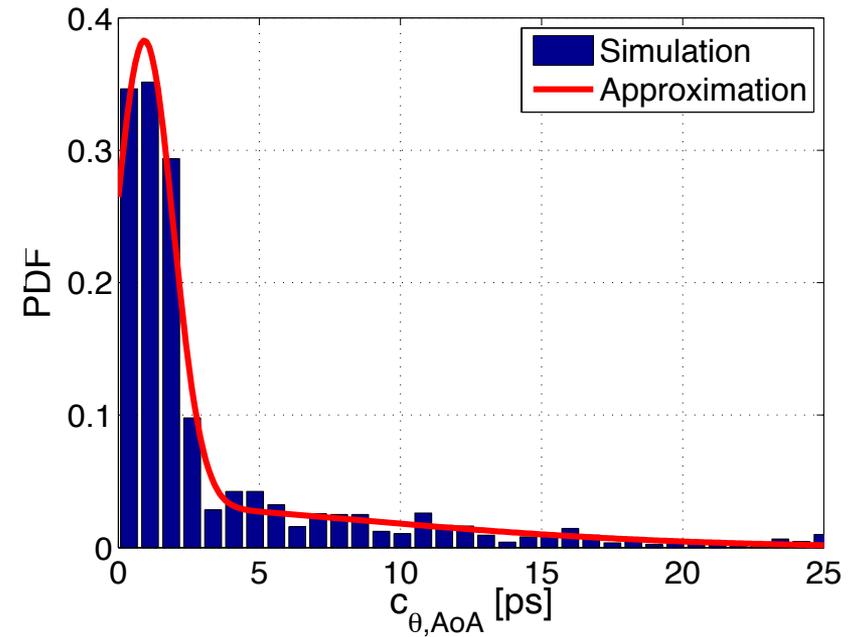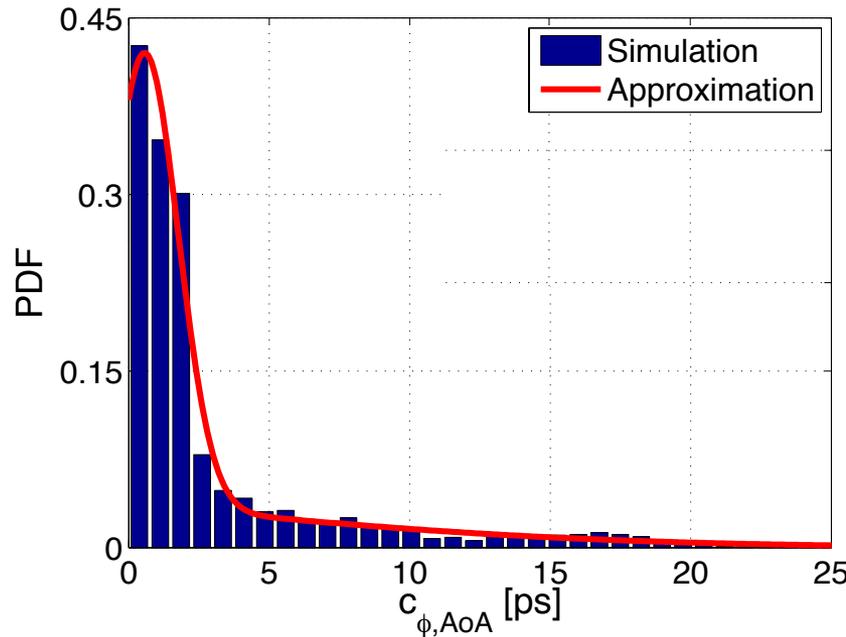

- Again good approximation with second order GMM
- Similar statistics for the AoD (omitted here, cf. [1])
- All information known to randomize the ToA profile


Time of Arrival (6)

- Cut-out of an exemplarily generated vs. simulated AoA/ToA profile:

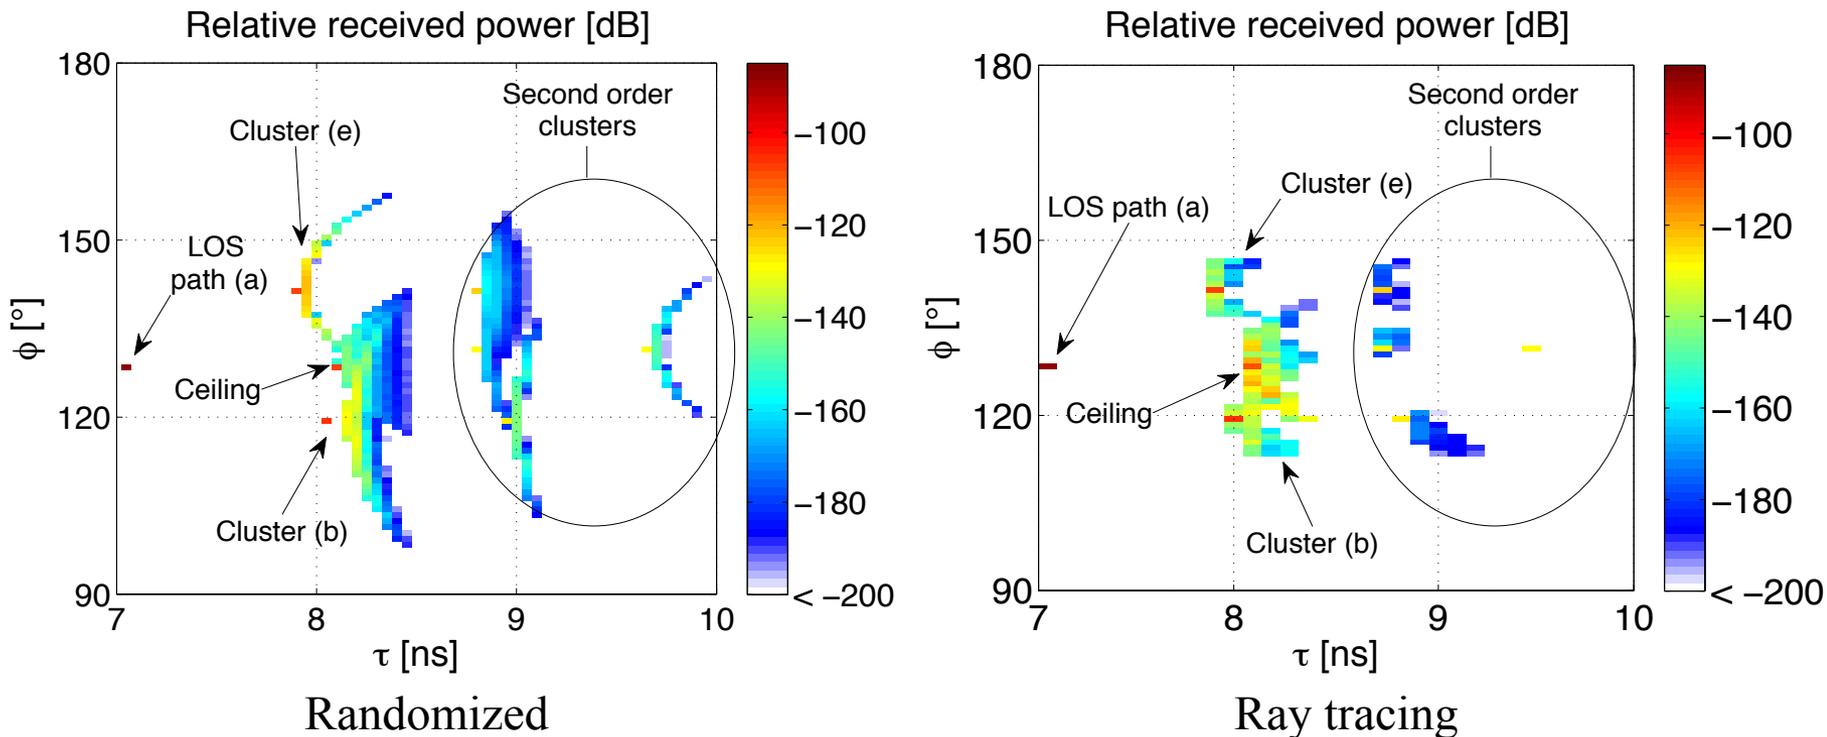


→ Slightly different shapes due to the stochastic generation, but realistic behavior

Phase (1)

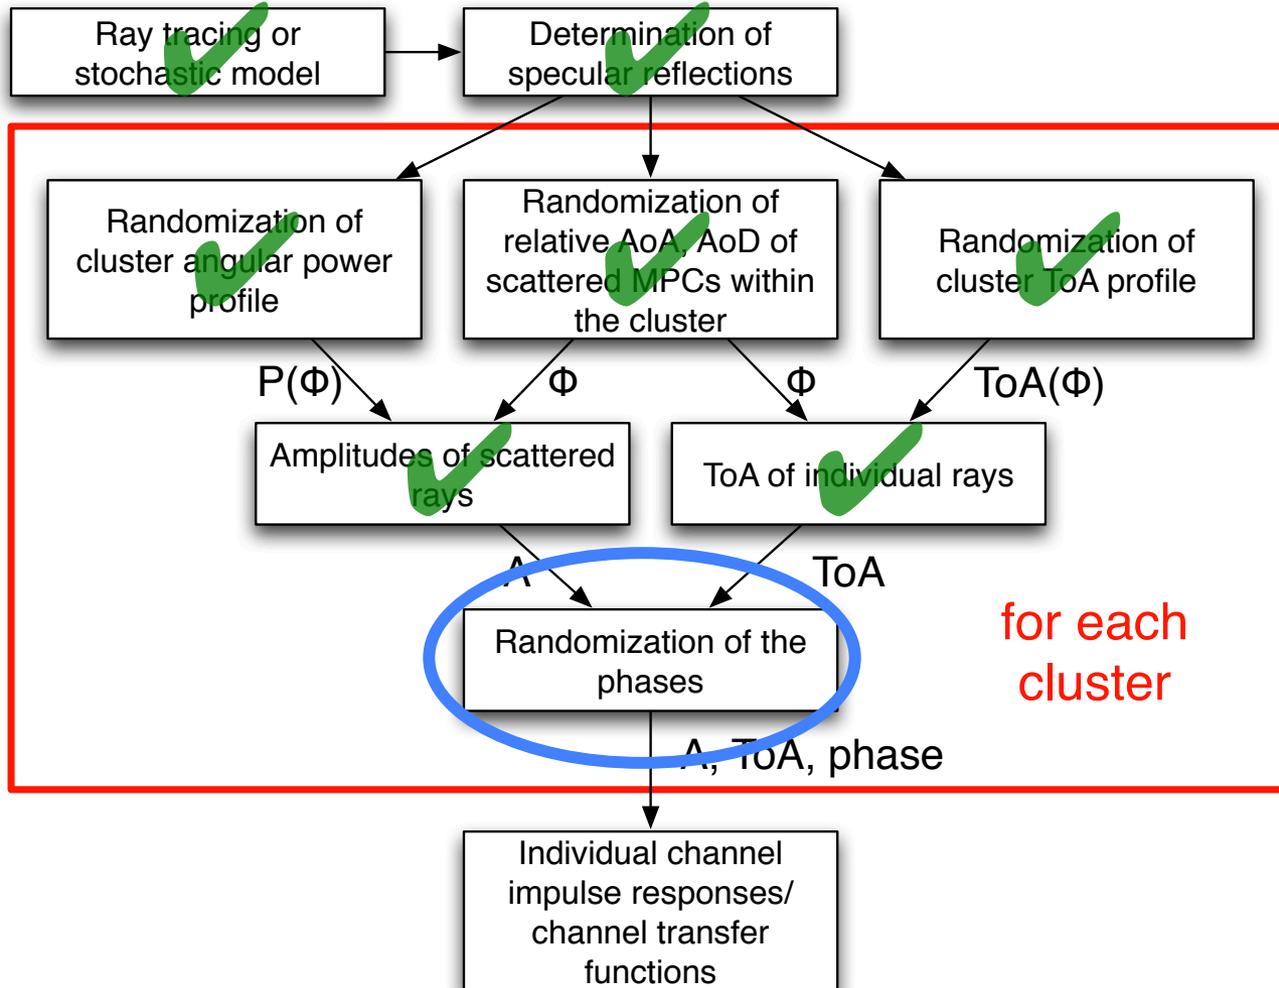


Phase (2)

- Phase required for complete complex channel realizations
- PDF of the **relative phase** with respect to the specular phase:

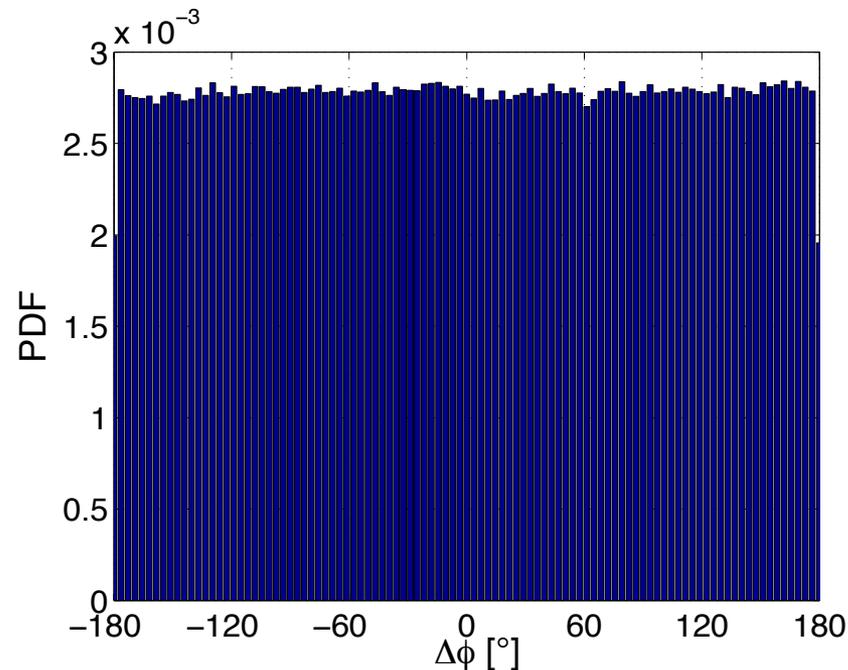



- Almost perfect uniform distribution
- **Random phase between $-\pi$ and $+\pi$** for scattered MPCs

Generated Impulse Response/Transfer Function (1)

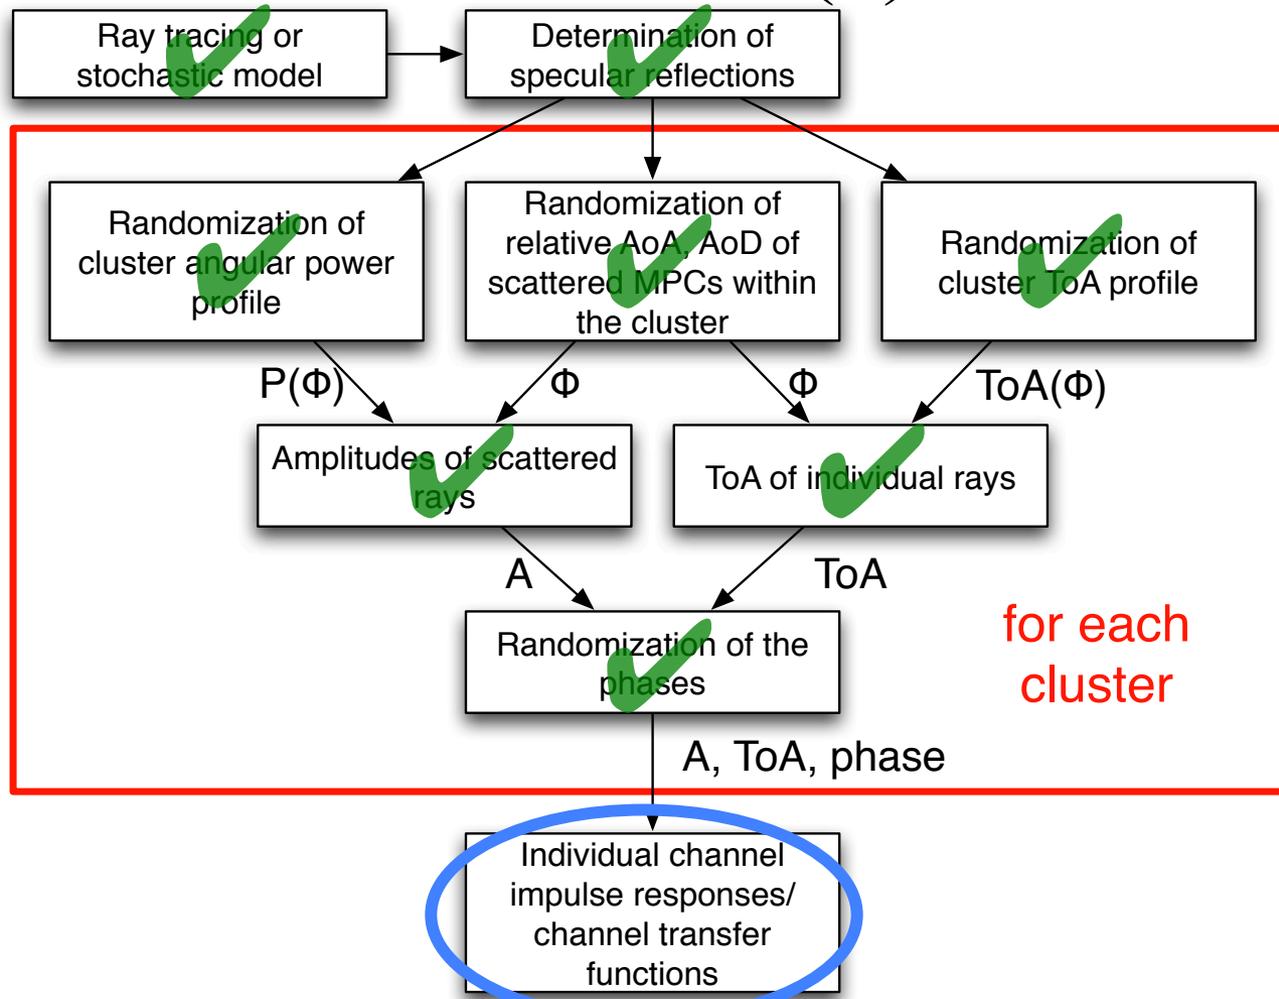

Generated Impulse Response/Transfer Function (2)

- Cut-out of a generated power delay profile and the corresponding transfer function (omnidirectional antenna) with 20 GHz bandwidth:

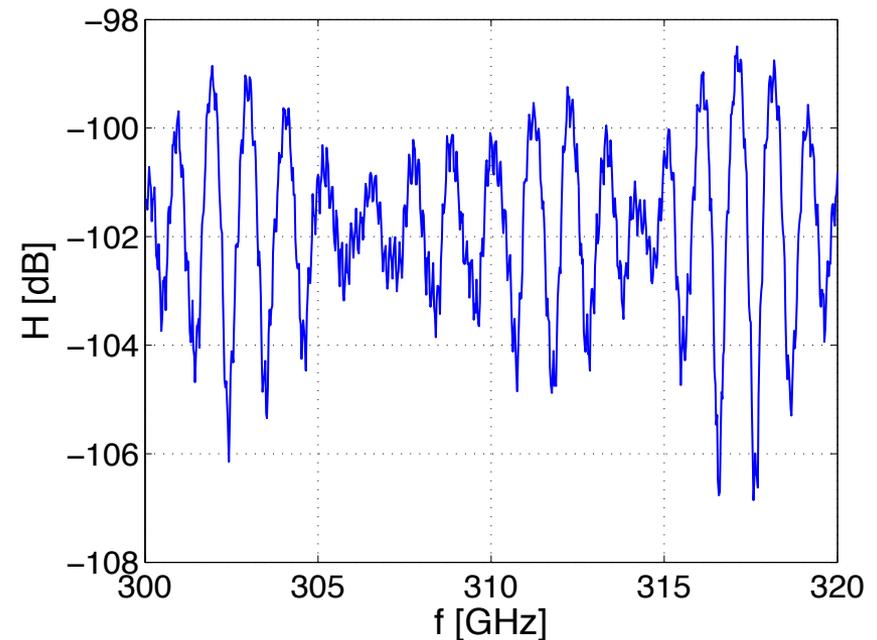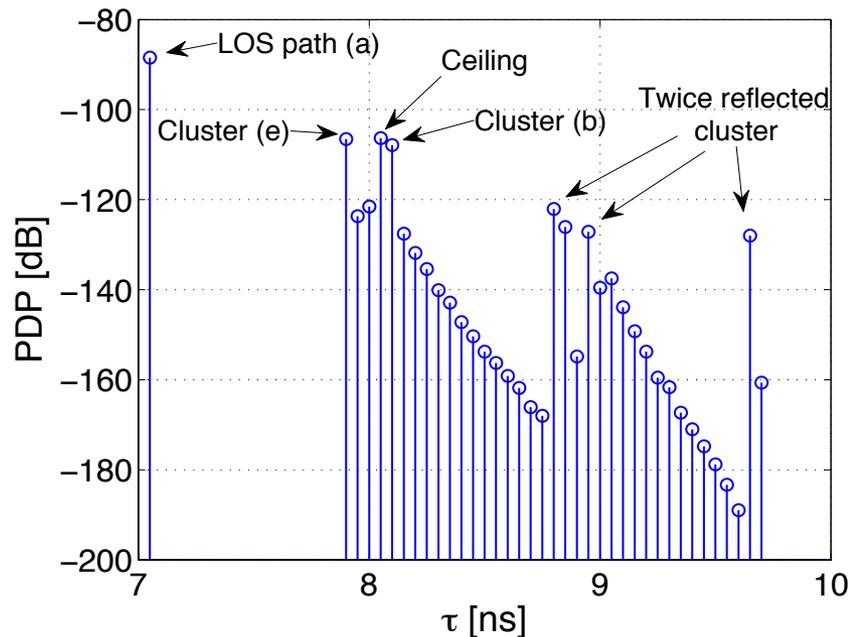

- Model also suitable to provide **realistic channel transfer functions**
- Channel transfer functions as input for system simulations

Outline

1. Introduction
2. The Investigated Scenario
3. Modeling of Multipath Clusters
- 4. Summary/Outlook**

Summary

- A **physically motivated stochastic channel model** for scattered MPCs has been introduced
- **Realistic channel realizations** can be generated **very fast** for **system simulations**
- Necessary steps:
 1. Specular reflections from ray tracing or a stochastic model
 2. **AoAs/AoDs** of scattered MPCs within the clusters from PDFs
 3. Cluster angular power profiles from statistics
 4. **Amplitudes** from the APPs
 5. Cluster ToA functions from statistics
 6. **ToAs** from the ToA functions
 7. Random **phases** between $-\pi$ and π

→ Complete channel realization

Outlook

- **Specular reflections** will also be modeled statistically
- Further statistics must be derived in **other representative scenarios** like e.g. a living or a conference room
- **Meaningful system simulations** can be performed under realistic channel conditions for plenty of channel realizations
- **System specifications** and design guidelines can be developed

Outlook

More information on the topic including parameters for the approximated analytical PDFs can be found in:

- [1] Priebe, S.; Jacob, M.; Kürner, T.: *AoA, AoD and ToA Characteristics of Scattered Multipath Clusters for THz Indoor Channel Modeling*. 17th European Wireless Conference (EW), 9 pages, Vienna, April 2011

Thank you for paying attention.

Dipl.-Ing. Sebastian Priebe
priebe@ifn.ing.tu-bs.de