

Project: IEEE P802.15 Working Group for Wireless Personal Area Networks (WPANs)

Submission Title: RoF-Based Terahertz Fronthaul for Mobile/Wireless Access Systems

Date Submitted: May 12, 2014

Source: Atsushi Kanno,oshiaki Kuri, Tetsuya Kawanishi Akifumi Kasamatsu, Norihiko Sekine,
Iwao Hosako, and Hiroyo Ogawa, NICT

4-2-1, Nukuikita, Koganei, 184-8795, Tokyo, Japan

Voice: +81 42 327 6876, FAX: +81 42 327 7938, E-Mail: kanno@nict.go.jp

Yuki Yoshida and Ken'ichi Kitayama, Osaka University

Voice: +81 6 6879 7728, FAX: +81 6 6879 7688, E-Mail: kitayama@comm.eng.osaka-u.ac.jp

Re: n/a

Abstract: The aim of this contribution is to provide configuration of Radio over Fiber (RoF) based terahertz fronthaul for mobile/wireless access systems.

Purpose: Informing 802.15.3d on RoF based terahertz technologies for fixed point-to-point link.

Notice: This document has been prepared to assist the IEEE P802.15. It is offered as a basis for discussion and is not binding on the contributing individual(s) or organization(s). The material in this document is subject to change in form and content after further study. The contributor(s) reserve(s) the right to add, amend or withdraw material contained herein.

Release: The contributor acknowledges and accepts that this contribution becomes the property of IEEE and may be made publicly available by P802.15.

RoF-Based Terahertz Fronthaul for Mobile/Wireless Access Systems

Atsushi Kanno, Toshiaki Kuri, Tetsuya Kawanishi,
Akifumi Kasamatsu, Norihiko Sekine,
Iwao Hosako and Hiroyo Ogawa

National Institute of Information and Communications Technology (NICT), Japan

New Elements of this Contribution

At the last IEEE802.15 meeting, the technologies of fronthaul for broadband mobile/wireless access systems were proposed using Radio over Fiber (RoF) (doc.: IEEE 802.15-0177-02-003d).

Newly developed elements for this contribution are as follows:

- Technical parameters of 300GHz-band high-gain antenna for THz transmitter.
- Block diagram of THz transmitter using Optical Sub-Harmonic IQ Mixer (O-SHIQM).
- Theoretical transmission distance of THz transceiver using high-gain antenna.

Definition of Fronthaul at ITU-T

3.2 Terms defined in this Supplement

This Supplement defines the following terms:

3.2.1 Mobile backhaul (MBH): *The connection among base stations and the other mobile network nodes*

3.2.2 Mobile backhaul link: *A link to establish a mobile backhaul*

3.2.3 Mobile fronthaul (MFH): *The connection between one and the other of separated radio transceiver functions within a base station*

3.2.4 Mobile fronthaul link: *A link to establish a mobile fronthaul*

Reference: “Proposal of definition of “mobile fronthaul” in G Suppl. RoF”, ITU-T Q2/15 Interim Meeting, D72, February 20, 2014.

Definition of Fronthaul at ITU-T


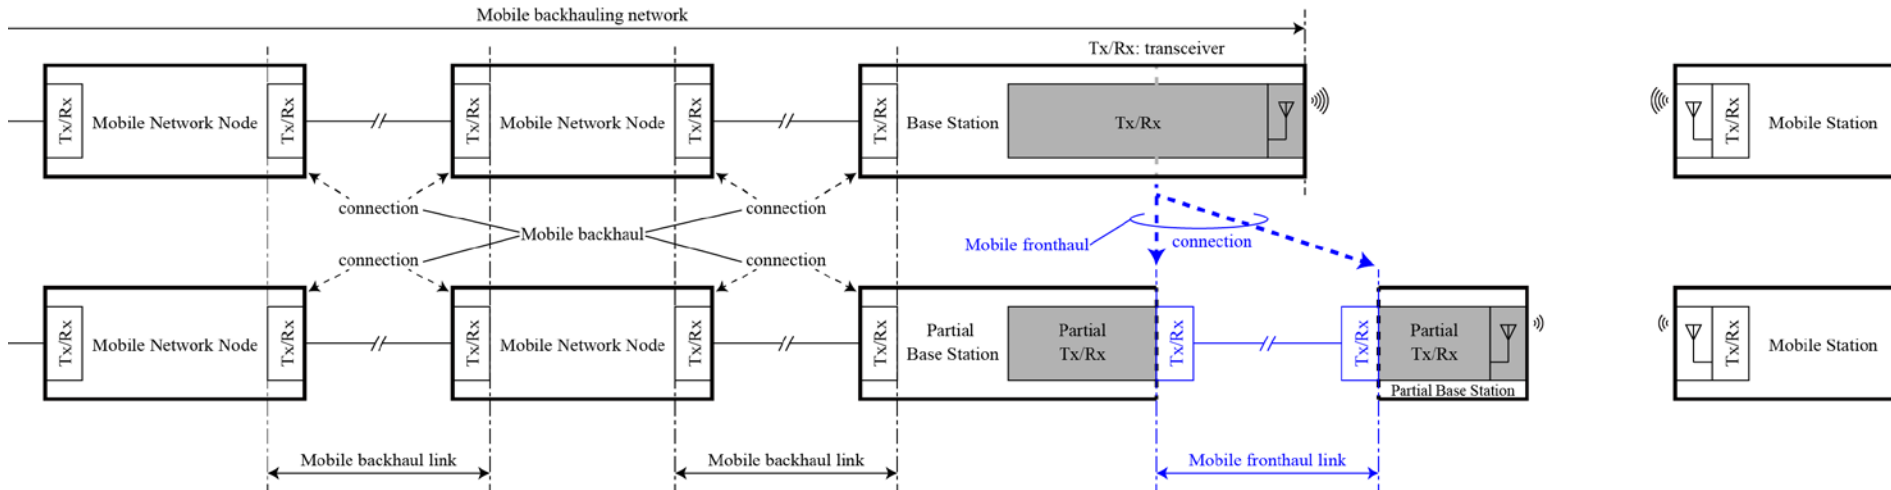


Fig. 2: Definition of “mobile fronthaul (MFH)” and “mobile fronthaul link”: (upper) conventional architecture, (lower) possible architecture with mobile fronthaul.


Reference: “Proposal of definition of “mobile fronthaul” in G Suppl. RoF”, ITU-T Q2/15 Interim Meeting, D72, February 20, 2014.

Mobile/wireless access networks using RoF-based Terahertz Fronthaul

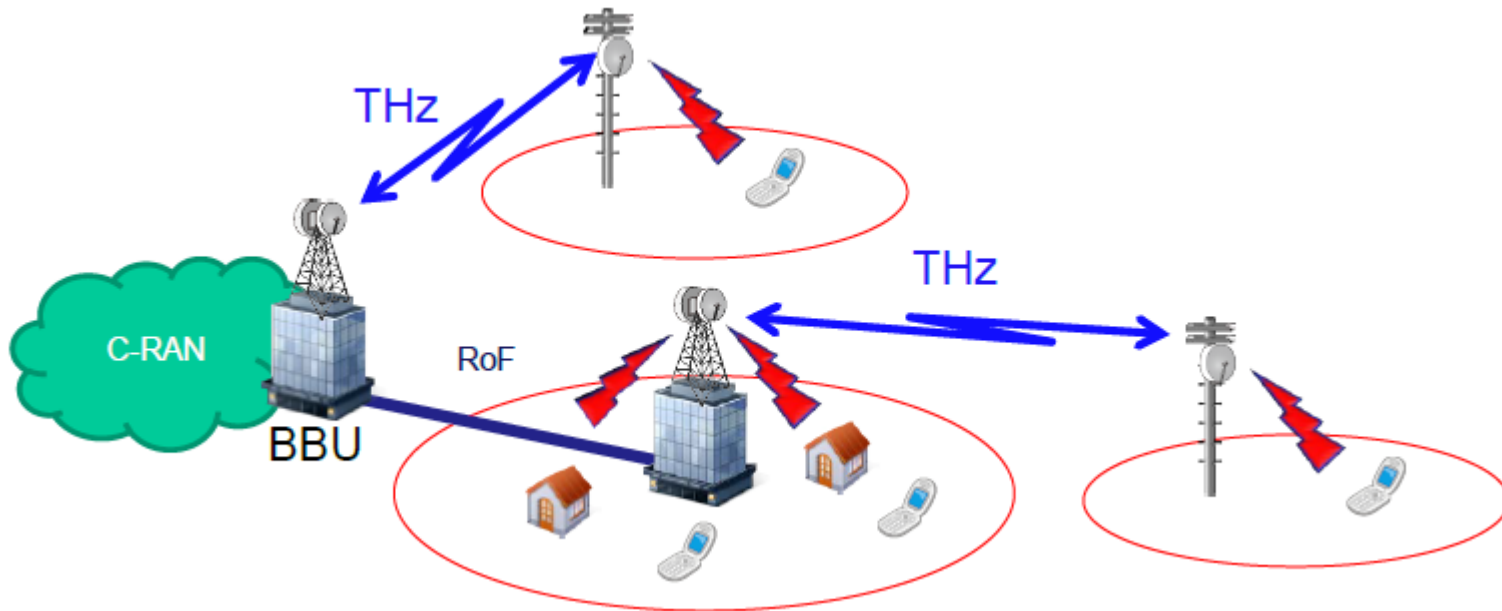

RoF-Based Terahertz Fronthaul

Base Station

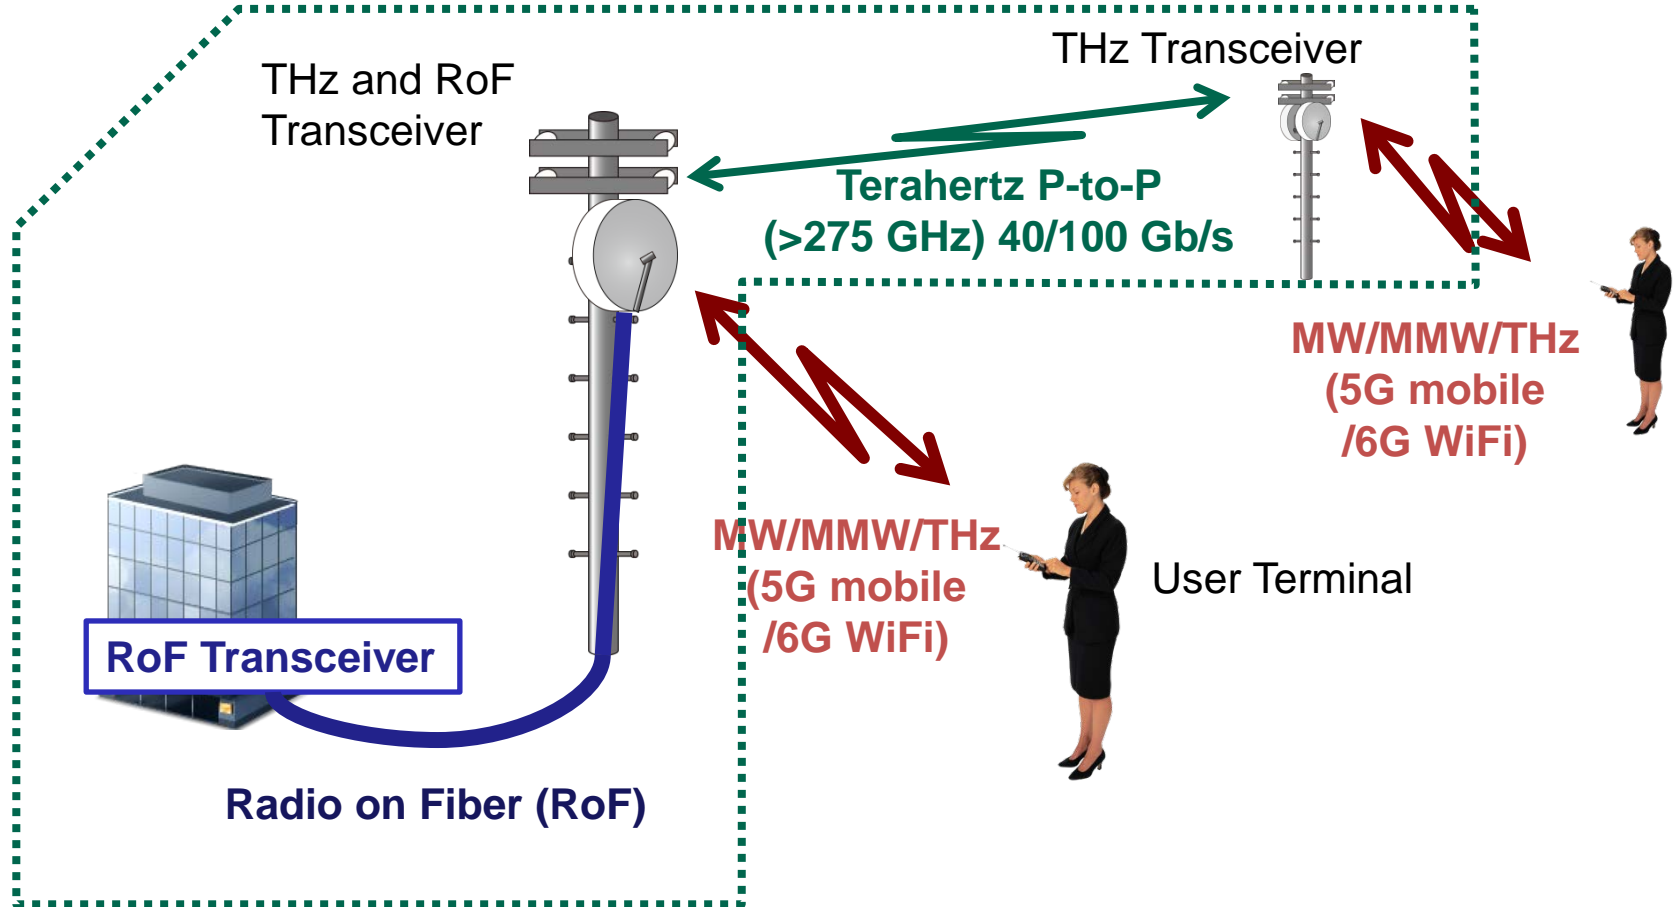

Block Diagram of Fiber-Connected THz Transmitter



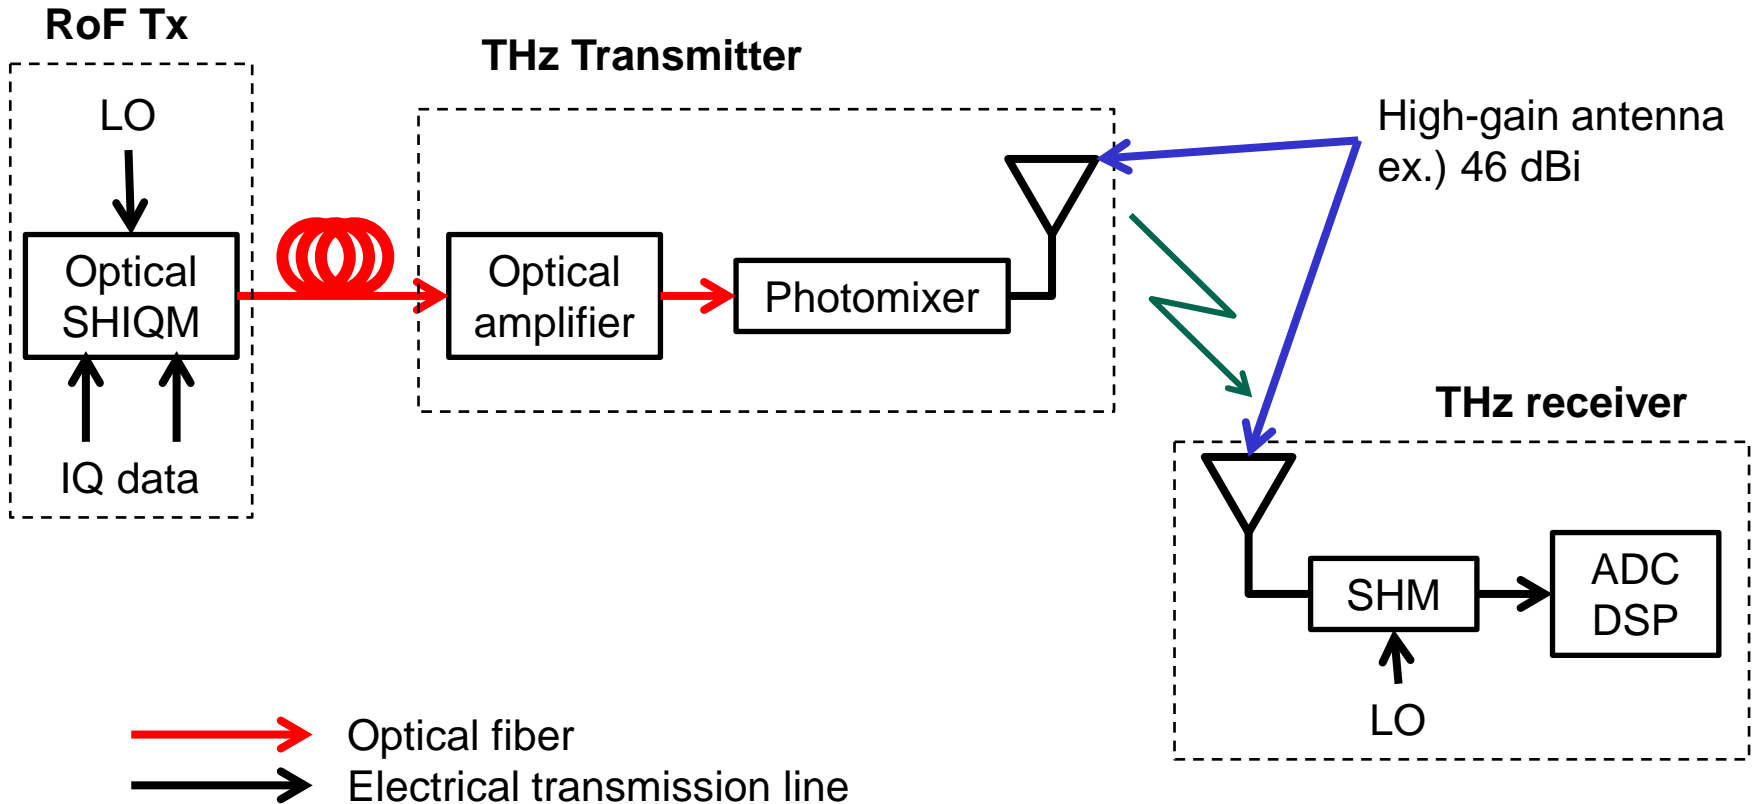


Photo of High-Gain Antenna for 300 GHz

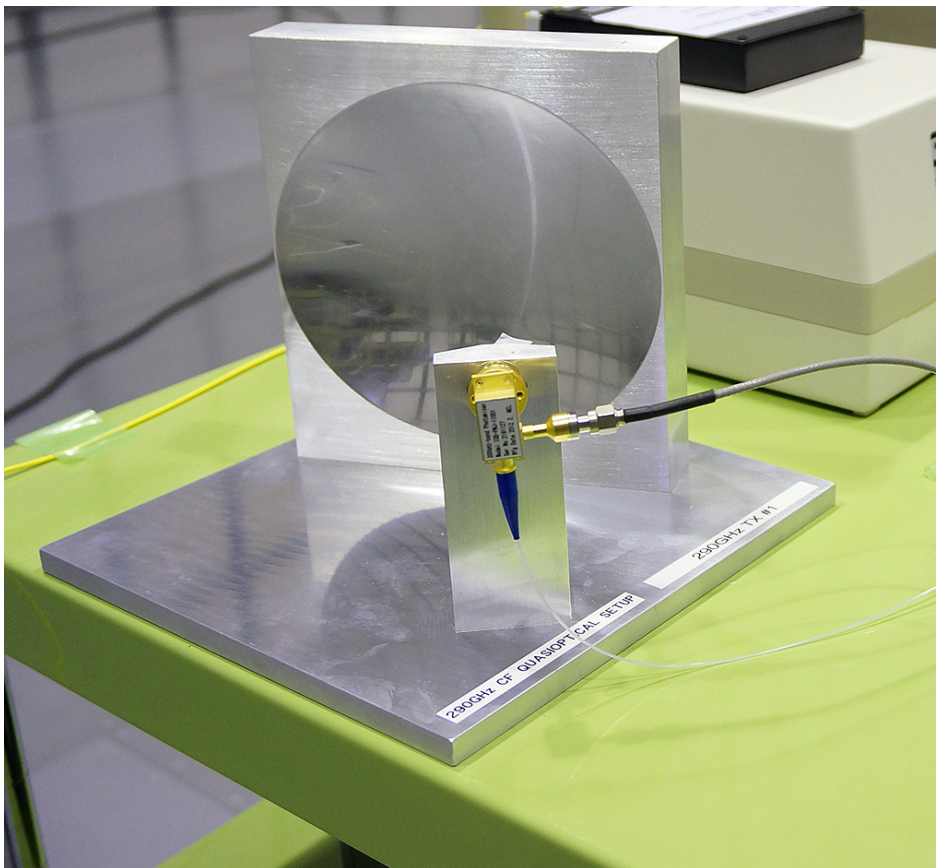


Offset parabolic antenna
Gain: 46 dBi@290 GHz

Estimated Transmission Distance using high-gain antennas (46 dBi)

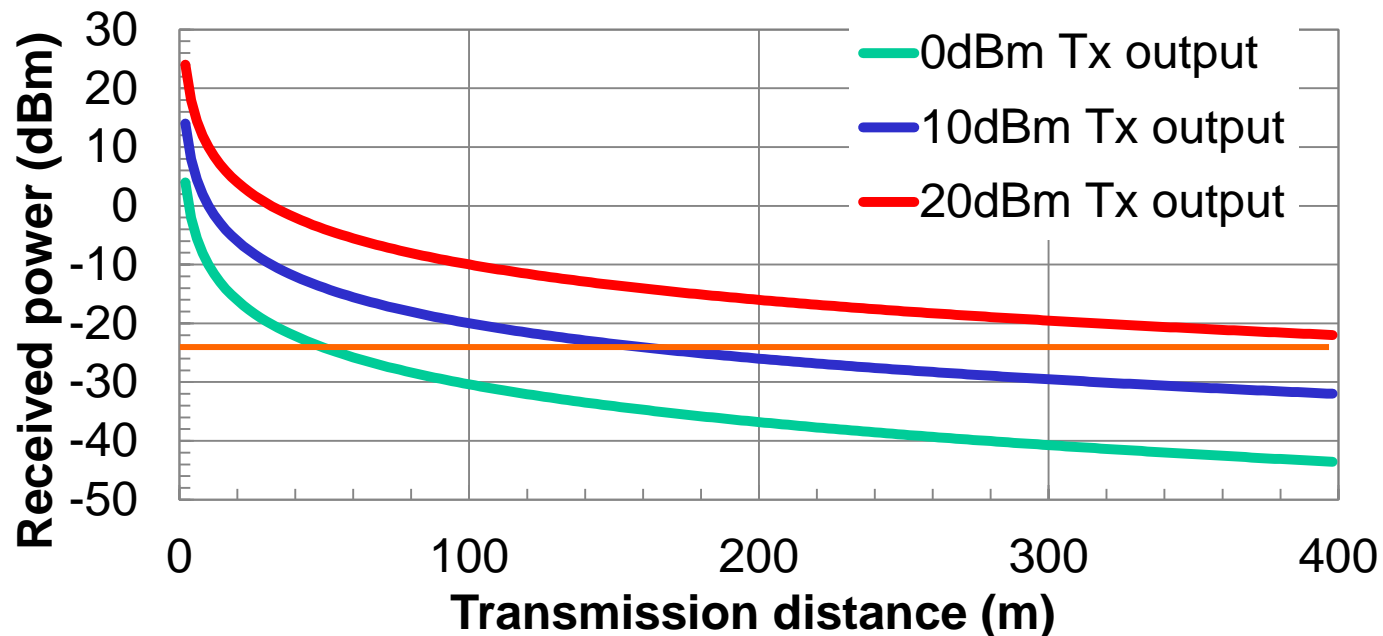


When the sensitivity was -25 dBm (corresponding photocurrent of 3.5 mA) in doc.:IEEE802.15-13-0653-00-0thz, possible transmission distance with 10 dBm output is approx. 150 m under atmospheric attenuation coefficient of 4 dB/km.

Block Diagram of Base Station

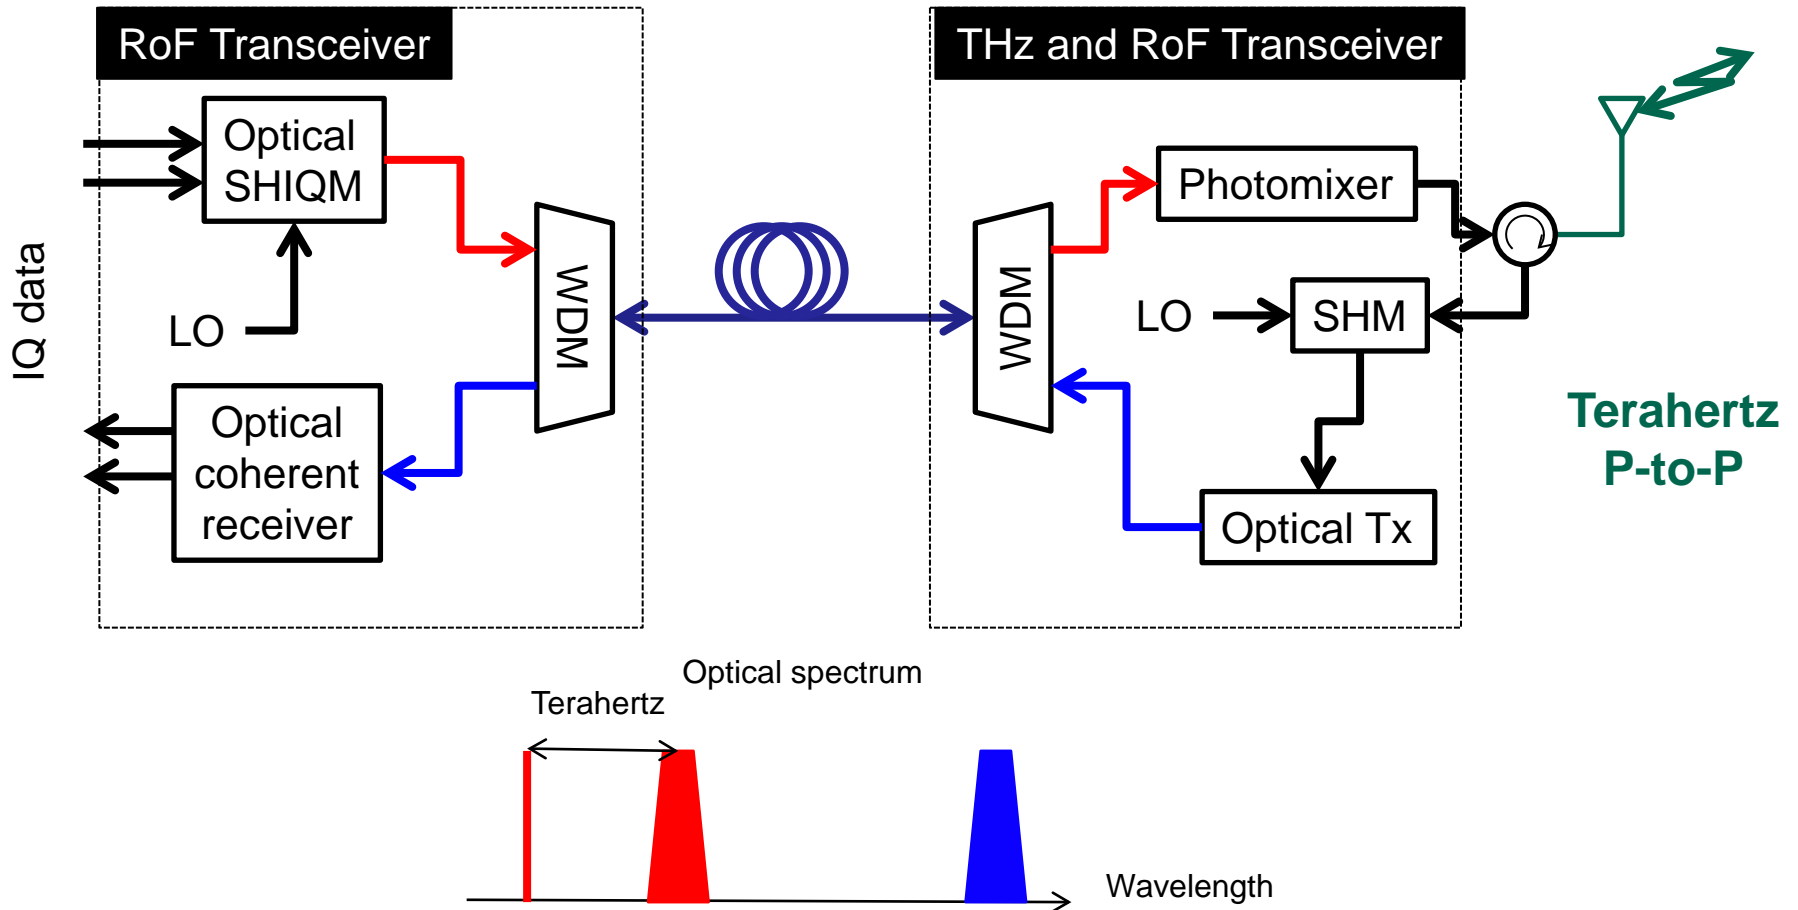

Observed SSB phase noise of 300-GHz sinusoidal signal using O-SHIQM*

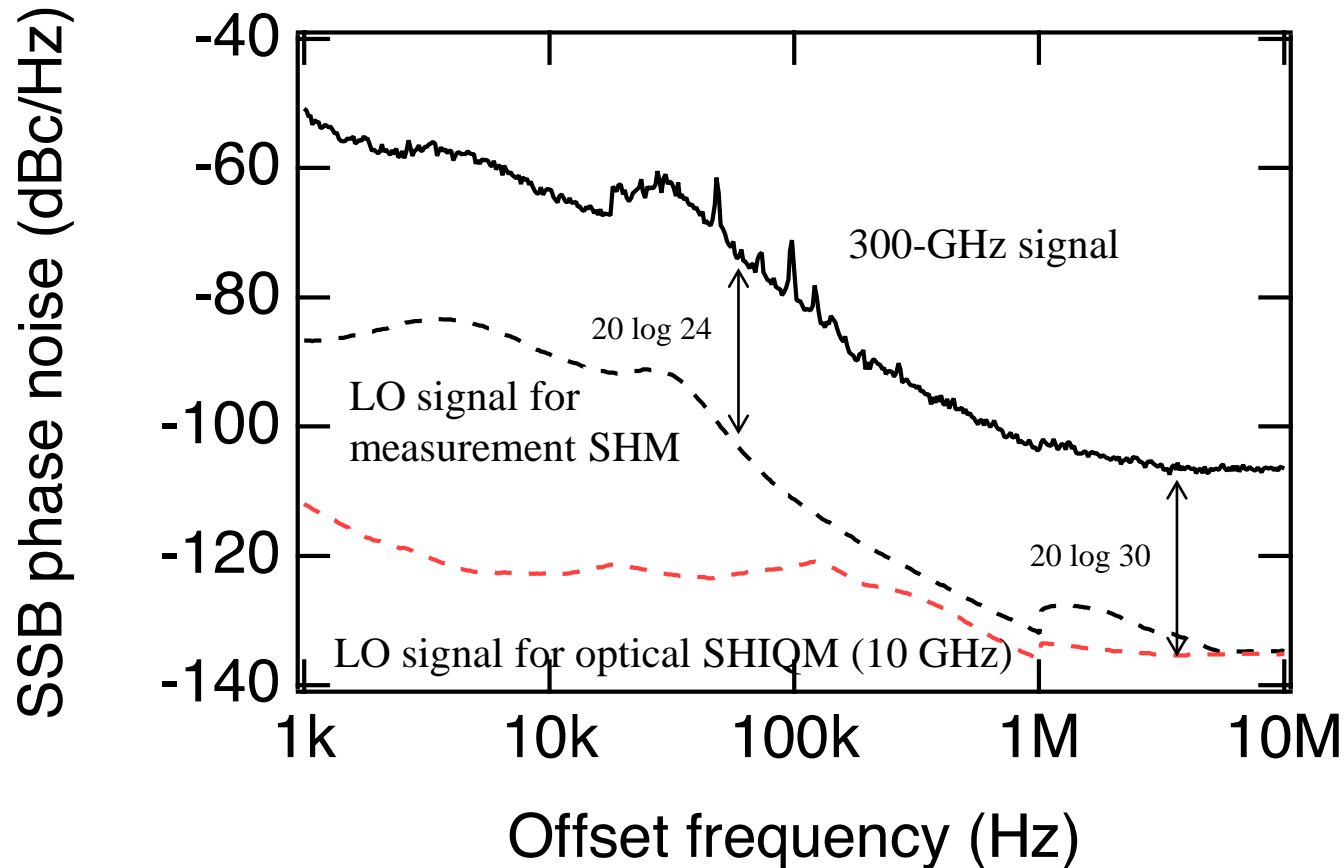

SHIQM (Sub-harmonic IQ Mixer) was presented in the document: IEEE 802.15-14-0022-00-0thz

Summary and Discussion

- RoF-based terahertz fronthaul for broadband mobile/wireless access systems is proposed again using definition adopted by ITU-T SG15 Q2 meeting held on February 20, 2014..
- The THz radio transceiver functions of base station are connected through optical fiber cables.
- Optical sub-harmonic IQ mixer using Radio over Fiber technologies has a potential to transmit and distribute high-speed modulated THz signals to THz transceivers.
- It is feasible to transmit 300-GHz frequencies over 400-m distance using high-gain antennas.