

[Fully distributed infrastructure-less proximity based direct communication for 802.16]

[IEEE 802.16 Mentor Presentation Template (Rev. 0)]

Document Number:

[IEEE 802.16-12-0462-04-Gcon]

Date Submitted:

[2012-07-16]

Source:

[Chanho Yoon, Seungkwon Cho, Sungkyung Kim, Soojung Jung, Hyungjin Kim, Sungcheol Chang, and Dongseun Kwon]

Voice: [+82-42-860-5872]

[ETRI]

E-mail: [chyoon@etri.re.kr]

[218 Gajeong-ro, Yuseong-gu, Daejeon, 305-700, Republic of Korea]

Re:

[IEEE 802.16-12-0384-02-Gdoc]

Base Contribution:

[None]

Purpose:

[To instigate discussion regarding a new project for the IEEE 802.16 Working Group, and to propose a development on infrastructure-independent direct communications for proximity-based services]

Notice:

This document does not represent the agreed views of the IEEE 802.16 Working Group or any of its subgroups. It represents only the views of the participants listed in the "Source(s)" field above. It is offered as a basis for discussion. It is not binding on the contributor(s), who reserve(s) the right to add, amend or withdraw material contained herein.

Copyright Policy:

The contributor is familiar with the IEEE-SA Copyright Policy <<http://standards.ieee.org/IPR/copyrightpolicy.html>>.

Patent Policy:

The contributor is familiar with the IEEE-SA Patent Policy and Procedures:

<<http://standards.ieee.org/guides/bylaws/sect6-7.html#6>> and <<http://standards.ieee.org/guides/opman/sect6.html#6.3>>.

Further information is located at <<http://standards.ieee.org/board/pat/pat-material.html>> and <<http://standards.ieee.org/board/pat>>.


Proximity based applications (aforementioned in [1])

- What can we get with proximity based applications?
 - Cellular traffic offloading (or data content sharing)
 - Proximity based P2P (device/service) discovery feature
 - Proximity based social commerce and advertisement
 - Proximity based social networking service (gaming, chatting, etc.)
 - Etc.
- Current issues/trends of 3GPP LTE (ProSe)
 - Network controlled proximity service
 - Discussions on supporting proximity based service are active (D2D direct discovery & local routing)
 - Proximity service for public safety
 - Out of BS coverage case


Proximity based applications via Direct Communication

- Why traffic offloading?
 - Expected exponential increase of mobile traffic

Exabytes per Month

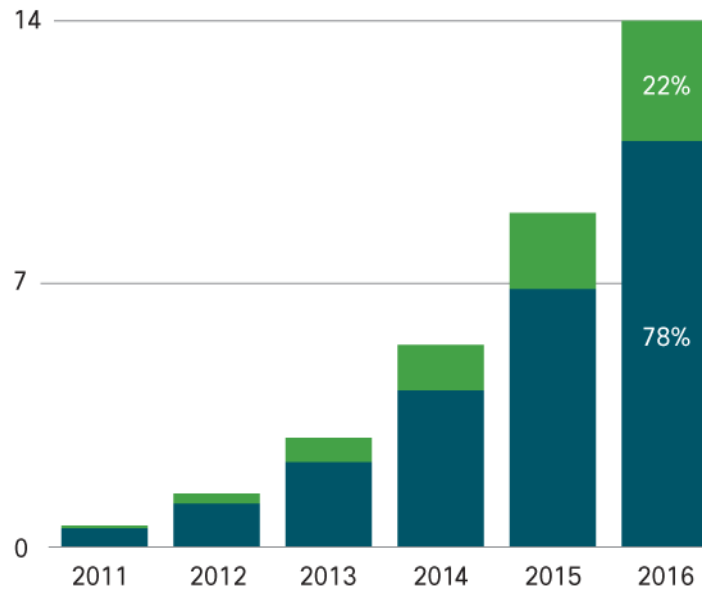


Source: Cisco VNI Mobile, 2012

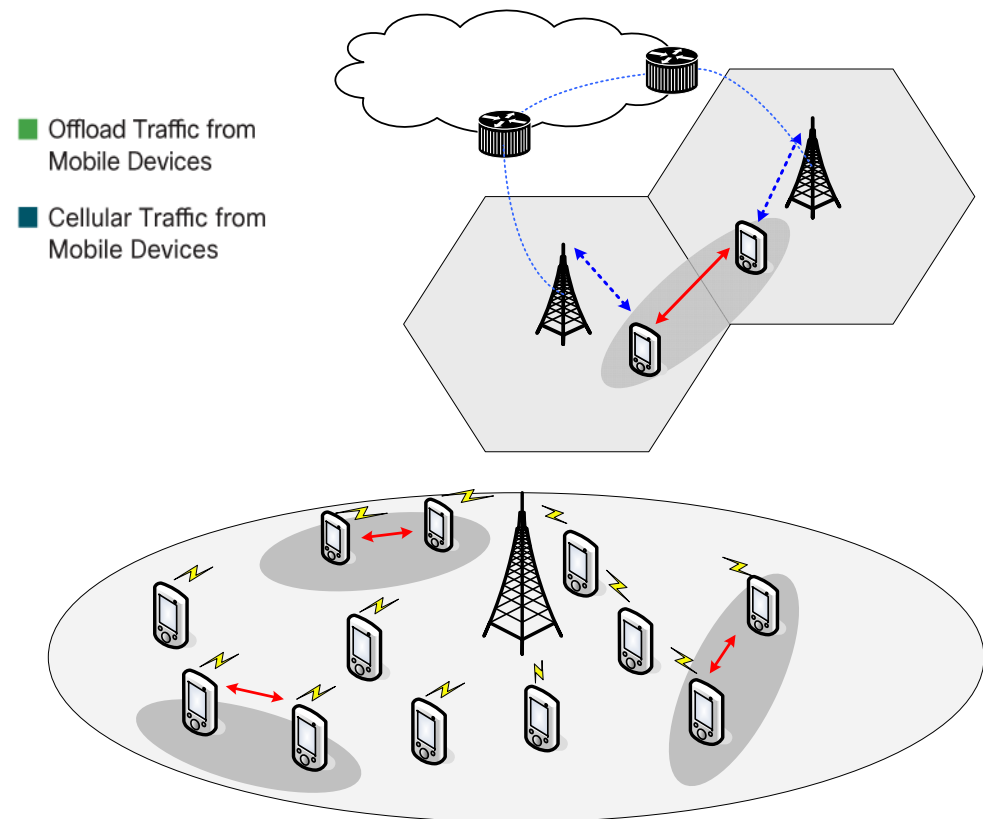

Proximity based applications via Direct Communication

- Benefits of proximity based service
 - Public information service: MS initiates direct device/service discovery

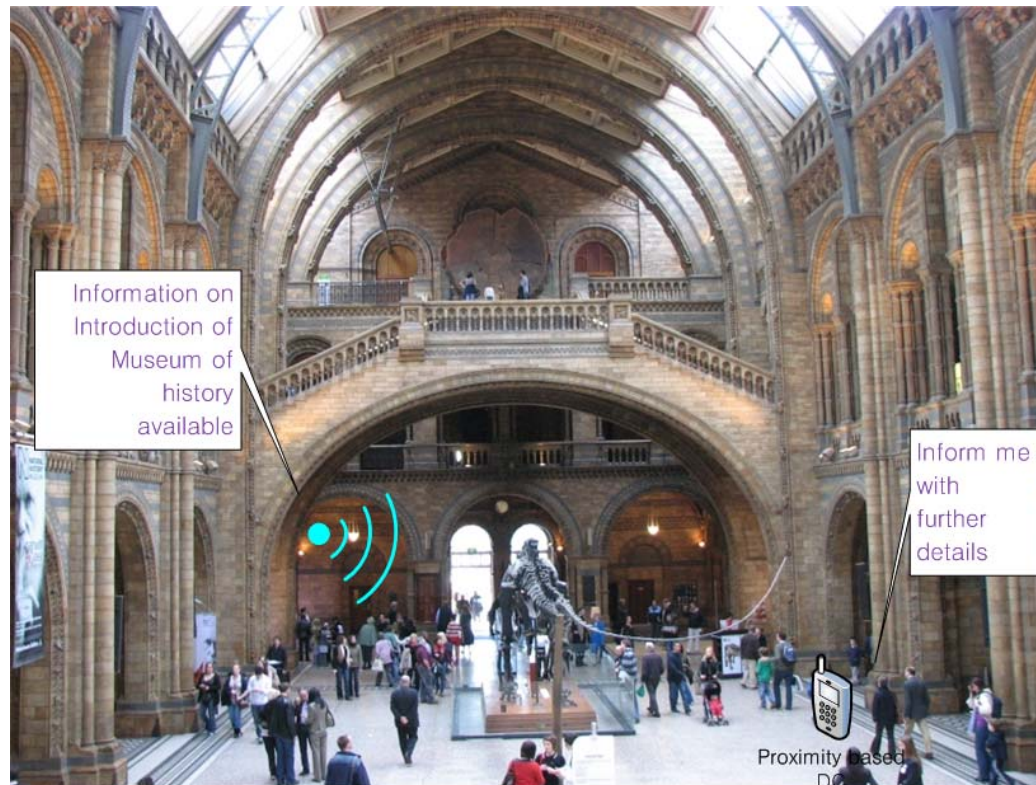

Proximity based applications via Direct Communication

- Business model of proximity based service
 - Social commerce and advertisement: MS initiates device/service discovery (e.g. iridodiagnosis)



Thoughts on current 802.16.1/1a standard

- Can IEEE 802.16 GRIDMAN TG's BS-controlled/talk-around communication support proximity based services?
 - 1) Cellular traffic offloading (Inter-BS data content sharing)
 - BS-controlled DC:
 - Limited to a single BS service area (not specifically defined for inter-BS case)
 - Talk-around DC:
 - Focused on voice application (low capacity)
 - 2) Proximity based P2P (device/service) discovery
 - BS-controlled:
 - No MS initiated proximity discovery
 - No support for device/service discovery in idle mode (before MS network entry)
 - Talk-around DC:
 - Not considered, no MS initiated proximity discovery

New amendments for 802.16 standard


- In order to support proximity based direct communication (DC) services in the current 802.16 standard, we need **a new amendment** (not a revision of GRIDMAN TG).
 - The intent of DC feature in GRIDMAN TG is primarily focused on enhancing the link reliability, not for proximate based services.
 - Undoubtedly, the GRIDNMAN's schedule for sponsor balloting is approaching in a few months.
 - Therefore, the DC feature for supporting proximity based service needs a new approach/enhancement different from GRIDMAN's.

New amendments for 802.16 standard

- To build a new PHY/MAC protocol, technically, we can think of two hierarchically top level ways
 - **a) BS dependent way:** D2D communication with the help of BS or network
 - **b) BS independent way:** let D2D communication do discovery, resource allocation, and scheduling independently. In addition, we can extend the coverage of proximity based services.
- We suggest **proximity based DC (PDC) PHY/MAC protocols** as an 802.16 enhancement.
 - In this contribution, **we suggest infrastructure-independent mode.**
 - In the other contribution (16-12-461-0x-Gcon), BS dependent mode will be presented.


New amendments for 802.16 standard

- The prime focus is on infrastructure-dependent DC. However, it is possible that this feature can be **extended to out of BS coverage (infrastructure-less) situation**.
 - Why not exploit the licensed band for out of BS coverage area cases?
 - Then, infrastructure-independent mode can setup D2D links where an MS is located out of BS coverage area (the corresponding pair is in the BS's coverage)
 - Also, infrastructure-independent mode can apply to the case of infrastructure failure due to disasters

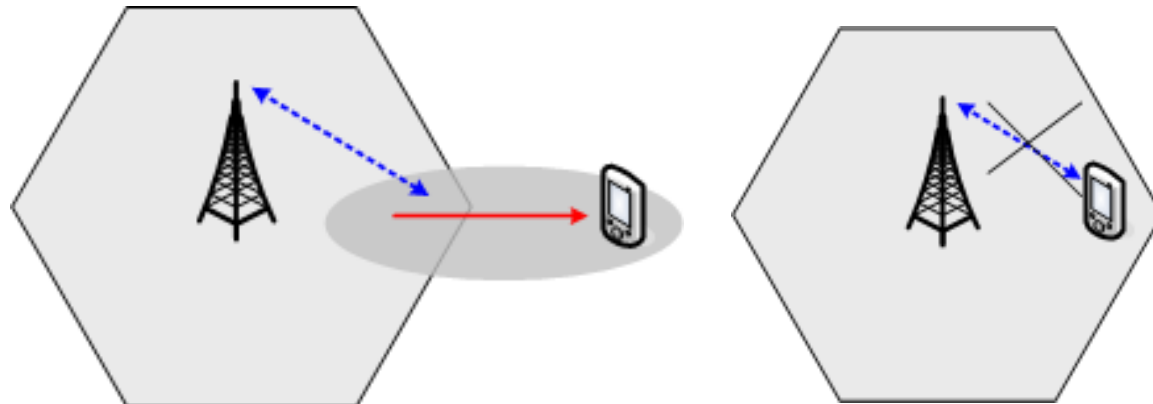



New amendments for 802.16 standard

- 1) Infrastructure-independent proximity based DC's enhanced features:
 - Direct MS initiated device/service discovery
 - Within BS coverage: BS assists finding peers, including a situation with densely populated PDC nodes
 - Out of BS coverage: devices independently finds PDC peers

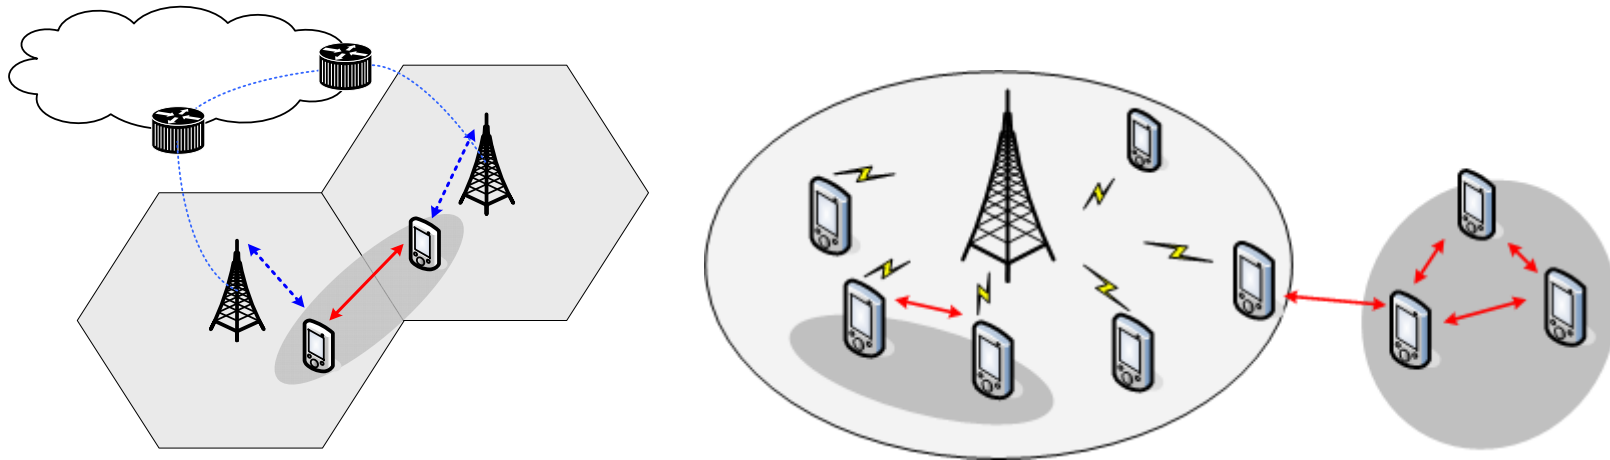


New amendments for 802.16 standard

- 1) Infrastructure-independent proximity based DC's enhanced features: (cont.)
 - Synchronization and multiple access scheme
 - MSs are able to support distributed synchronization
 - MSs are able to support distributed multiple access coordination

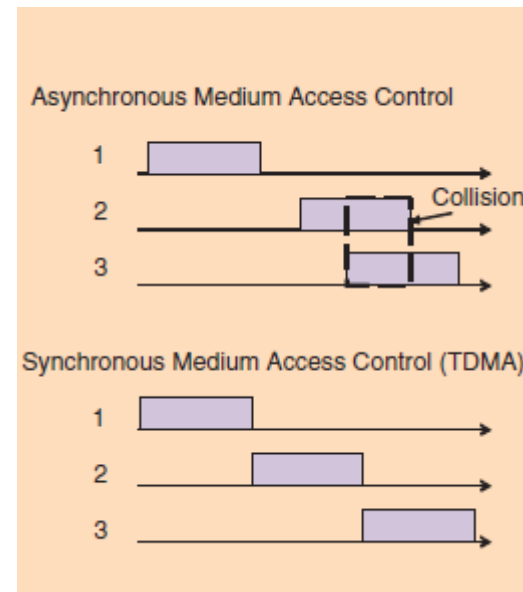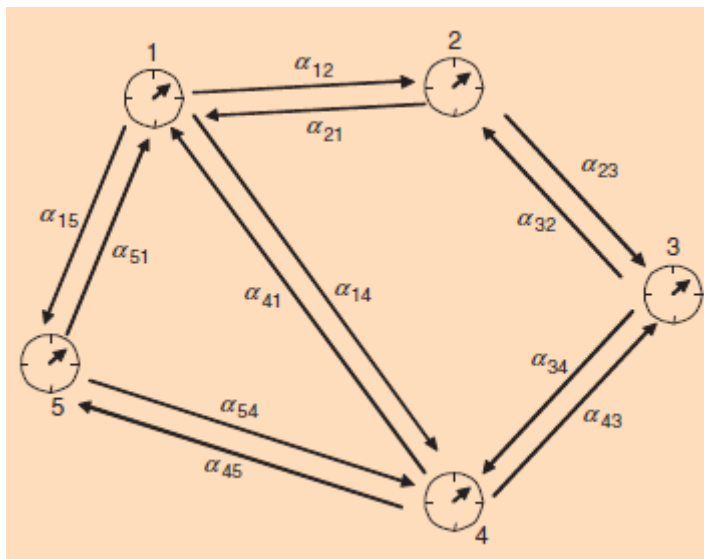

New amendments for 802.16 standard

- 1) Infrastructure-independent proximity based DC's enhanced features: (cont.)
 - Support of large coverage area
 - MSs may provide large link coverage
 - MSs may support multi-hop functionality

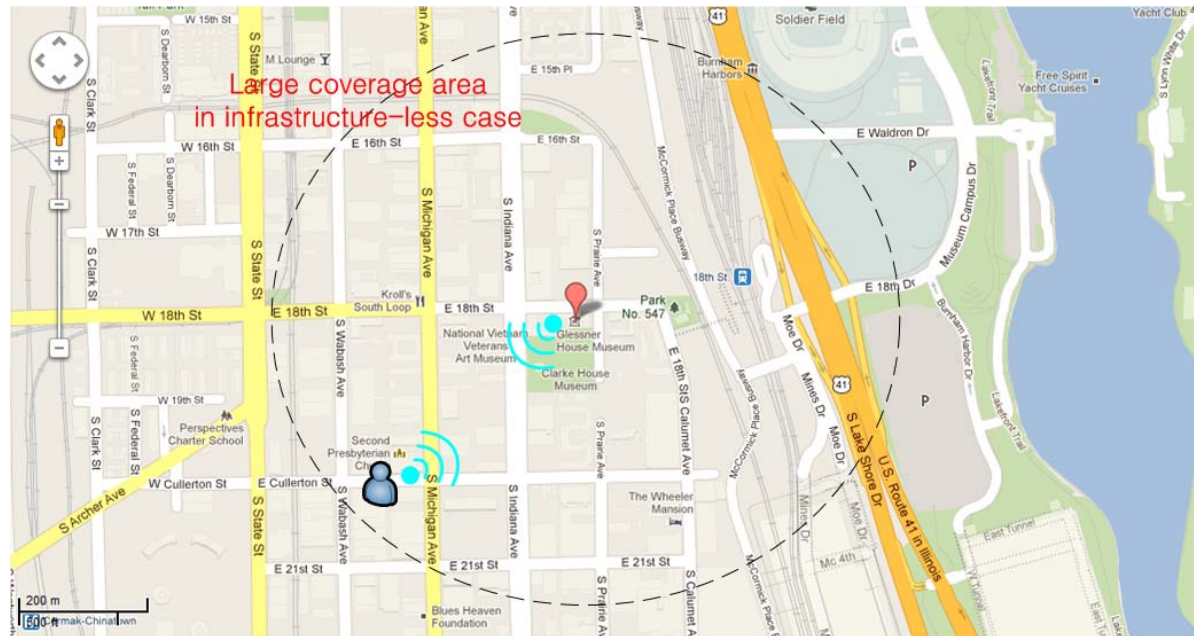

New amendments for 802.16 standard

- 1) Infrastructure-independent proximity based DC's enhanced features: (cont.)
 - Additional features in consideration
 - Power saving features
 - A fixed frame structure is preferred
 - Resource reuse
 - Spatial reuse with transmit power control
 - Possible interference [2-4] reduction by new frame structures
 - Non FDM based user resource allocation could be effective
 - To be added...

New amendments for 802.16 standard

- 2) Compatibility to current standard?
 - Backward compatibility with 802.16 OFDMA based standard? Yes
 - No change required for legacy 802.16m PHY/MAC specification, but some additional amendments for proximate DC PHY/MAC protocol.
- Amendment to the 802.16 could make above possible
 - The amendment shall be a **comprehensive standard of BS dependent DC** for proximity based applications supporting various use cases:
 - MS to MS associated with BSs
 - MS to MS each associated with different BSs
 - MS to MS, only one of the pair is associated with a BS
 - MS to MS not associated with any BSs (out of BS coverage)

Conclusions

- Both contributions have a common notion that quite a few proximity based direct communication use cases expect MS to trigger device/service discovery.
- The discussion on infrastructure-dependent case is discussed in 16-12-0461-0x-Gcon, whereas this contribution is focused on infrastructure-independent cases. Both cover proximity based direct communication in the following situations:
 - MS to MS paired/associated with a single BS
 - MS to MS pair, each associated with different BSs
 - MS to MS pair, only one of the pair is associated with a BS
 - MS to MS not associated with any BSs (out of BS coverage)

Why a new TG?

- To fully support the aforementioned proximity based applications and new features currently unavailable in the latest 802.16 standard
- To develop a distinctive MS-initiated infrastructure-dependent and/or infrastructure-independent direct communication standard with backward compatibility to existing 802.16 protocols
- Therefore, we need a comprehensive amendment of infrastructure-dependent and infrastructure-independent proximate DC to support such.

Proposal

- Call for contributions
 - Seeking contributions and participations for building a new PAR & 5G on proximate direct communication (PDC) to support proximity based applications

Suggested Tentative Timeline for TG PDC

- Forward draft PAR and 5C statement to IEEE 802 Sept. 2012
- Submit PAR and 5C to NesCom Nov. 2012
- PAR approval by IEEE-SA Standards Board Dec. 2012
- TG formation (IEEE 802.16 WG #83) Jan. 2013
- IEEE 802.16 WG #84 Mar. 2013
- IEEE 802.16 WG #85 May 2013
- IEEE 802.16 WG #86 July 2013

**Thank You
Questions?**

References

- [1] W. Shin, J. Cha, A. Lee, E. Kim, and K. Lim, “802.16 enhancements to support direct communications for proximity-based applications”, IEEE 802 doc. 16-12-0353-01-Gcon.
- [2] K. Doppler, M. Rinne, C. Wijting, C. Ribeiro, and K. Hugi, “Device-to-device communication as an underlay to LTE-advanced networks”, *Communications Magazine*, IEEE, vol.47, no. 12, pp.42-49, Dec. 2009.
- [3] P. Janis, V. Koivunen, C. Ribeiro, J. Korthonen, K. Doppler, and K. Hugi, “Interference-aware resource allocation for device-to-device radio underlaying cellular networks”, *IEEE VTC Spring 2009*, IEEE 69th, pp.1-5.
- [4] T. Chen, G. Charbit, and S. Hakola, “Time hopping for device-to-device communication in LTE cellular system” *IEEE WCNC 2010*, pp.1-6.